



MIYAWAKI®

Advanced Solutions for Steam and Condensate Management

About MIYAWAKI

90 years Experience, Technology and Quality



The company MIYAWAKI has 90 years history as one of the leading Japanese manufacturers of equipment for steam and condensate lines.

MIYAWAKI has a long experience as the leading supplier of steam traps for oil refineries and chemical plants in Japan. Besides of steam traps the company offers a wide range of pressure reducing valves for steam and other media, steam-water-mixing valves, separators, strainer, sight glasses and other ancillary equipment.

MIYAWAKI offers sophisticated hardware and software solutions for managing the steam trap population in a plant.

As the world leader of the production of bimetallic temperature control steam traps, the most effective steam traps for steam tracing and steam main lines in the sense of energy conservation, MIYAWAKI contributes substantially to the reduction of CO₂ emissions and to the development of a healthy environment.

Our mission



Kensuke Miyawaki,
President, member
of the executive board
of MIYAWAKI Inc.

"MIYAWAKI's mission is to promote the ideas of energy saving and environmental protection, to fulfil the deliveries of its products with a high rate of reliability and to provide a high level of technical support for our products.

Reducing the consumption of energy in the form of steam is an extremely important goal of each modern industrial enterprise. Steam Traps are able to play an important role in this process, because by improving the management of the steam and condensate system and by regular professional steam trap surveys, up to 40% of the steam losses can be reduced which are not caused by the manufacturing process.

We have every confidence that the high quality of MIYAWAKI products will enable our customers to save energy and to meet their production goals."

Our history

MIYAWAKI opened its doors in 1933 and began designing steam traps for industrial use. In 1949, after extensive experiments and tests, MIYAWAKI developed an entirely new type of steam trap, with a "Duplex"-type valve, a double-ported valve operating by the pressure differential to increase the condensate capacity.

In the following years, the design was further refined and sales soared to the point where by 1953 the company MIYAWAKI Steam Trap Manufacturing Co., Ltd. was able to incorporate. Along with the development and sales of products other than steam traps, the name changed to MIYAWAKI Inc. in April 1986.


To emphasize the growing international activities of MIYAWAKI Inc., in June 1991 the subsidiary company MIYAWAKI GmbH was established in Germany. Later a joint venture in Russia had been opened. In April 2018, the subsidiary company MIYAWAKI WEST Co., Ltd was established in China. In December 2024, the subsidiary company MIYAWAKI Korea Inc. was established in the Republic of Korea. During the last decade the network of sales representatives around the world was enlarged considerably.



| | |
|---|---|
| MIYAWAKI certificates | 4 |
| Pressure Equipment Directive 2014/68/EU | 5 |
| Steam Trap Selection Guide | 6 |

Steam Traps

| | |
|-------------------------------------|---------|
| Temperature Control Trap | 7 – 14 |
| Thermostatic Radiator Trap | 15 – 16 |
| Balanced Pressure Thermostatic Trap | 17 – 20 |
| Thermodynamic Disc Trap | 21 – 28 |
| Inverted Bucket Trap | 29 – 35 |
| Ball Float Trap | 37 – 51 |
| Steam Trap with Two-bolt connection | 53 – 54 |
| Pumping Trap | 55 – 60 |

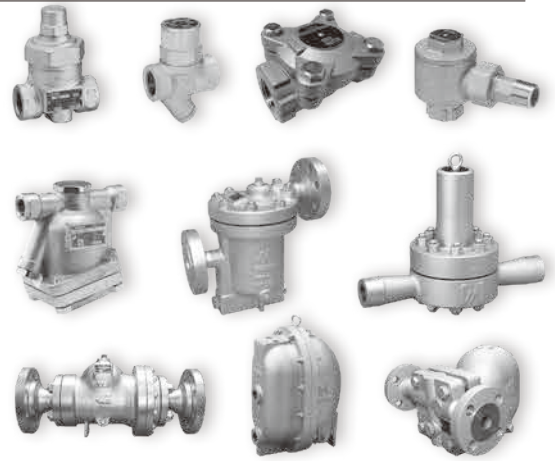

Air Traps

| | |
|----------|---------|
| Air Trap | 61 – 67 |
|----------|---------|



Air Vents

| | |
|----------|---------|
| Air Vent | 69 – 72 |
|----------|---------|



Pressure Reducing Valves

| | |
|-------------------------|---------|
| Pressure Reducing Valve | 73 – 82 |
|-------------------------|---------|



Manifold

| | |
|---------------------------|---------|
| Steam/Condensate Manifold | 83 – 84 |
|---------------------------|---------|



Hot Water Supplying System

| | |
|--|---------|
| SteamFired Instantaneous Water Heater Circulation Method | 85 – 86 |
| SteamFired Instantaneous Water Heater One-Way Method | 87 – 89 |
| Steam-Water-Mixing Valve, Water Gun, | 90 – 91 |



Ancillary Equipment

| | |
|---|---------|
| Check Valve, Blow-down Valve | 92 |
| Strainer, Vacuum Breaker, Anti-Freezing Valve | 93 |
| Sight Glass | 94 |
| Separator | 95 |
| Two-Bolt Connectors | 96 – 97 |




Testing Equipment

| | |
|------------------------------|-----------|
| Steam Trap Survey Assistant | 98 – 99 |
| Steam Trap Management System | 100 – 101 |



MIYAWAKI-Technology

| | |
|--------------|-----------|
| SCCV®-System | 102 – 103 |
|--------------|-----------|



International Comparison and Conversion

| | |
|--|-----------|
| Material Standards and Temperature, Flange Standards | 104 – 105 |
| Pressure, Steam Pressure Table | 106 – 107 |

English Edition 2025
No. PG-11_2501E

In the interest of the development and improvement of our products, MIYAWAKI Inc. reserves the right to change the specification of the products.

© MIYAWAKI Inc.

Quality, Performance and Challenges to energy saving

Since 1933, MIYAWAKI has committed itself to a policy of **uncompromising quality, performance and challenges to energy conservation.**

Research and development has a high priority at MIYAWAKI. To meet industry's demands and to ensure quality, MIYAWAKI invests heavily in the best personnel, facilities, manufacturing techniques and quality control systems available today.

This policy of „**Technology First**“ has resulted in major advances in steam trap design and operation.

As a result of the certification MIYAWAKI can assure all our customers of its continuing policy of high quality standards and of the fact that all products are manufactured in accordance with international regulations and technical requirements.

ISO 9001



ISO 14001



European Directive 2014/68/EU



Certificate of Conformity Russia



Pressure Equipment Directive 2014/68/EU of the European Parliament and of the Council



In the course of the harmonization of the laws of the EU Member States concerning pressure equipment, the Pressure Equipment Directive 97/23/EC (PED) had been adopted in May 1997. The Directive came into effect on 30 May 2002. Considering the experience and changes during the implementation of the Directive 97/23/EC, the European Union published on June 27, 2014 the new Pressure Equipment Directive 2014/68/EU. The new Directive entered into force on July 19, 2016.

According to the PED all manufacturers of pressure equipment covered by the PED, are under the obligation to subject each item of equipment to one of the conformity assessment procedures described in the PED. The conformity assessment procedures to be applied to an item of pressure equipment with a view to

affixing the CE marking shall be determined by the category, in which the equipment is classified. In this connection it is necessary to take into consideration the statement of the PED, that pressure equipment which is subject to Article 4, Section 3 of the PED "...shall be designed and manufactured in accordance with the sound engineering practice of a Member State in order to ensure safe use. ... Such equipment ... shall not bear the CE marking referred to in Article 18" of the PED.

In cooperation with TÜV GmbH, MIYAWAKI Inc., Osaka, Japan examined all products with respect to the PED and certified its production process in accordance with Module A2 of the PED (internal manufacturing checks with monitoring of the final assessment).

As a result of this certification process MIYAWAKI Inc. draws the following conclusions:

1. The following MIYAWAKI products are classified according to Article 4, Section 3 of the PED which does not allow to bear the CE marking:

Steam Traps:

TB1N, TBU4, TB7N, TB9N, TB51, TB52, TBH71, TBH72, TBH81, TBH82, W, DC1, DC2, DV1, DL1, DX1, DF1, S31N, SC31, SC, SF, SV, SL, SU2N, SU2H, SD1, S55N, S55H, S61N, S62N, ER105, ER110, ER116, ES5, ESU5, ES8N, ES10, ES12N, ESH8N, G11N, G12N, G3N-10R (to DN65), G3N-16R (to DN50), G2, GC1N, GC20N, G20N, G30

Steam Pressure Reducing Valves: RE1, RE2, RE3, REC1, RE10N

Steam-Water-Mixing Valve: MX1N

Composite Trap Connector: CTC-P

All above MIYAWAKI products are designed and manufactured in accordance with the sound engineering practice as requested by the PED.

2. Steam traps not included into point 1 belong to category I or category II according to Annex II & III of the PED. They will bear the CE marking and the conformity with the PED will be confirmed by issuing a declaration of conformity.



As a result of the certification by TÜV GmbH, MIYAWAKI can assure all our customers of its continuing policy of high quality standards and of the fact, that all products are manufactured in accordance with the regulations and technical requirements of the EU.

| | | First Choice | Second Choice |
|---------------------------------------|-------------------------------------|--------------------------|------------------------|
| Steam Mains | < 1,6 MPa | TB9N | GC1, D, S, ES |
| | < 2,1 MPa | TB7N | GC1, S |
| | < 6,4 MPa | TB51, TB52 | S61N, S62N, ESH |
| | < 20,0 MPa | TBH71, 72, 81, 82 | |
| Process Equipment | Heater | G, ES, ER | S |
| | Heat Exchanger | G | ES, ER |
| | Vaporizer | G | ES, S |
| | Distiller | D | ES, S |
| | Sterilizer | D | ES, G, S |
| | Cylinder Dryer | ES, ER | |
| | Band Dryer | G | ES, ER, D |
| | Multi-Platen Presses | G | ES, D, S |
| | Vulcanizer | D | S, ES |
| | Tyre Presses | D | S, ES |
| Autoclaves | D | G, ES | |
| Laundry Equipment | Dryer | G | ES, D, S |
| | Tumbler | ES, ER | D, S |
| | Presses | D | S, ES |
| | Steam Mannequins | D | ES, S |
| | Steam Iron | SL3 | SD1 |
| | Steam Mangles | D, G | ES, S |
| Food Processing Equipment | Process Boiling Pans | G | ES, D |
| | Hot Tables | D, G | ES |
| | Jacketed Boiling Pans | D | G, ES, S |
| | Tilting Pans | ES | D |
| | Brewing Pans | G | ES, D |
| | Evaporator | G | ES, ER |
| | Retorts | G | ES, ER |
| Heating & Air Conditioning | Steam Radiator | W | D |
| | Unit Heaters | G | ES |
| | Convectors | W | D, ES |
| | Radiant Panels | W | D, ES |
| | Air Heater | D | ES, G |
| | Air Humidifiers | ES, G | D, S |
| | Heating Coils | D, ES | G, S |
| | Air Conditioning Units | ES, G | D |
| | Calorifiers | G, ES | D |
| Tracing | Steam Tracer Lines | TB | D |
| | Tank Heating | TB | D, ES, S |
| | Copper Tracing (Instrument Tracing) | TB1N | DC1 |

Disclaimer: This Guide is offered as a recommendation guide only and is not intended to replace the selection by a qualified person.

Temperature Control Steam Traps

SERIES TB

Temperature Control Steam Traps are bimetallic steam traps which do not follow the steam saturation curve. The discharge temperature can be adjusted manually, what allows to adopt these steam traps to a wide range of applications, where optional undercooling is possible and where sensible heat savings and flash steam reduction are desirable. These steam traps are perfectly fitted for reducing the steam consumption at steam main and steam tracing lines thus guaranteeing a high degree of energy savings.

| | |
|-------------------------------|---|
| Models TB7N & TB9N | with forged steel body for low and medium pressure applications |
| TBU4, TBU4B | with stainless steel body for low pressure tracing |
| TB1N | with steel body for low pressure applications |
| TB51/52 | with forged steel body for high pressure applications |
| TBH71/72/81/82 | with cast steel body for high pressure applications |

Features


- All traps are equipped with the patented valve mechanism SCCV®-System (see pages 94 – 95).
- The SCCV®-System ensures a superior closing performance in the center of the port, greatly reduced wear of the internal parts and extended lifetime of the trap.
- Highly efficient in energy conservation – eliminates virtually 100% of steam loss.
- Continuous discharge of the condensate according to the adjusted temperature – not influenced by inlet pressure changes.
- Inline repairable – easy and quick replacement of the bimetal unit and the seat.
- Readjustment possible while the trap is in operation (for low pressure applications).
- All traps equipped with integral strainer.
- Can be installed both horizontally and vertically.

Suitable for:

| | |
|-----------------------|---|
| TB7N | Steam main lines and tracing lines |
| TB9N | Steam main lines, tracing and small heat exchanger applications with specific condensate undercooling |
| TBU4, TB1N | Steam tracing lines |
| TB51/52 | High pressure steam main lines |
| TBH71/72/81/82 | High pressure steam main lines |

Operating principle

■ cold condensate ■ hot condensate

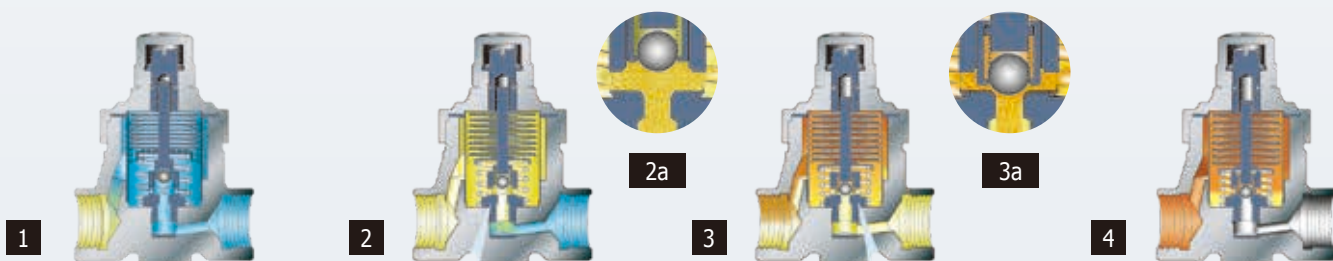

1) On start-up, the bimetal discs are all flat and the valve shaft is up with the valve fully open. Virtually all cold condensate and air are discharged.

2) As the temperature of the condensate increases, the bimetal discs begin to curve gradually and force the valve shaft and the valve holder to move down.


2a) Most of the condensate is still discharged quickly, since the valve and the holes in the fixed guide on the valve seat are still fully open.

3) When condensate with higher temperature (near to set temperature) flows in, the bimetal discs are curved even more and at the same time the valve shaft moves down and the valve holder closes the holes in the guide partially.

3a) The amount of condensate being discharged is reduced quickly. This prolongs the time that the hot condensate stays near the bimetal discs and the heat of the condensate is transferred to the bimetals much more effectively.

4) In case of very low condensate flow, the holes in the guide are closed completely by the valve holder and the valve will close precisely in the center of the seat. Normally, the trap is filled with hot condensate and the operation will rest in the state shown in figure 3. Condensate will be discharged continuously at a stable temperature (very close to the set temperature).

TB7N



Available options TB7N

- with ball valve (TB7BN-C)
- with blow valve (TB7BN-R)
- with scale removal (TB7N-SR)

Special version TB7N-P

with maximum operating pressure 2,7 MPa / 392 psig

Special face-to-face dimensions available.

* **Curve 1** shows the trap's maximum capacity when discharging cold condensate.

** **Curve 2** shows the trap's maximum capacity when discharging hot condensate at a temperature of 10°C (18°F) below the adjusted temperature of the trap.

Standard factory setting*:

100°C at 1,0 MPa (212°F at 145 psig)

* Settings may differ in various regions.


For more information please contact us.

Max. allowable pressure (PMA) = 4,0 MPa (580 psig)


Max. allowable temperature (TMA) = 400°C (752°F)

Dimensions


TB7N / TB7NW

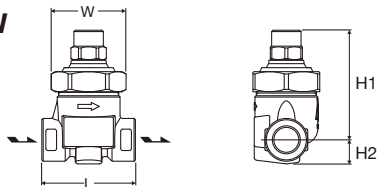


TB7NF

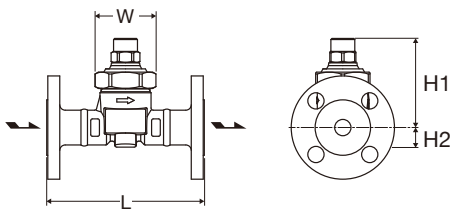

Capacity Chart TB7N

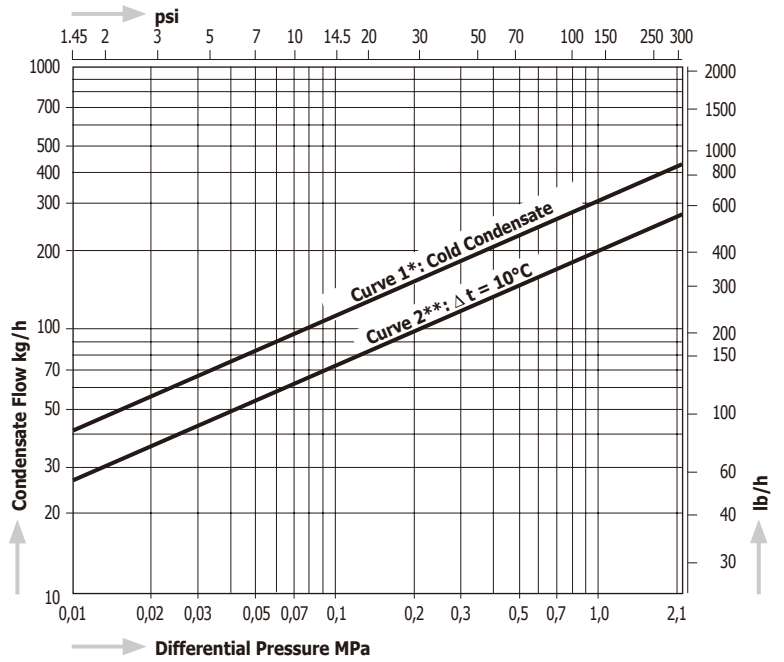

Temperature Stroke Chart TB7N

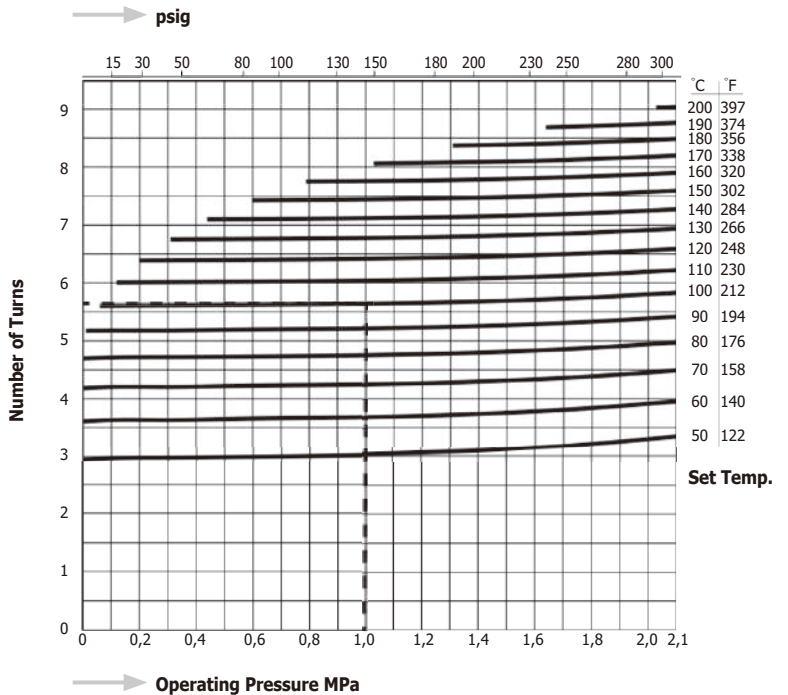


| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Adjustable Range | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | | |
|-------|----------------------------|------|-------------------------|------|----------------------------|-----|------------------|-----------|-----------------|----|----|-----|-----------------|-----|-------------------|-------------------|-------------------|-------------------|------------|-------------------|
| | | | MPa | psig | °C | °F | °C | °F | L | H1 | H2 | W | L | H1 | H2 | W | | kg | lb | |
| TB7N | Screwed Rc, NPT | 1/2" | 2,1 | 305 | 350 | 662 | 50 – 200 | 122 – 392 | 70 | 18 | 56 | 2,8 | 0,7 | 2,2 | Forged Steel A105 | 0,9 | 2,0 | | | |
| | | 3/4" | | | | | | | 82 | 19 | 56 | 3,1 | 0,8 | | | 1,0 | 2,2 | | | |
| | | 1" | | | | | | | 80 | 23 | 56 | 3,1 | 0,9 | | | 1,1 | 2,4 | | | |
| TB7NW | Socket Weld JIS, ASME, DIN | 1/2" | 2,1 | 305 | 350 | 662 | 50 – 200 | 122 – 392 | 70 | 18 | 56 | 2,8 | 0,7 | 2,2 | Forged Steel A105 | 0,9 | 2,0 | | | |
| | | 3/4" | | | | | | | 82 | 19 | 56 | 3,1 | 0,8 | | | 1,0 | 2,2 | | | |
| | | 1" | | | | | | | 80 | 23 | 56 | 3,1 | 0,9 | | | 1,1 | 2,4 | | | |
| TB7NF | Flanged JIS, ASME | 1/2" | 2,1 | 305 | 350 | 662 | 50 – 200 | 122 – 392 | 145 | 82 | 56 | 5,7 | 3,2 | 0,7 | 2,2 | Forged Steel A105 | 2,0-2,6 *1 | 4,4-5,7 *1 | | |
| | | 3/4" | | | | | | | 150 | 19 | 56 | 5,9 | 3,2 | 0,8 | | | 2,2 | 2,5-3,4 *1 | 5,5-7,5 *1 | |
| | | 1" | | | | | | | 160 | 23 | 56 | 6,3 | 3,2 | 0,9 | | | 2,2 | 3,2-4,2 *1 | 7,0-9,3 *1 | |
| | Flanged DIN PN40 | DN15 | 2,1 | 305 | 350 | 662 | 50 – 200 | 122 – 392 | 150 | 82 | 18 | 56 | 5,9 | 3,2 | 0,7 | 2,2 | Forged Steel A105 | 2,6 | 5,7 | |
| | | DN20 | | | | | | | 150 | 18 | 56 | 5,9 | 3,2 | 0,7 | 2,2 | | | Forged Steel A105 | 3,4 | 7,5 |
| | | DN25 | | | | | | | 160 | 18 | 56 | 6,3 | 3,2 | 0,7 | | | | | 2,2 | Forged Steel A105 |


*1 Depending on size and flange standard the weight of the traps differs. Please, look at our technical drawings.

Stainless Steel as body material is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.

TB9N



Screwed & Socket Weld



Flanged Connection



with Ball Valve



with Blow Valve



with Scale Removal

Available options TB9N

- with a ball valve (TB9BN-C)
- with a blow valve (TB9BN-R)
- with scale removal (TB9N-SR)

Special face-to-face dimensions available.

* **Curve 1** shows the trap's maximum capacity when discharging cold condensate.

** **Curve 2** shows the trap's maximum capacity when discharging hot condensate at a temperature of 10°C (18°F) below the adjusted temperature of the trap.

The dashed line shows the standard factory setting:

100°C at 0,5 MPa (212°F at 73 psig)

Max. allowable pressure (PMA):



4,0 MPa (580 psig)

Max. allowable temperature (TMA):



400°C (752°F)

Dimensions


TB9N / TB9NW




TB9NF



Capacity Chart TB9N

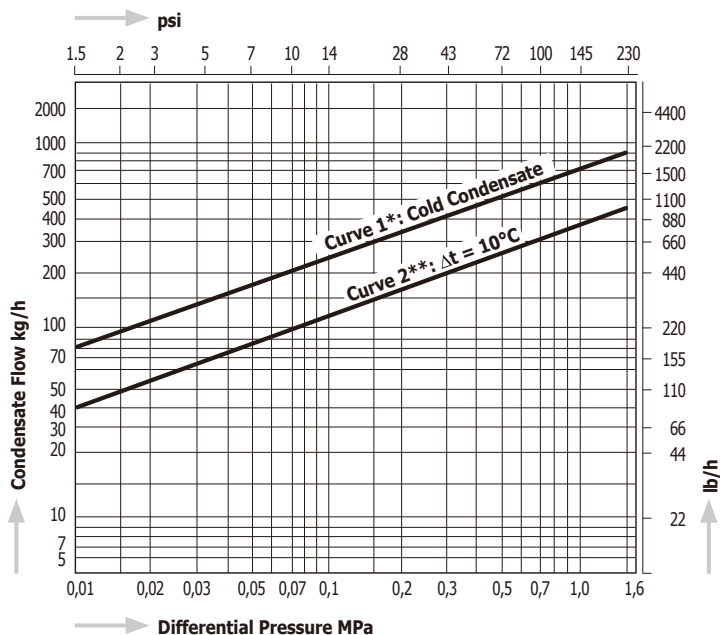

Temperature Stroke Chart TB9N


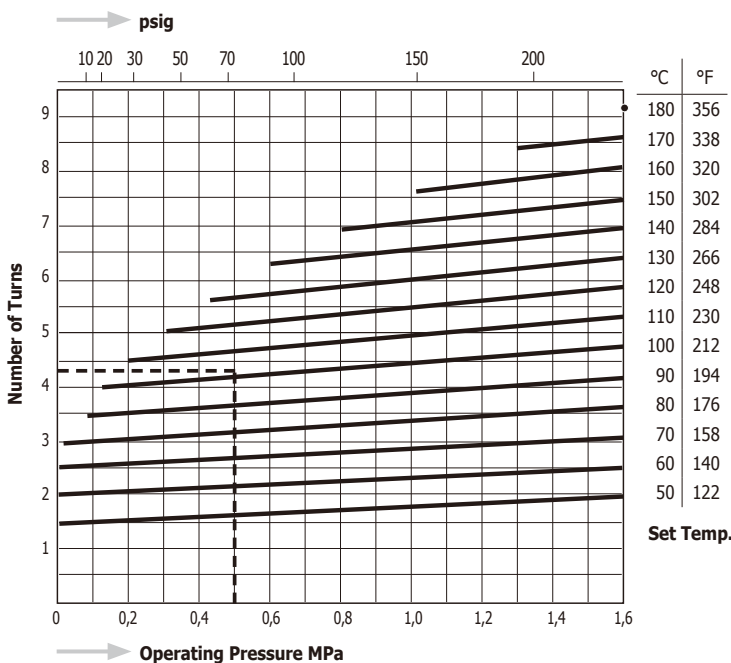


| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Adjustable Range | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|-------|-------------------------------|------|-------------------------|------|----------------------------|-----|------------------|-----------|-----------------|----|-----|-----|-----------------|-----|----------------------|------------|---------------|--------|----|
| | | | MPa | psig | °C | °F | °C | °F | L | H1 | H2 | W | L | H1 | H2 | W | | kg | lb |
| TB9N | Screwed RC, NPT | 1/2" | 1,6 | 230 | 350 | 662 | 50 - 180 | 122 - 356 | 70 | 18 | 2,8 | 3,2 | 0,7 | 2,2 | Forged Steel A105 | 0,9 | 2,0 | | |
| | | 3/4" | | | | | | | 82 | 19 | 3,1 | | | | | 1,0 | 2,2 | | |
| | | 1" | | | | | | | 80 | 23 | 3,1 | | | | | 1,1 | 2,4 | | |
| TB9NW | Socket Weld JIS, ASME, DIN | 1/2" | 1,6 | 230 | 350 | 662 | 50 - 180 | 122 - 356 | 70 | 18 | 2,8 | 3,2 | 0,7 | 2,2 | Forged Steel A105 | 0,9 | 2,0 | | |
| | | 3/4" | | | | | | | 82 | 19 | 3,1 | | | | | 1,0 | 2,2 | | |
| | | 1" | | | | | | | 80 | 23 | 3,1 | | | | | 1,1 | 2,4 | | |
| TB9NF | Flanged JIS, ASME | 1/2" | 1,6 | 230 | 350 | 662 | 50 - 180 | 122 - 356 | 145 | 18 | 5,7 | 3,2 | 0,7 | 2,2 | Forged Steel A105 | 2,0-2,5 *1 | 4,4-5,5 *1 | | |
| | | 3/4" | | | | | | | 82 | 19 | 5,7 | | | | | 2,5-3,4 *1 | 5,5-7,5 *1 | | |
| | | 1" | | | | | | | 82 | 23 | 5,7 | | | | | 3,2-4,2 *1 | 7,0-9,3 *1 | | |
| | Flanged DIN PN40 | DN15 | 1,6 | 230 | 350 | 662 | 50 - 180 | 122 - 356 | 150 | 18 | 5,9 | 3,2 | 0,7 | 2,2 | Forged Steel A105 | 2,6 | 5,7 | | |
| | | DN20 | | | | | | | 82 | 18 | 5,9 | | | | | 3,4 | 7,5 | | |
| | | DN25 | | | | | | | 160 | 18 | 6,3 | | | | | 4,0 | 8,8 | | |

*1 Depending on size and flange standard the weight of the traps differs. Please, look at our technical drawings.

Stainless Steel as body material is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.

TBU4, TBU4B

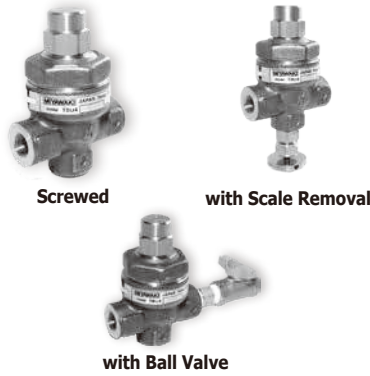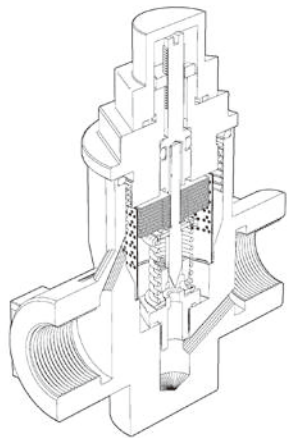

Available options TBU4

with a ball valve (TBU4B-C)
with scale removal (TBU4-SR)

Special version TBU4-10

Operating pressure range:
0,5 – 1 MPa (73 – 145 psig)

- * **Curve 1** shows the trap's maximum capacity when discharging cold condensate.
- ** **Curve 2** shows the trap's maximum capacity when discharging hot condensate at a temperature of 10°C (18°F) (TBU4) / 5°C (9°F) (TB1N) below the adjusted temperature of the trap.


Standard factory setting:

70°C at 0,5 MPa; 158°F at 73 psig


The dashed line

shows the standard factory setting.


Dimensions

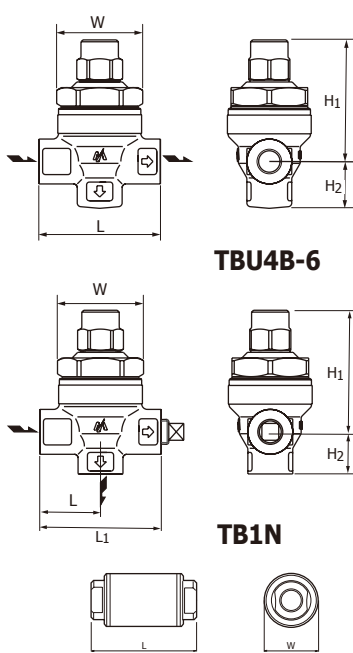


Capacity Chart TBU4/TBU4B-6

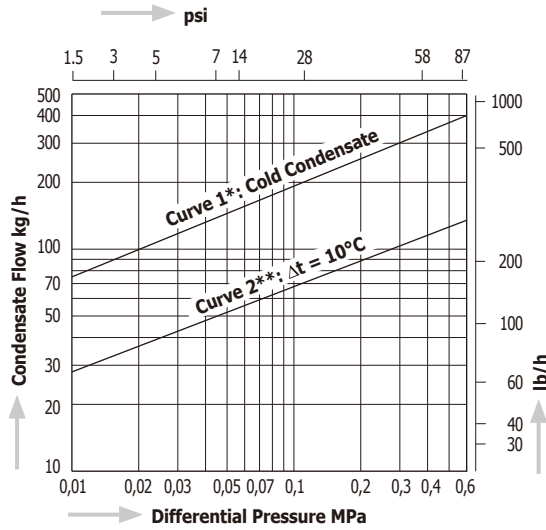


TB1N

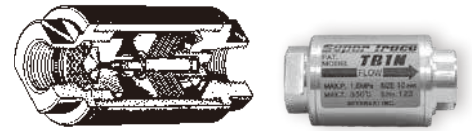


Capacity Chart TB1N

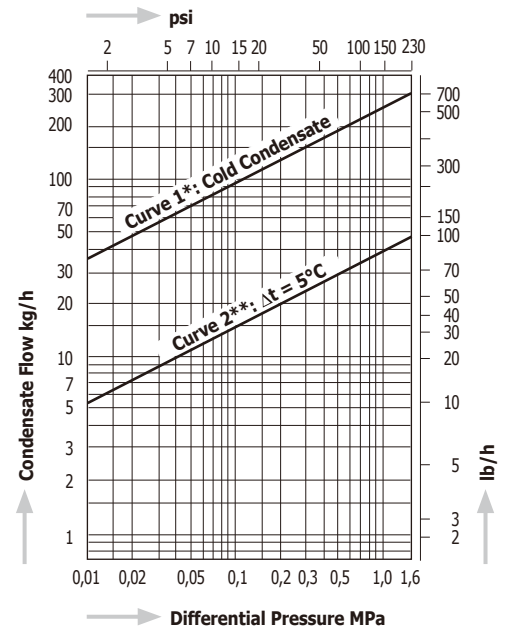

Temperature Stroke Chart TBU4/TBU4B-6

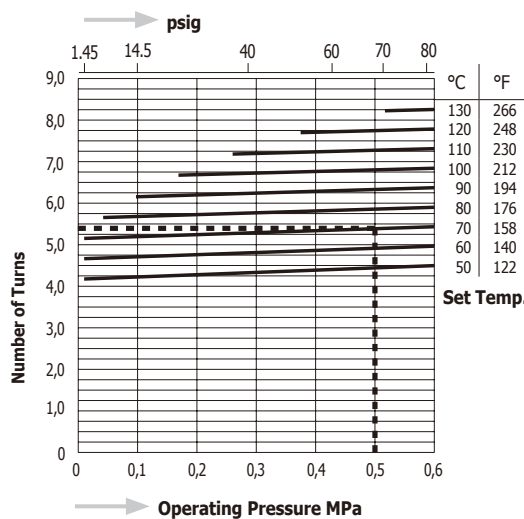


Temperature Stroke Chart TB1N

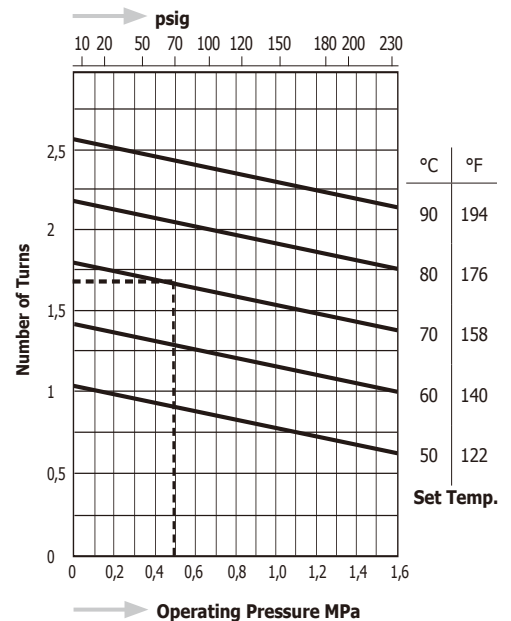

| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Adjustable Range | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | | | |
|---------|-----------------|--------|-------------------------|------|----------------------------|-----|------------------|-----------|-----------------|----------------|----------------|----------------|-----------------|-----|----------------|----------------|---------------|-------------------|-------------------------------------|------|------|
| | | | MPa | psig | °C | °F | °C | °F | L | L ₁ | H ₁ | H ₂ | W | L | L ₁ | H ₁ | | H ₂ | W | kg | lb |
| TBU4-6 | Screwed Rc, NPT | ¼", ⅜" | 0,6 | 87 | 220 | 428 | 50 – 130 | 122 – 266 | 65 | – | 65 | 25 | 46 | 2.6 | – | 2.6 | 1.0 | 1.8 | Stainless Steel SUS F304/ A182 F304 | 0,58 | 1.28 |
| TBU4B-6 | | | | | | | | | 32,5 | 65 | 22,5 | 46 | 1.3 | 2.6 | 0.9 | | | | | | |
| TB1N | Screwed Rc, NPT | ¼", ⅜" | 1,6 | 230 | 350 | 662 | 50 – 90 | 122 – 194 | 70 | – | – | 38 | 2.8 | – | – | 1.5 | – | Carbon Steel S25C | 0,35 | 0.77 | |

TB51, TB52

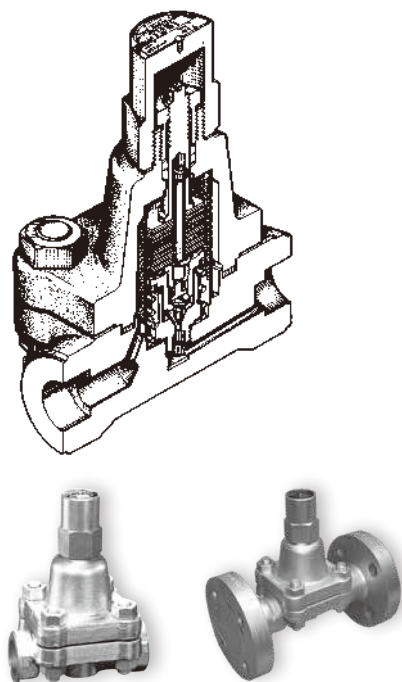

Screwed & Socket Weld

Flanged

Special face-to-face dimensions available.

* **Curve 1** shows the trap's maximum capacity when discharging cold condensate.

** **Curve 2** shows the trap's maximum capacity when discharging hot condensate at a temperature of 10°C (18°F) below the adjusted temperature of the trap.

Standard factory setting:

TB51-45, TB52-45:
180°C at 2,1 MPa; 356°F at 305 psig
TB51-65, TB52-65:
220°C at 4,4 MPa; 428°F at 638 psig


The dashed line

shows the standard factory setting.


Dimensions

TB51, TB52, TB51W, TB52W


TB51F, TB52F

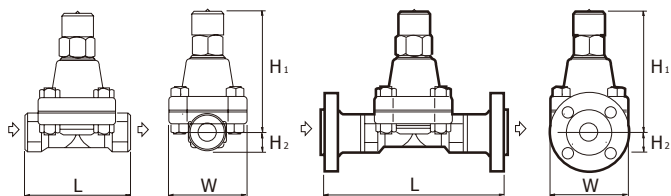


Capacity Chart TB51/52-45

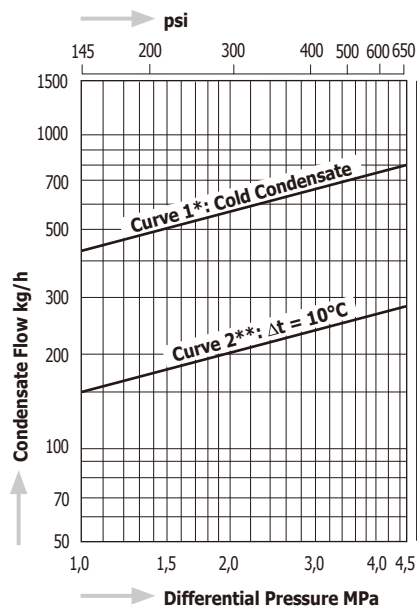

Temperature Stroke Chart TB51/52-45

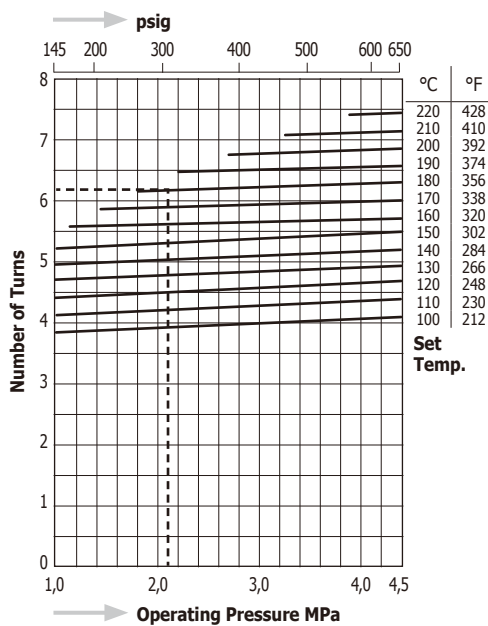

Capacity Chart TB51/52-65

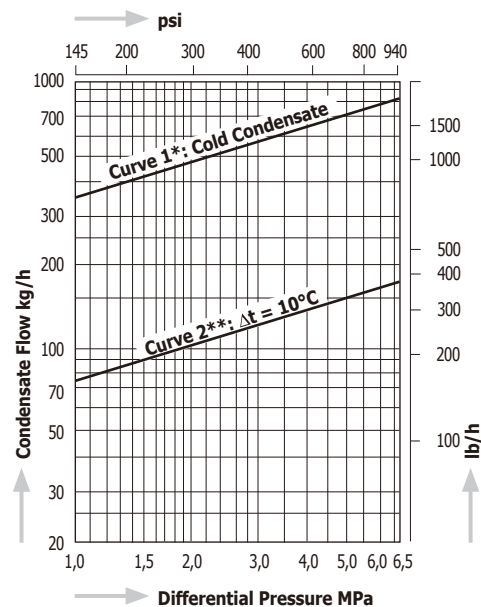

Temperature Stroke Chart TB51/52-65



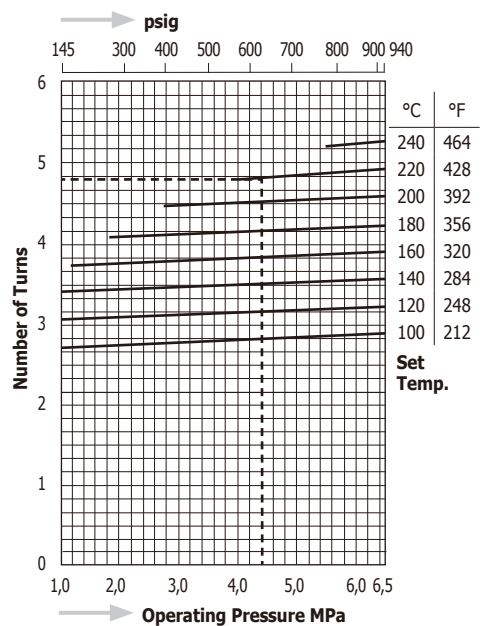


Table 1: Face-to-face dimensions / weights

| Model | Size (in) | ASME 600 lb | | | | DIN PN63 / PN100 | | | | JIS 63 K / ASME 900 lb | | | |
|----------------|-----------|-------------|-----|-----|------|------------------|-----|------|------|------------------------|-----|------|------|
| | | mm | in | kg | lb | mm | in | kg | lb | mm | in | kg | lb |
| TB51F TB52F | 1/2" | 200 | 7.9 | 7,3 | 16.1 | 210 | 8.3 | 9,4 | 20.7 | 220 | 8.7 | 9,6 | 21.2 |
| | 3/4" | 210 | 8.3 | 8,5 | 18.7 | 230 | 9.1 | 11,4 | 25.1 | 230 | 9.1 | 11,1 | 24.5 |
| | 1" | 240 | 9.4 | 9,6 | 21.2 | 230 | 9.1 | 12,5 | 27.6 | 240 | 9.4 | 12,1 | 26.7 |

| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Adjustable Range | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | | | |
|-----------------|-------------|-------------------------------|-------------------------|------|----------------------------|-------|------------------|-----------|-----------------|---------|-----|----|-----------------|---------|-----|-----|---------------|----------------------|-------------------|------|------|
| | | | MPa | psig | °C | °F | °C | °F | L | H1 | H2 | W | L | H1 | H2 | W | | kg | lb | | |
| TB51 (TB52) | 45 65 | Screwed Rc, NPT | 1/2" - 1" | 4,5 | 653 | 425 | 800 | 100 - 220 | 212 - 428 | 130 | 155 | 25 | 100 | 5.1 | 6.1 | 1.0 | 3.9 | Forged Steel A105 | 5,7 | 12,6 | |
| | | | | 6,5 | 943 | (475) | (887) | 100 - 240 | 212 - 464 | | | | | | | | | | 5,7 | 12,6 | |
| TB51 (TB52)W | 45 65 | Socket Weld JIS, ASME, DIN | 1/2" - 1" | 4,5 | 653 | 425 | 800 | 100 - 220 | 212 - 428 | 130 | 155 | 25 | 100 | 5.1 | 6.1 | 1.0 | 3.9 | | TB52: A182 F22 | 5,7 | 12,6 |
| | | | | 6,5 | 943 | (475) | (887) | 100 - 240 | 212 - 464 | | | | | | | | | | | 5,7 | 12,6 |
| TB51 (TB52)F | 45 65 | Flanged JIS, ASME, DIN | 1/2" - 1" | 4,5 | 653 | 425 | 800 | 100 - 220 | 212 - 428 | Table 1 | 155 | 25 | 100 | Table 1 | 6.1 | 1.0 | 3.9 | Table 1 | 5,7 | 12,6 | |
| | | | | 6,5 | 943 | (475) | (887) | 100 - 240 | 212 - 464 | | | | | | | | | | 5,7 | 12,6 | |

TBH71, TBH72 TBH81, TBH82

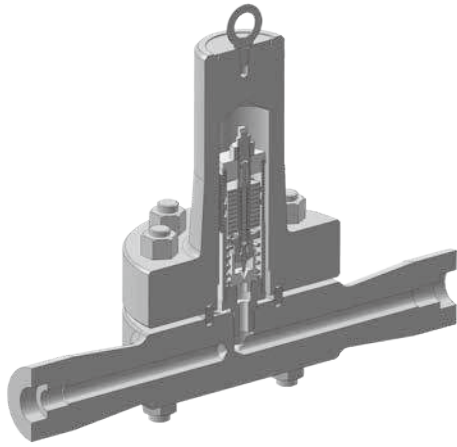


TBH72, TBH81, TBH82
Socket Weld




TBH71
Flanged

Dimensions


TBH71- ...W
Socket Weld

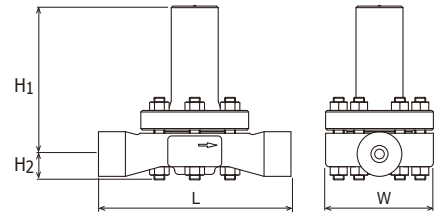


TBH71- ...F
Flanged

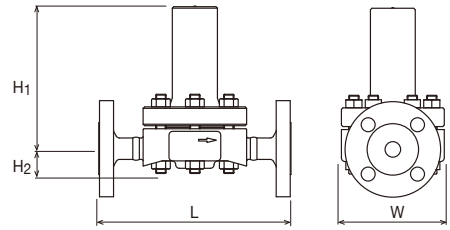

TBH72- ...W, TBH81- ...W, TBH82- ...W
Socket Weld

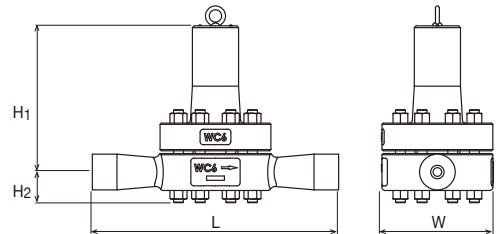

TBH72- ...F, TBH81- ...F, TBH82- ...F
Flanged

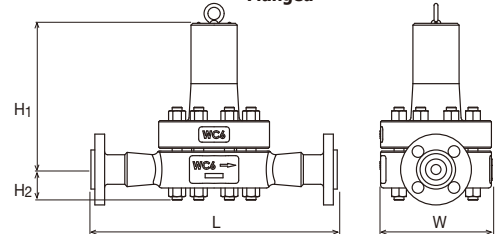

Standard factory settings

| Model | MPa | psig | Model | MPa | psig |
|------------------|--------------|--------------|------------------|--------------|--------------|
| TBH71-80 | 6,5 (210°C) | 942 (410°F) | TBH72-80 | 6,5 (210°C) | 942 (410°F) |
| TBH71-105 | 8,0 (230°C) | 1160 (446°F) | TBH72-105 | 8,0 (230°C) | 1160 (446°F) |
| TBH81-150 | 10,5 (250°C) | 1522 (482°F) | TBH82-150 | 10,5 (250°C) | 1522 (482°F) |
| TBH81-200 | 15,0 (270°C) | 2175 (518°F) | TBH82-200 | 15,0 (270°C) | 2175 (518°F) |

Pressure shell design conditions

| Model | PMA | | TMA | |
|------------------|--------------|---------------|--------------|------------------|
| | MPa | psig | °C | °F |
| TBH71-80 | 11,8 (425°C) | 1711 (800°F) | 593 (1,3MPa) | 1100 (188 psig) |
| TBH71-105 | | | | |
| TBH72-80 | 25,0 (492°C) | 3625 (918°F) | 593 (3,7MPa) | 1100 (536 psig) |
| TBH72-105 | | | | |
| TBH81-150 | 25,0 (492°C) | 3625 (918°F) | 593 (3,7MPa) | 1100 (536 psig) |
| TBH81-200 | | | | |
| TBH82-150 | 25,0 (520°C) | 3625 (968°F) | 593 (5,9MPa) | 1100 (856 psig) |
| TBH82-200 | 25,0 (538°C) | 3625 (1000°F) | 593 (7,3MPa) | 1100 (1059 psig) |

| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Adjustable Range | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|-------------------|----------------------------------|---------|-------------------------|------|----------------------------|-----|------------------|-----------|-----------------|-----|----|-----|-----------------|-----|-----|-----|-----------------------|--------|-------|
| | | | MPa | psig | °C | °F | °C | °F | L | H1 | H2 | W | L | H1 | H2 | W | | kg | lb |
| TBH71-80W | Socket Weld JIS, ASME, DIN | ½" – 1" | 8,0 | 1160 | 470 | 878 | 100 – 260 | 212 – 500 | 250 | 195 | 33 | 140 | 9.8 | 7.7 | 1.3 | 5.5 | Cast Steel A217WC6 | 13 | 28.6 |
| TBH71-105W | | | 10,5 | 1522 | | | 100 – 280 | 212 – 536 | | | | | | | | | | 13 | 28.6 |
| TBH81-150W | | | 15,0 | 2175 | | | 100 – 300 | 212 – 572 | | | | | | | | | | 29 | 63.8 |
| TBH81-200W | | | 20,0 | 2900 | | | 100 – 320 | 212 – 608 | | | | | | | | | | 29 | 63.8 |
| TBH71-80F | Flanged JIS, ASME, DIN | ½" – 1" | 8,0 | 1160 | 470 | 878 | 100 – 260 | 212 – 500 | 260 | 195 | 33 | 140 | 10.2 | 7.7 | 1.3 | 5.5 | Cast Steel A217WC6 | 19* | 41.8* |
| TBH71-105F | | | 10,5 | 1522 | | | 100 – 280 | 212 – 536 | | | | | | | | | | 19* | 41.8* |
| TBH81-150F | | | 15,0 | 2175 | | | 100 – 300 | 212 – 572 | | | | | | | | | | 38* | 83.6* |
| TBH81-200F | | | 20,0 | 2900 | | | 100 – 320 | 212 – 608 | | | | | | | | | | 38* | 83.6* |

| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Adjustable Range | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|-------------------|----------------------------------|---------|-------------------------|------|----------------------------|------|------------------|-----------|-----------------|-----|----|-----|-----------------|------|-----|-----|---------------|--------|--------|
| | | | MPa | psig | °C | °F | °C | °F | L | H1 | H2 | W | L | H1 | H2 | W | | kg | lb |
| TBH72-80W | Socket Weld JIS, ASME, DIN | ½" – 1" | 8,0 | 1160 | 550 | 1022 | 100 – 260 | 212 – 500 | 400 | 268 | 50 | 180 | 15.8 | 10.6 | 2.0 | 7.1 | A217WC6 | 29 | 63.8 |
| TBH72-105W | | | 10,5 | 1522 | | | 100 – 280 | 212 – 536 | | | | | | | | | | 29 | 63.8 |
| TBH82-150W | | | 15,0 | 2175 | | | 100 – 300 | 212 – 572 | | | | | | | | | | 37 | 81.4 |
| TBH82-200W | | | 20,0 | 2900 | | | 100 – 320 | 212 – 608 | | | | | | | | | | 68 | 149.6 |
| TBH72-80F | Flanged JIS, ASME, DIN | ½" – 1" | 8,0 | 1160 | 550 | 1022 | 100 – 260 | 212 – 500 | 400 | 268 | 50 | 180 | 15.8 | 10.6 | 2.0 | 7.1 | A217WC6 | 35* | 77.0* |
| TBH72-105F | | | 10,5 | 1522 | | | 100 – 280 | 212 – 536 | | | | | | | | | | 38* | 83.6* |
| TBH82-150F | | | 15,0 | 2175 | | | 100 – 300 | 212 – 572 | | | | | | | | | | 46* | 101.2* |
| TBH82-200F | | | 20,0 | 2900 | | | 100 – 320 | 212 – 608 | | | | | | | | | | 76* | 167.2* |

* The weight refers to 1" flanged type. Depending on the size and flange standard the weights may differ.

Forged Steel (A182F91) as body material for TBH72 and TBH82 is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.

Bimetal Temperature Control Traps – High Pressure **SERIES TB**

Capacity Charts





Temperature Stroke Charts

TBH71 - 80

TBH72 - 80

TBH71 - 80

TBH72 - 80

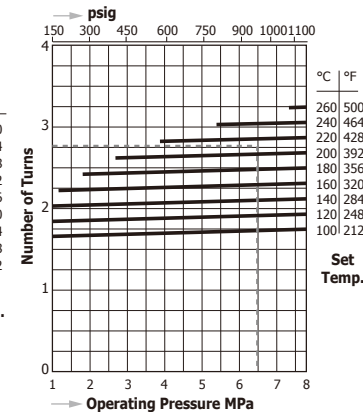
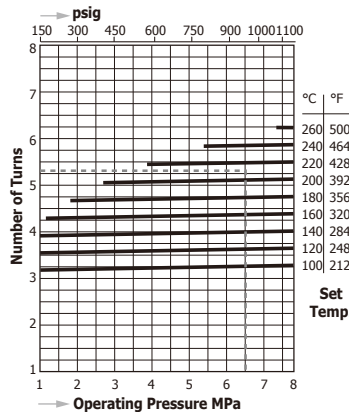
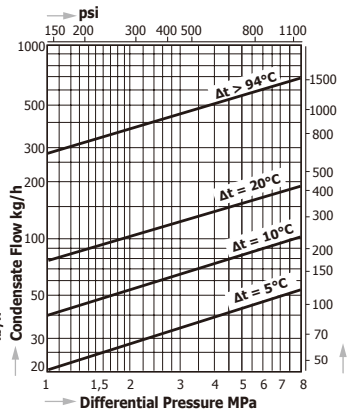
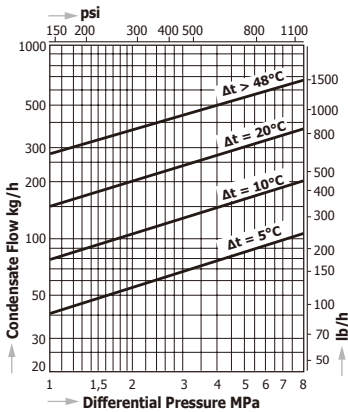


TBH71 - 105

TBH72 - 105

TBH71 - 105

TBH72 - 105

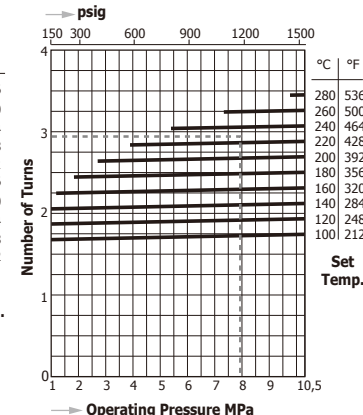
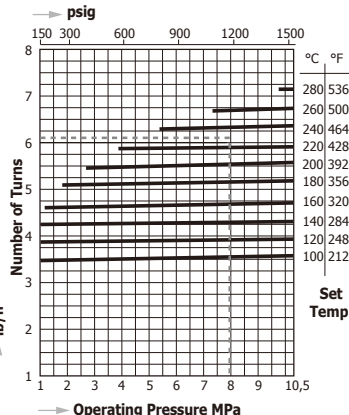
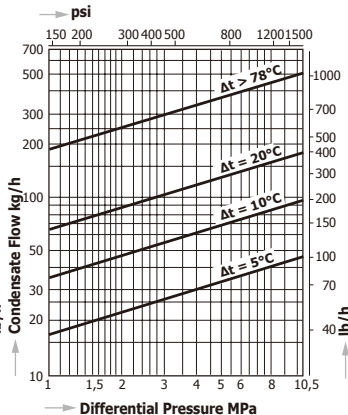
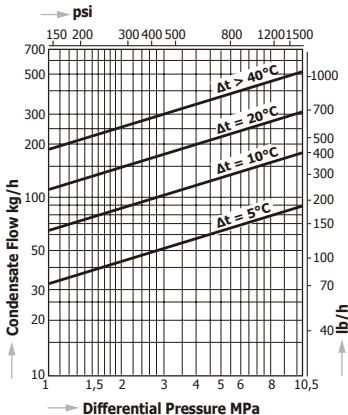


TBH81 - 150

TBH82 - 150

TBH81 - 150

TBH82 - 150

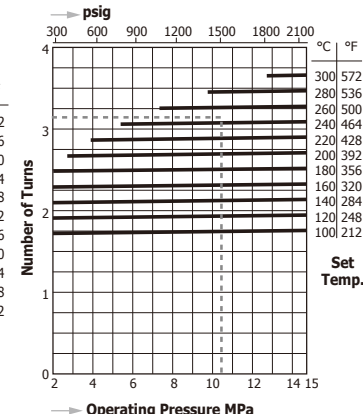
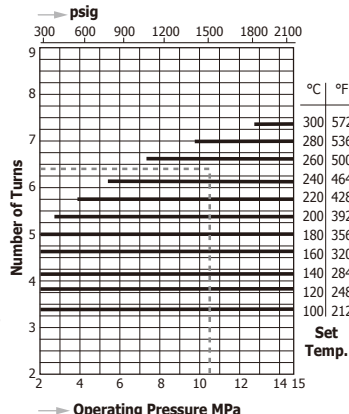
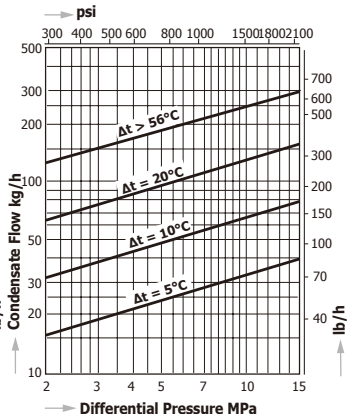
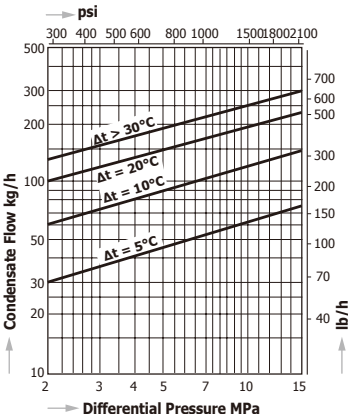


TBH81 - 200

TBH82 - 200


TBH81 - 200

TBH82 - 200

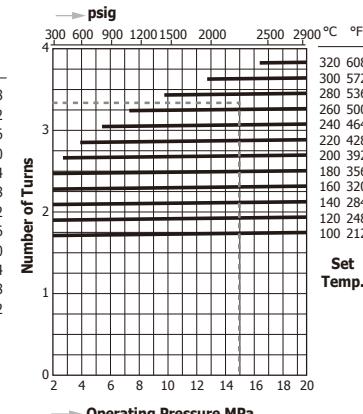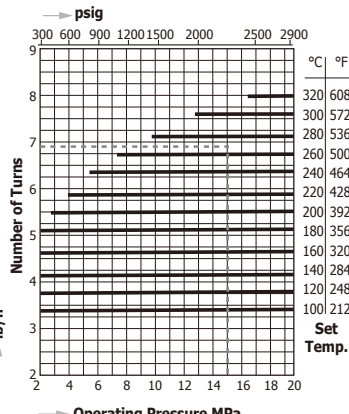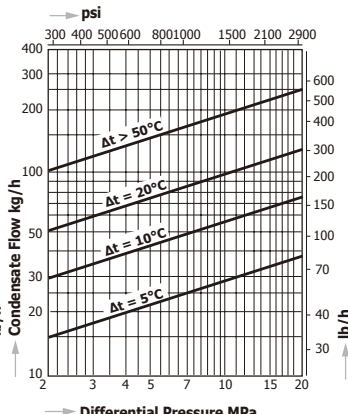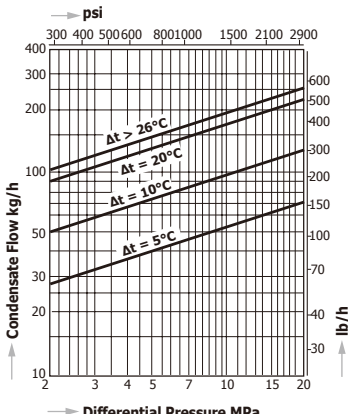


The dashed line shows the standard factory setting.


TB7N

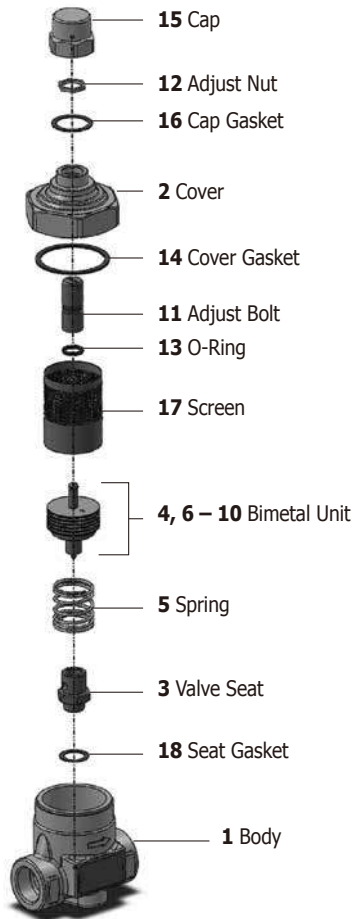


TB9N

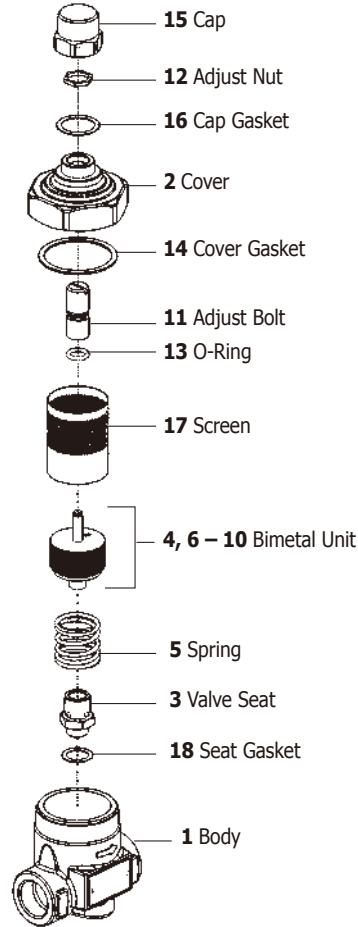


TBU4, TBU4B

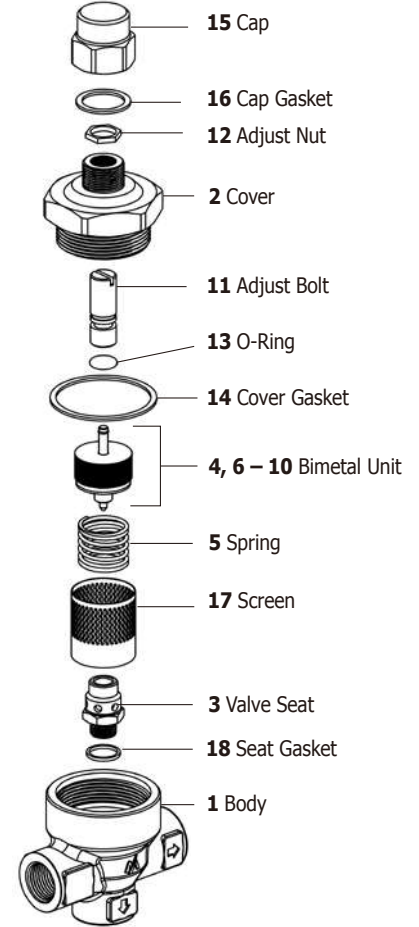


TB1N

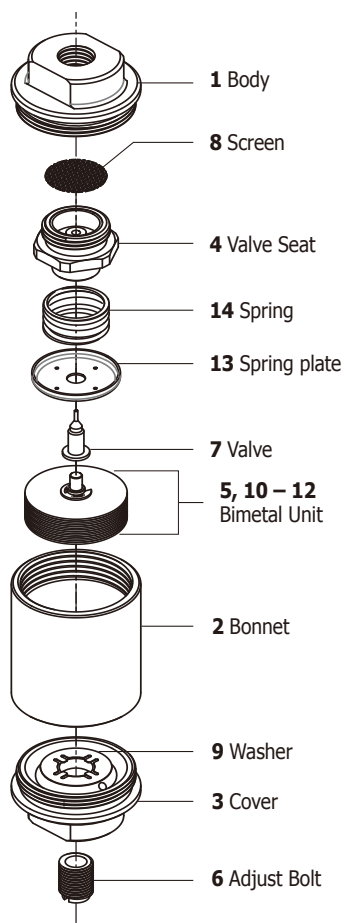

TB51, TB52

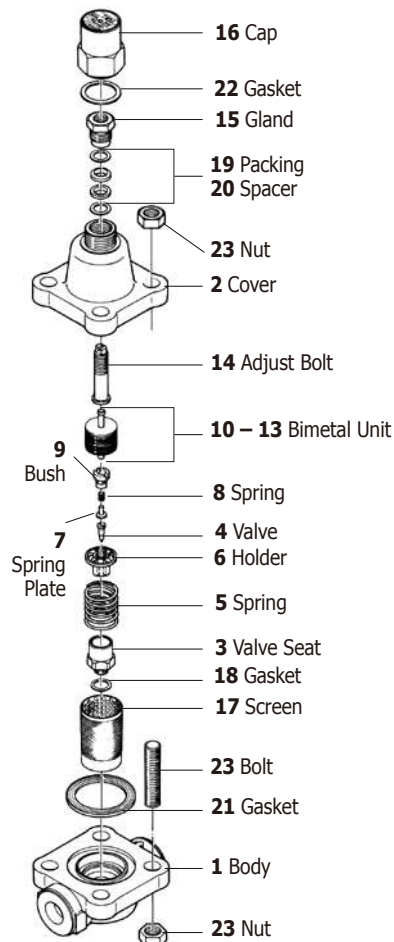

TBH71, TBH72, TBH81, TBH82

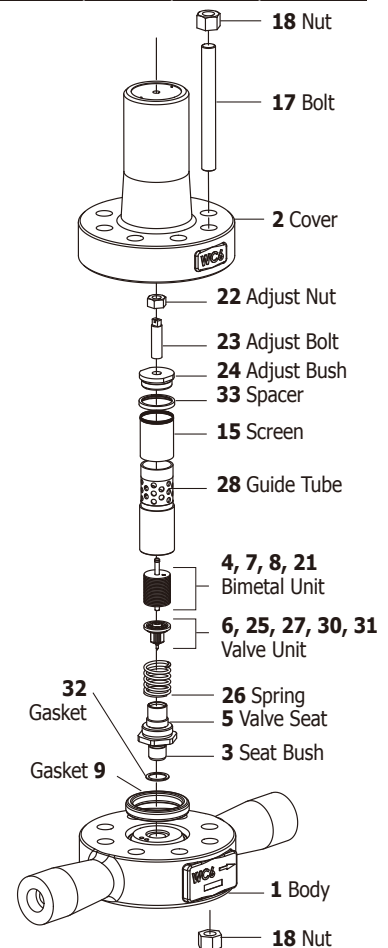

Thermostatic Radiator Traps

SERIES W

Thermostatic Radiator Traps are equipped with a Thermo-Element, which controls the discharge of condensate depending on the temperature. The Thermo-Element expands with the temperature, so below a certain temperature (depending on type) the trap is open and above that temperature it is closed.

Models

W1, W2, W3

With Forged brass body and stainless steel internals

Features



- Quick startup
- Operates below saturation temperature, resulting in no steam leaks and great energy saving performance.
- Dirt and scale are effectively discharged thanks to a generously designed valve hole and large flow surface area in the valve.
- The valve remains fully open once the operation stops and discharges condensate completely.
- Easy maintenance


Suitable for

Radiators


(Perfect for the radiator heating system in the hotel, school, hospital, and office sectors)

Operating Principle


 cold condensate  hot condensate



On start-up, the valve shaft is up with the valve fully open. Virtually all cold condensate and air are discharged.




As the temperature of the condensate increases, the Thermo-Element begins to expand and forces the valve to move down. When the condensate temperature is above opening temperature of the valve (depending on type), the valve will close the seat completely.



As the temperature of the condensate decreases, the Thermo-Element shrinks and the valve will open. Condensate will be discharged continuously at a stable temperature.

W

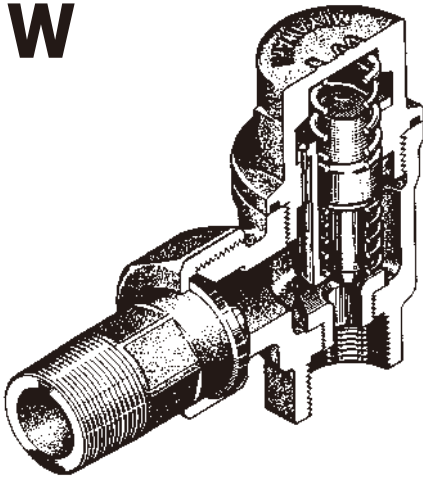


W1




W2

W1, W2, W3

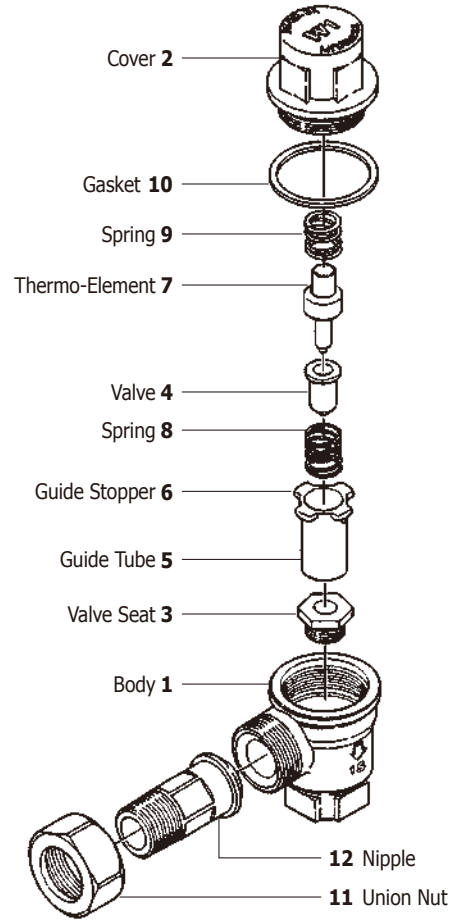


Capacity Chart W1, W2, W3

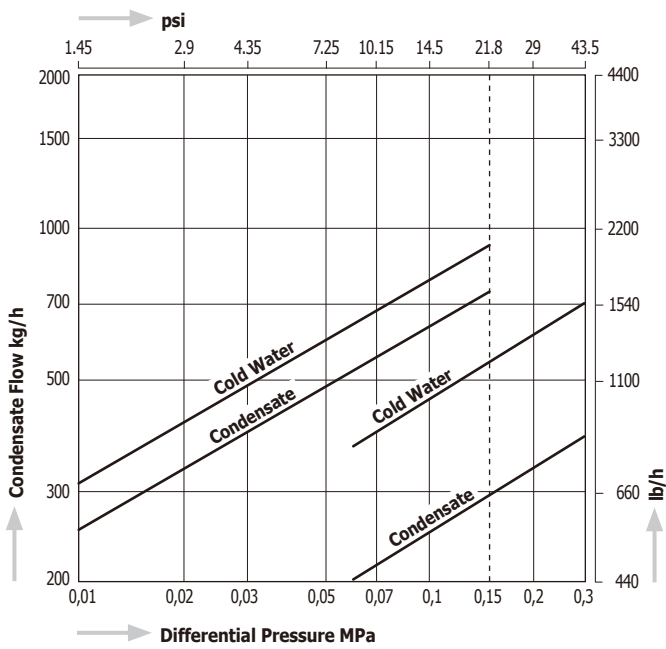

The opening temperature of the valve is preset

- at about 97°C (207° F) for W1-1,5, W2-1,5 and W3-1,5
- at about 115°C (239° F) for W1-3, W2-3 and W3-3

Dimensions

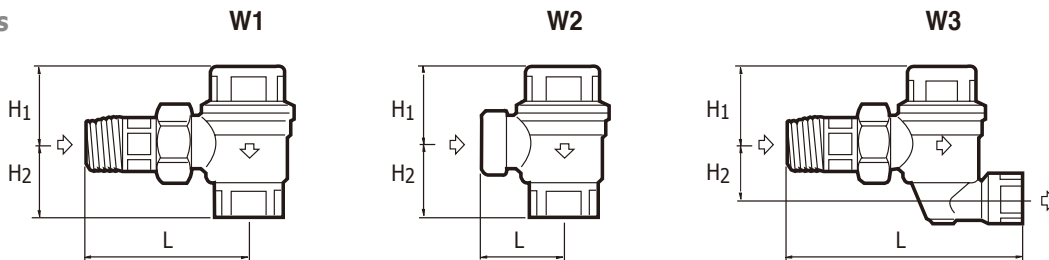

| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | Dimensions (in) | | | Body Material | Weight | | | | |
|---------------|--|------|-------------------------|------|----------------------------|-----|-----------------|----------------|----------------|-----------------|----------------|----------------|---------------|--------|-----|-------------|-----|-----|
| | | | MPa | psig | °C | °F | L | H ₁ | H ₂ | L | H ₁ | H ₂ | | kg | lb | | | |
| W1-1,5 | Screwed Inlet : R Outlet : Rc, NPT | 1/2" | 0,15 | 21.8 | 150 | 302 | 80 | 35 | 3.1 | 1.4 | Brass C3771 | 0,5 | 1.1 | | | | | |
| | | 3/4" | | | | | | | | | | 0,6 | 1.3 | | | | | |
| W1-3 | Screwed Inlet : R Outlet : Rc, NPT | 1/2" | 0,3 | 43.5 | | | | | | | | 80 | 35 | 3.1 | 1.4 | Brass C3771 | 0,5 | 1.1 |
| | | 3/4" | | | | | | | | | | | | | | | 0,6 | 1.3 |
| W2-1,5 | Screwed Rc, NPT | 1/2" | 0,15 | 21.8 | 150 | 302 | 35 | 42 | 1.4 | 1.7 | Brass C3771 | 0,4 | 0.9 | | | | | |
| | | 3/4" | | | | | | | | | | 0,5 | 1.1 | | | | | |
| W2-3 | Screwed Rc, NPT | 1/2" | 0,3 | 43.5 | | | | | | | | 35 | 41 | 1.4 | 1.6 | Brass C3771 | 0,4 | 0.9 |
| | | 3/4" | | | | | | | | | | | | | | | 0,5 | 1.1 |
| W3-1,5 | Screwed Inlet : R Outlet : Rc, NPT | 1/2" | 0,15 | 21.8 | 150 | 302 | 123 | 28 | 4.8 | 1.1 | Brass C3771 | 0,6 | 1.3 | | | | | |
| | | 3/4" | | | | | | | | | | 0,7 | 1.5 | | | | | |
| W3-3 | Screwed Inlet : R Outlet : Rc, NPT | 1/2" | 0,3 | 43.5 | | | | | | | | 123 | 28 | 4.8 | 1.1 | Brass C3771 | 0,6 | 1.3 |
| | | 3/4" | | | | | | | | | | | | | | | 0,7 | 1.5 |

Balanced Pressure Thermostatic Steam Traps

SERIES D

Balanced Pressure Thermostatic Steam Traps are equipped with a capsule element, which controls the discharge of condensate depending on the temperature. The capsule contains a special liquid, whose saturation temperature at a given pressure is always lower than that of the water. It ensures a very accurate functioning of the steam trap and is self-adjusting.

The discharge characteristic follows the saturation curve independent from pressure changes and the condensate load. Series D MIYAWAKI steam traps can be delivered with 3 different capsule types:

Types H & C discharge hot condensate at approximately 5°C (9°F) below saturation temperature
Type L discharges hot condensate at approximately 15°C (27°F) below saturation temperature

Models **DC1, DC2, DV1, DL1, DX1** with stainless steel body and internals
DF1 with forged steel body and stainless steel internals


- Features**
- Excellent air venting characteristics at start-up and during operation
 - The operation will not be influenced by back pressure
 - At time of non-operation self-draining
 - No steam loss throughout its operating range
 - All traps equipped with integral strainers
 - Can be installed both horizontally and vertically
 - Easy in-line inspection and maintenance
 - Lightweight, compact design

Suitable for

light to medium condensate loads: steam tracing, steam main drips, small heat exchangers, unit heaters, steam heating coils and many other applications in the petrochemical, chemical, textile, food, pharmaceutical and other industries.

Operating principle

■ cold condensate ■ hot condensate ■ steam

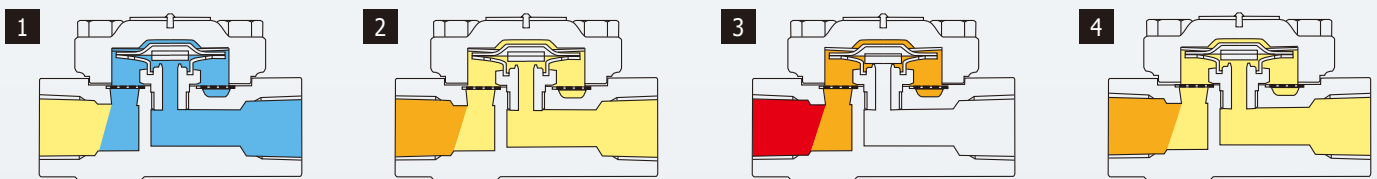

Upon start-up in the presence of cold condensate, the capsule element is contracted and the valve plate has moved away from the seat. The wide open valve discharges condensate and air rapidly.

As the temperature inside the trap increases, the capsule element will start to expand, moving the valve plate toward the seat.


Just before the condensate reaches saturation temperature, the valve plate will close the seat completely. Steam can not enter the trap, ensuring zero steam loss.

As the temperature inside the trap decreases, the capsule element moves away from the seat and the condensate will be discharged. During normal operation steps 3 and 4 will repeat continuously.


Operating principle of DV1 when using the bypass valve

When the handle is turned in the direction indicated by the BLOW arrow on the nameplate (counterclockwise), the bypass valve will open, a bypass circuit will be formed inside the trap, and a large volume of air and condensate can be discharged quickly. Scale that has accumulated in the screen can also be blown out.


When the bypass valve is closed, the type DV1 will operate as a normal steam trap (see above operating principle).

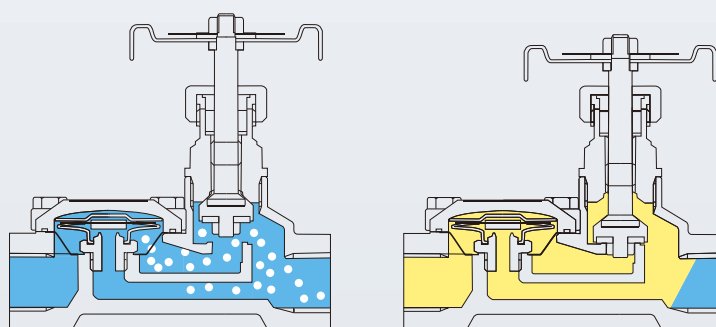


DC1

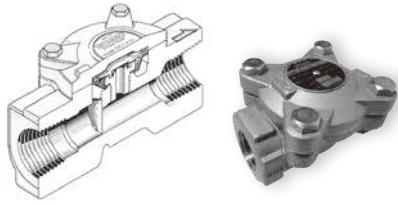


Capacity Chart DC1

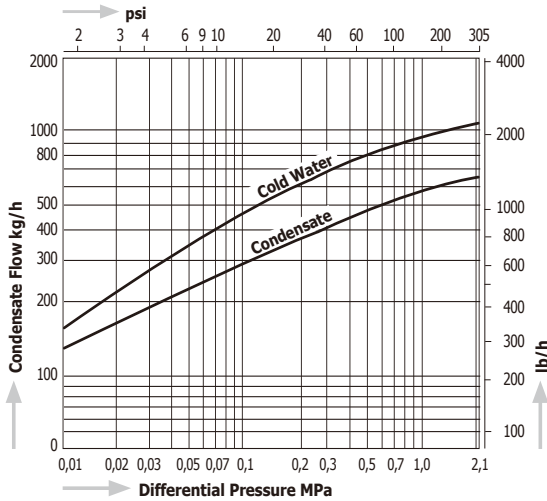


DC2

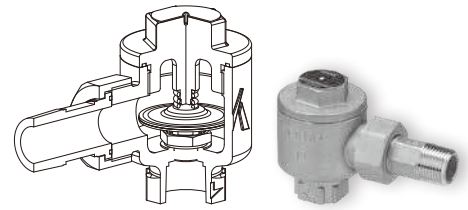


Capacity Chart DC2

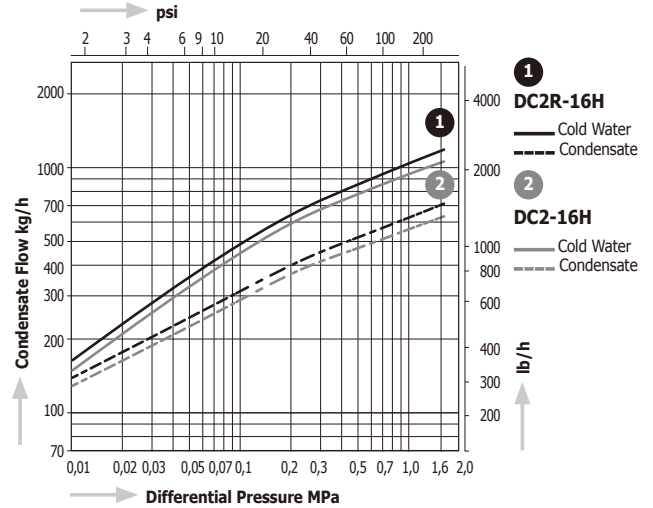


DV1 with Bypass Valve

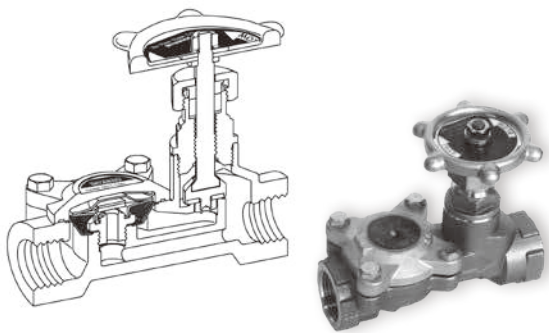

Capacity Chart DV1

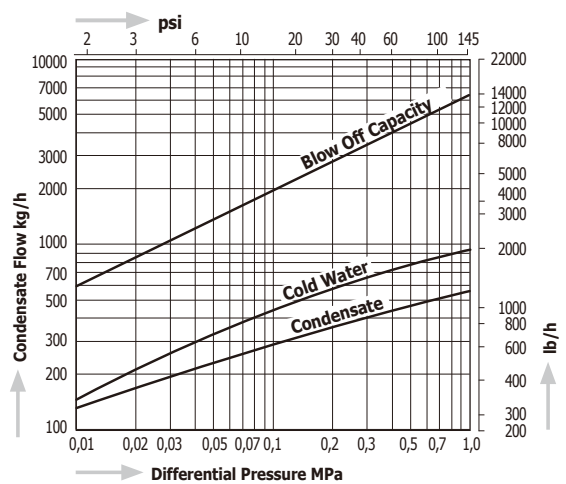


Dimensions

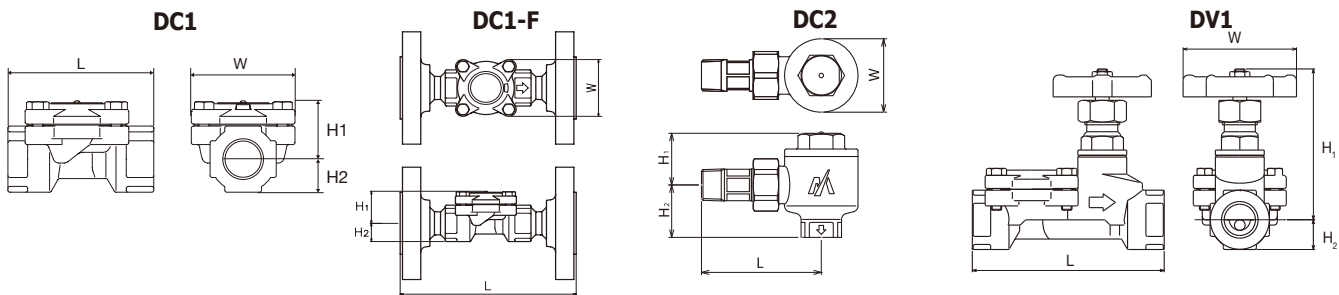

| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|----------------------|-----------------------------|------------|-------------------------|------------|----------------------------|-----|-----------------|----------------|----------------|-----|-----------------|----------------|----------------|-----|-------------------------------|--------|-----|
| | | | MPa | psig | °C | °F | L | H ₁ | H ₂ | W | L | H ₁ | H ₂ | W | | kg | lb |
| DC1-21H DC1-21L | Screwed Rc, NPT | 1/4", 3/8" | 2,1 | 305 | 220 | 428 | 65 | 29 | 11 | 53 | 2.6 | 1.1 | 0.4 | 2.1 | Stainless Steel SCS13A/CF8 | 0,4 | 0,9 |
| | | 1/2", 3/4" | | | | | 75 | 31 | 17 | | 3.0 | 1.2 | 0.7 | | | 0,5 | 1.1 |
| | | 1" | | | | | 80 | 34 | 21 | | 3.1 | 1.3 | 0.8 | | | 0,5 | 1.1 |
| DC1-21HF DC1-21LF | Flanged JIS, ASME, DIN | 1/2" | 2,1 | 305 | 220 | 428 | 150 | 31 | 17 | 53 | 5.9 | 1.2 | 0.7 | 2.1 | | 1,3 | 2,9 |
| | | 3/4" | | | | | 160 | 34 | 21 | | 6.3 | 1.3 | 0.8 | | | 2,2 | 4,9 |
| | | 1" | | | | | 160 | 34 | 21 | | 6.3 | 1.3 | 0.8 | | | 3,1 | 6,8 |
| DC2R-16H DC2-16H | Inlet: R Outlet: Rc, NPT | 1/2" | 1,6 | 230 | 220 | 428 | 80 | 35 | 35 | 49 | 3.1 | 1.4 | 1.4 | 1.9 | 0,7 | 1,5 | |
| | | DV1-10 | Screwed Rc, NPT | 1/2", 3/4" | 1,0 | 145 | 185 | 365 | 110 | 88 | 17 | 65 | 4.3 | 3.5 | 0.7 | 2.6 | 0,9 |
| 1" | 116 | 94 | | 20.5 | | | | | 4.6 | 3.7 | 0.8 | | | | | | |

DC2R-16H – Type with bypass orifice to prevent residue of condensate in steam traps.


DL1





DX1



DF1




Dimensions




DF1


Screwed



Socket Weld




Flanged




Special face-to-face dimensions available.

Capacity Chart DL1, DF1

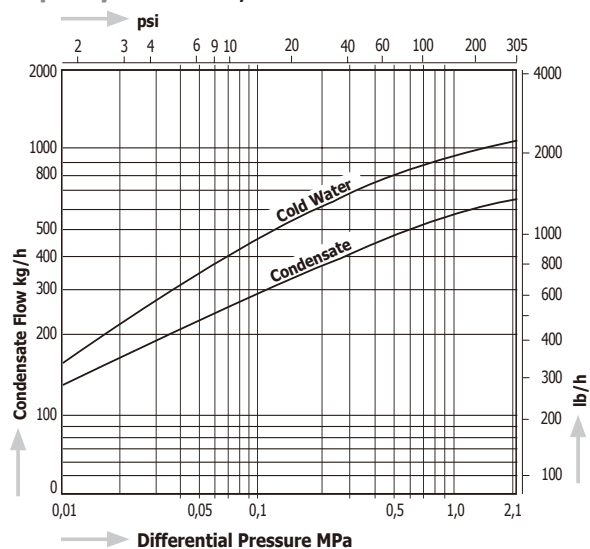


Capacity Chart DX1

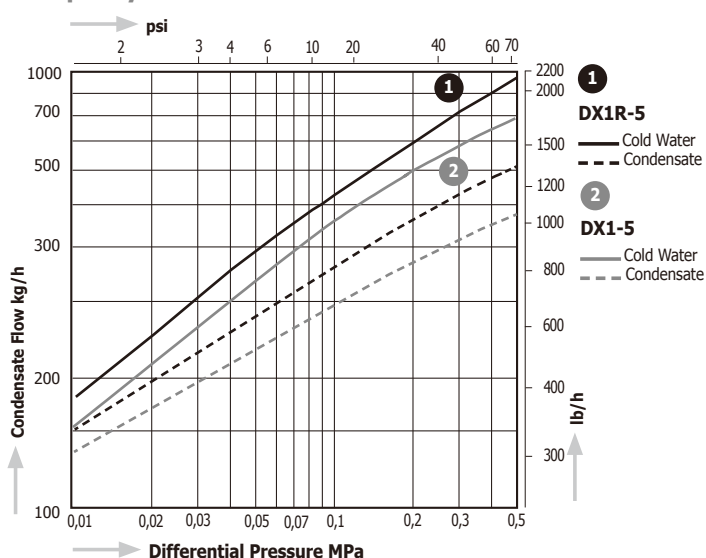


| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|----------------------|----------------------------------|-------|-------------------------|------|----------------------------|-----|-----------------|-----|-----|-----|-----------------|-----|-----|-----|------------------------------|--------|-----|
| | | | MPa | psig | °C | °F | L | H1 | H2 | W | L | H1 | H2 | W | | kg | lb |
| DL1-21H DL1-21L | Screwed Rc, NPT | 1/4" | 2,1 | 305 | 220 | 428 | 60 | - | - | 48 | 2.4 | - | - | 1.9 | Stainless Steel SCS13/CF8 | 0,7 | 1.5 |
| | | 3/8" | | | | | | | | | | | | | | | |
| | | 1/2" | | | | | | | | | | | | | | | |
| | | 3/4" | | | | | | | | | | | | | | | |
| DL1-10C | Screwed Rc, NPT | 1/4" | 1,0 | 145 | 220 | 428 | 60 | - | - | 48 | 2.4 | - | - | 1.9 | Stainless Steel SCS13/CF8 | 0,7 | 1.5 |
| | | 3/8" | | | | | | | | | | | | | | | |
| | | 1/2" | | | | | | | | | | | | | | | |
| | | 3/4" | | | | | | | | | | | | | | | |
| DX1-5 DX1R-5 | Tri-Clamp | 38 mm | 0,5 | 72.5 | 160 | 320 | 30 | - | - | 51 | 1.2 | - | - | 2.0 | Stainless Steel SUS316 | 0,18 | 0.4 |
| | | 1/2" | 2,1 | 305 | 235 | 455 | 85 | 36 | 18 | 62 | 3.4 | 1.4 | 0.7 | 2.4 | Forged Steel A105 | 1,0 | 2.2 |
| 3/4" | 100 | 40 | | | | | 23 | 3.9 | 1.6 | | 0.9 | 1,3 | 2.9 | | | | |
| 1" | 160 | 36 | | | | | 18 | 62 | 6.3 | 1.4 | 0.7 | 2.4 | 1,4 | 3.1 | | | |
| 3/4" | Flanged JIS, ASME 150, 300 lb | 175 | | | | | 36 | 18 | 62 | 6.9 | 1.4 | 0.7 | 2.4 | 2,1 | | 4.6 | |
| 1" | | 195 | 40 | 23 | 7.7 | 1.6 | 0.9 | 3,3 | | 7.3 | | | | | | | |
| 1" | | 215 | 40 | 23 | 8.5 | 1.6 | 0.9 | 4,0 | | 8.8 | | | | | | | |
| DF1-21HF DF1-21LF | Flanged DIN PN40 | DN15 | 2,1 | 305 | 235 | 455 | 150 | 36 | 18 | 62 | 5.9 | 1.4 | 0.7 | 2.4 | Forged Steel A105 | 2,3 | 5.0 |
| | | 150 | | | | | 36 | 18 | 62 | 6.3 | 1.4 | 0.7 | 2.4 | 3,6 | 7.9 | | |
| | | 160 | | | | | 36 | 18 | 62 | 6.3 | 1.4 | 0.7 | 2.4 | 4,3 | 9.5 | | |
| | | 160 | | | | | 36 | 18 | 62 | 6.3 | 1.4 | 0.7 | 2.4 | 4,3 | 9.5 | | |

DX1R-5 – Type with bypass orifice to prevent residue of condensate in steam traps.


DV1

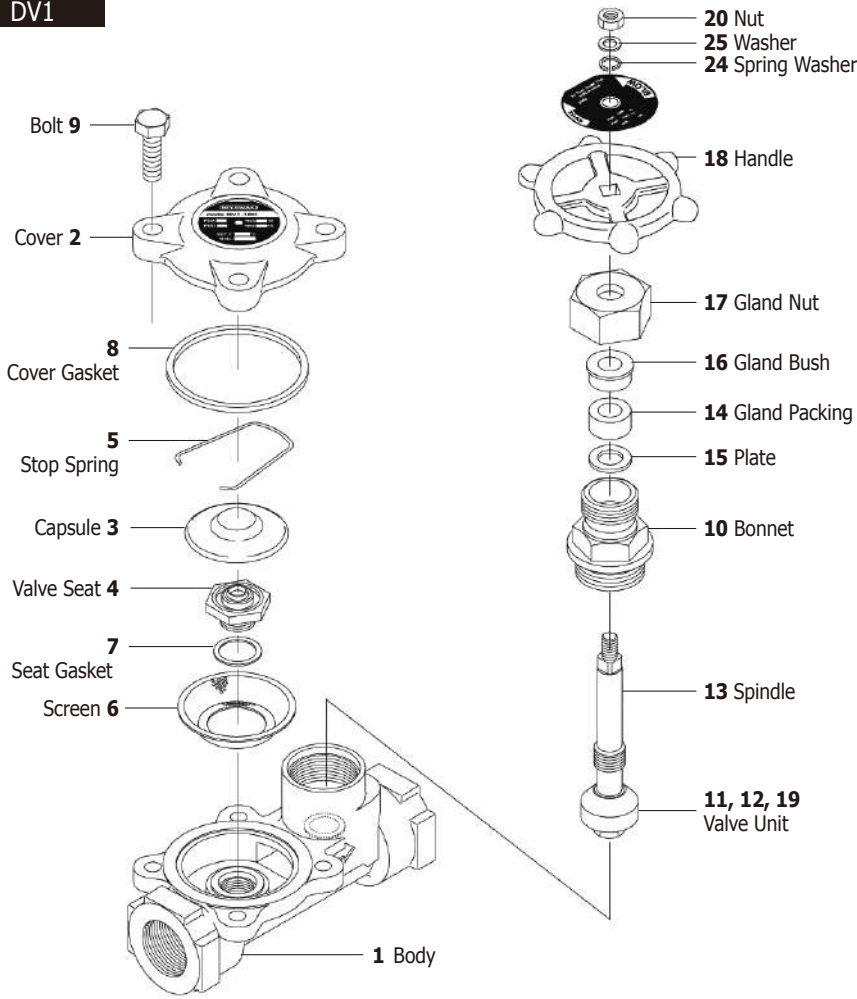


DC2

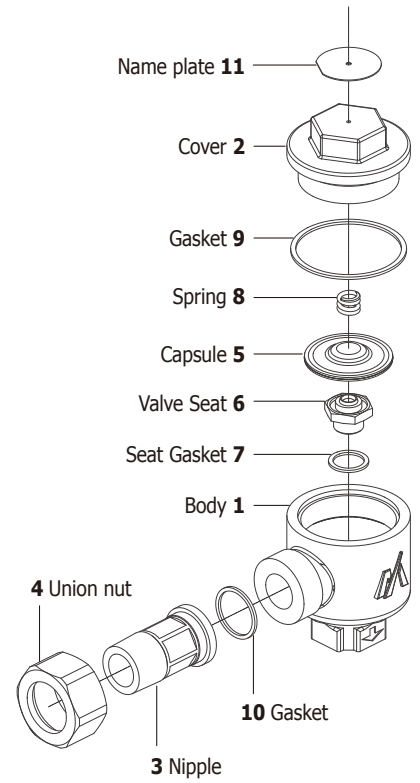


DC1

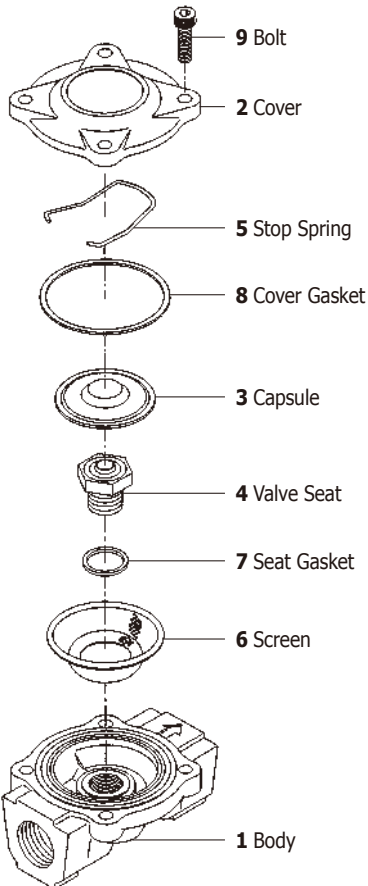

DL1

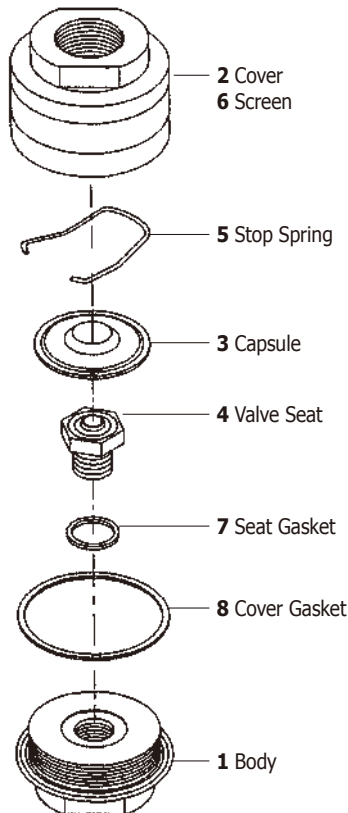

DF1

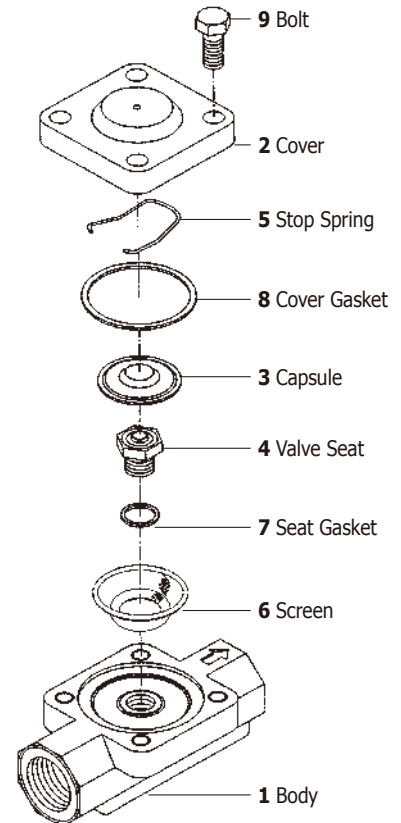

Thermodynamic Disc Traps

SERIES S

Thermodynamic steam traps operate on the basis of the Bernoulli principle, depending on the relationship between the velocity and the pressure exerted by the condensate and steam inside the steam trap.

They have only one moving part – the disc.

Due to their compact design and cost effectiveness thermodynamic steam traps are widely used in applications where the condensate must be removed immediately from steam lines and steam equipment. They discharge the condensate near the saturation temperature. The traps may operate up to a back pressure of 80% of the inlet pressure, but for smooth operation it is recommended that the back pressure does not exceed 50% of the inlet pressure. Thermodynamic steam traps discharge the condensate intermittently.

All steam traps are equipped with a hardened stainless steel disc and seat. After the lapping process all disc surfaces are controlled individually before releasing them for use in steam traps. These features and very high and severe quality standards for the whole production process give MIYAWAKI's thermodynamic steam traps a long and reliable service life.

Models S31N

Ductile Cast Iron Steam Traps with replaceable internals

SC31

Stainless steel steam traps with replaceable internals

SC, SF

Cast Iron Steam Traps for high capacity

SV

Steam Traps with inbuilt bypass

SL3

Compact, very small trap for low capacity applications

SU2N, SU2H, SD1

Stainless steel steam traps for low to high pressure applications

S55N, S55H, S61N, S62N

Forged steel steam traps for high pressure applications

Features


- Immediate discharge of condensate
- Insensitive to waterhammer, superheated steam and freezing
- Most types contain a bimetal ring which improves the ability of the trap to discharge air and cold condensate quickly at start-up and prevents air locking during times of operation
- Can be installed in vertical or horizontal position
- In case of danger of air locking special discs available
- All traps equipped with additional cover for reduced frequency of cycling and energy savings
- All traps with inbuilt strainers (except SL3)
- Easy maintenance

Suitable for

light to medium condensate loads: steam tracing, steam main drips, small heat exchangers, unit heaters, sterilizers and many other applications in the petrochemical, chemical, textile, food, pharma-ceutical and further industries. Series SV Thermodynamic steam traps with inbuilt bypass are designed for special applications in the food, pharmaceutical or other industries or for laundry applications where costs and space must be saved.

Operating principle

■ cold condensate ■ hot condensate ■ steam

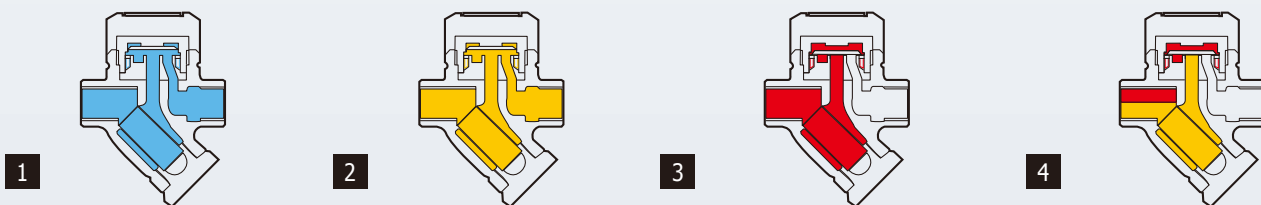


1 At the time of start-up the pressure of the incoming cold condensate and air raise the disc and water and air are discharged quickly.

2 When hot condensate flows into the trap, the trap is still open and the hot condensate can be discharged quickly.

3 After hot condensate flows into the trap, steam enters it. As the velocity of the fluid increases, the pressure under the seat exerted by the steam decreases. At the same time the pressure in the pressure chamber above the disc increases. The disc is pressed down and closes.


4 While hot condensate flows into the trap, the trap remains closed for a certain period, as far as the steam inside the pressure chamber does not condense. The more condensate flows into the trap, the more the temperature cools down. The steam inside the pressure chamber also cools down and condenses. As a result, the pressure of the incoming condensate raises the disc and condensate is discharged. Cycles 2, 3 and 4 repeat.

S31N, SC31

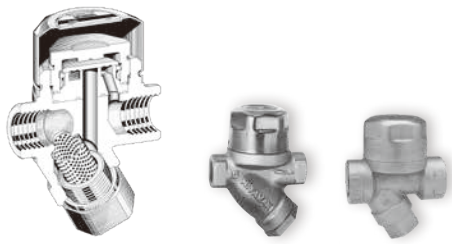


Capacity Chart

SC31 & SC31F/S31N & S31NF 1/2" – 1"

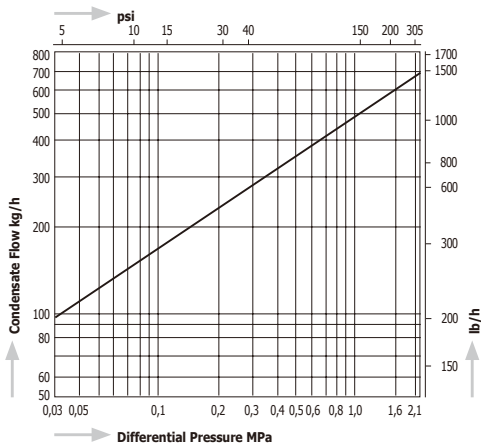


SC, SF



Capacity Chart

S31N & S31NF 1 1/4" – 2"; SC-310, SC-311 & SF-340, SF-341

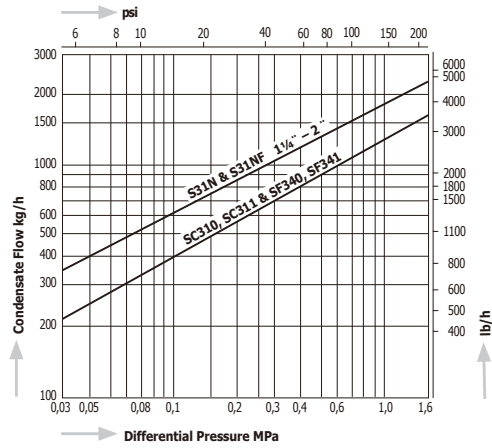

Dimensions


S31N/SC31 1/2" – 1"

S31NF 1/2" – 1"

SC31F 1/2" – 1"

S31N 1 1/4" – 2"
SC-310, SC-311


S31NF 1 1/4" – 2"
SF-340, SF-341

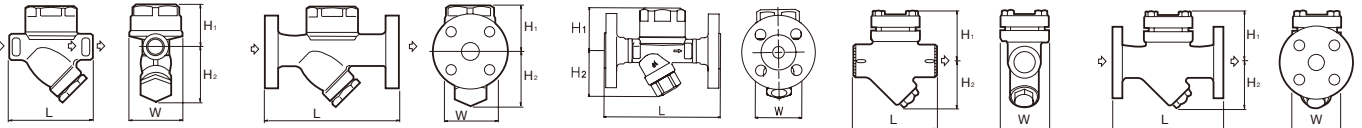


| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | | | | | | | | | | |
|----------|---------------------------|--------|-------------------------|------|----------------------------|-----|-----------------|----------------|----------------|----|-----------------|----------------|----------------|-----|--------------------------------|------------|-----|-----|--------------------------------|---|--------------|------------|--|--|-----|----|
| | | | MPa | psig | °C | °F | L | H ₁ | H ₂ | W | L | H ₁ | H ₂ | W | | kg | lb | | | | | | | | | |
| SC31 | Screwed Rc, Rp, NPT | 1/2" | 2,1 | 305 | 220 | 428 | 78 | 55 | | | 3.1 | 2.2 | | | Stainless Steel SCS14/CF8M | 1,0 | 2,2 | | | | | | | | | |
| | | 90 | | | | | | 3.5 | | | | 1,3 | | | | 2,9 | | | | | | | | | | |
| | | 95 | | | | | | 3.7 | | | | 1,2 | | | | 2,6 | | | | | | | | | | |
| SC31F | Flanged JIS, ASME | 1/2" | | | | | | | | | 143 | 61 | 59 | 61 | | 5.6 | 2.4 | 2.3 | 2.4 | Stainless Steel SCS14/CF8M+ SUSF304 | 2,3-2,9 *1 | 5.1-6.4 *1 | | | | |
| | | 3/4" | | | | | | | | | 6.1 | | | | | 2,9-3,9 *1 | | | | | 6.4-8.6 *1 | | | | | |
| | | 1" | | | | | | | | | 6.9 | | | | | 3,6-4,7 *1 | | | | | 7.9-10.3 *1 | | | | | |
| | | 1 1/4" | | | | | | | | | 7.3 | | | | | 4,2-5,5 *1 | | | | | 9.3-12.1 *1 | | | | | |
| | | 1 1/2" | | | | | | | | | 7.7 | | | | | 5,0-7,3 *1 | | | | | 11.0-16.0 *1 | | | | | |
| | | 2" | | | | | | | | | | | | | | 6,1-8,2 *1 | | | | | 13.4-18.1 *1 | | | | | |
| | | SC31F | | | | | | | | | Flanged DIN | | | | | DN15 | | | | | | | | | 150 | 61 |
| DN20 | 6.3 | | | | | | 3,9 | 8,6 | | | | | | | | | | | | | | | | | | |
| DN25 | 4,7 | | | | | | 10,4 | | | | | | | | | | | | | | | | | | | |
| S31N | Screwed Rc, NPT | 1/2" | 1,6 | 230 | 220 | 428 | 90 | 55 | 60 | 60 | 3.5 | 2.2 | 2.6 | 2.4 | Ductile Cast Iron FCD450 | 1,1 | 2,4 | | | | | | | | | |
| | | 3/4" | | | | | 60 | 2.4 | | | 1,2 | 2,6 | | | | | | | | | | | | | | |
| | | 1" | | | | | 95 | 3.7 | | | 1,3 | 2,9 | | | | | | | | | | | | | | |
| | | 1 1/4" | | | | | 180 | 104 | | | 100 | 106 | | | | 7.1 | 4.1 | 3.9 | 4.2 | Cast Iron FC250 | 8,0 | 17,6 | | | | |
| | | 1 1/2" | | | | | 111 | 4.4 | | | 8,7 | 19,2 | | | | | | | | | | | | | | |
| S31NF | Flanged JIS, ASME, DIN | 1/2" | | | | | | | | | 140 | 55 | 60 | 60 | 5.5 | 2.2 | 2.6 | 2.4 | Ductile Cast Iron FCD450 | 2,5 | 5,5 | | | | | |
| | | 3/4" | | | | | | | | | 150 | 5.9 | | | 3,0 | 6,6 | | | | | | | | | | |
| | | 1" | | | | | | | | | 160 | 6.3 | | | 4,2 | 9,3 | | | | | | | | | | |
| | | 1 1/4" | | | | | | | | | 240 | 104 | 100 | 106 | 9.5 | 4.1 | 3.9 | 4.2 | Cast Iron FC250 | 12,0 | 26,4 | | | | | |
| | | 1 1/2" | | | | | | | | | 14,5 | 13,5 | 29,8 | | | | | | | | | | | | | |
| | | 2" | | | | | | | | | | 14,5 | 32,0 | | | | | | | | | | | | | |
| SC - 310 | Screwed Rc, NPT | 3/4" | | | | | | | | | 180 | 87 | 81 | 96 | 7.1 | 3.4 | 3.2 | 3.8 | Cast Iron FC250 | 6,0 | 13,2 | | | | | |
| 1" | | 9.5 | | | | | | | | | | | | | 3.5 | 10,0 | | | | 22,0 | | | | | | |
| SF - 340 | Flanged JIS, ASME, DIN | 3/4" | | | | | | | | | | | | | 240 | 89 | | | | 9.5 | 3.5 | | | | | |
| 1" | | | | | | | | | | | | | | | | | | | | | | | | | | |

*1 Depending on size and flange standard the weight of the traps differs. Please, look at our technical drawings.


SV

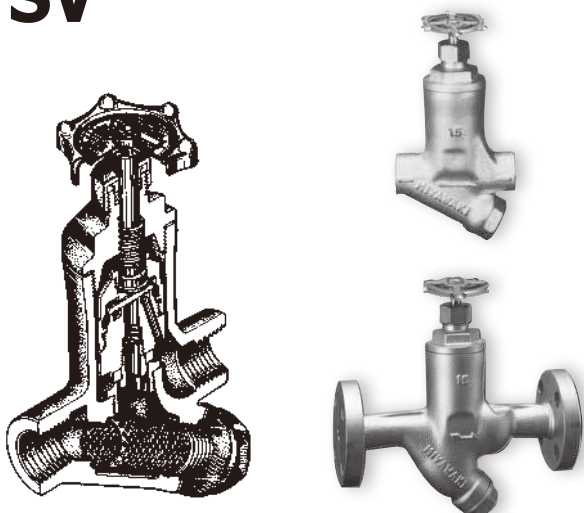


SL3

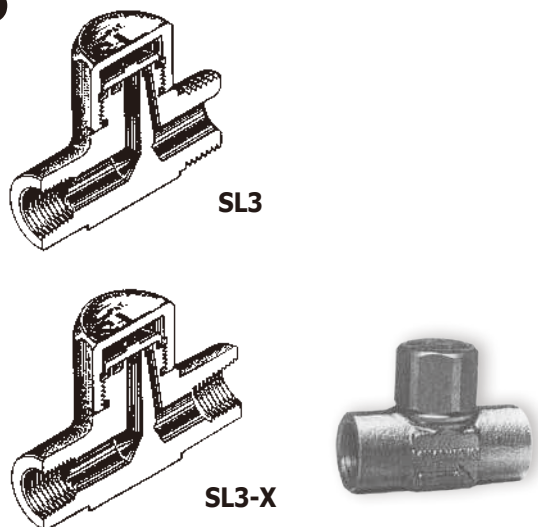


Capacity Chart SV-N

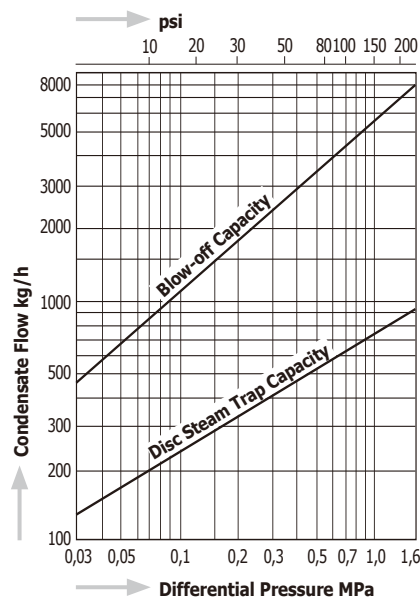


Capacity Chart SV1

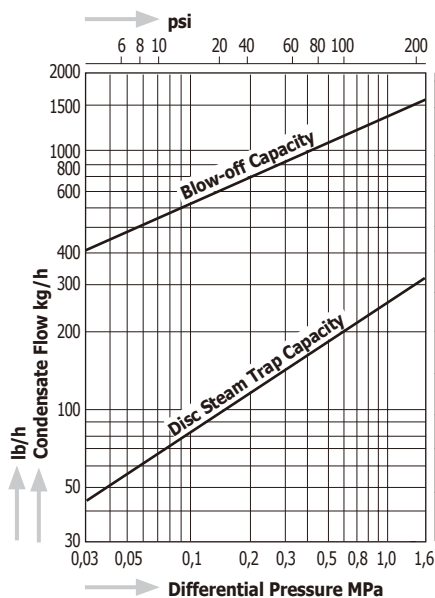

Capacity Chart SL3

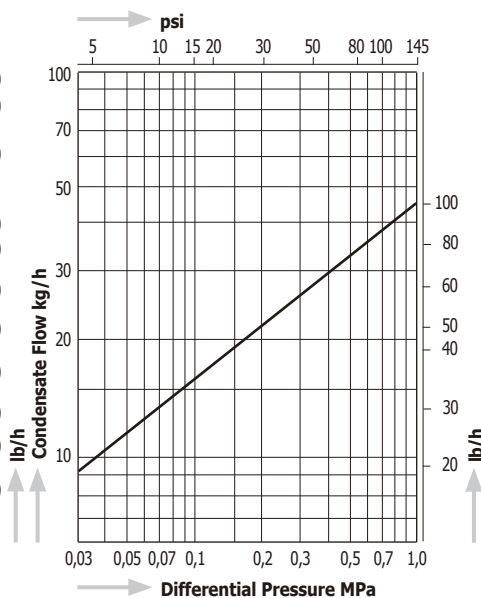



Dimensions

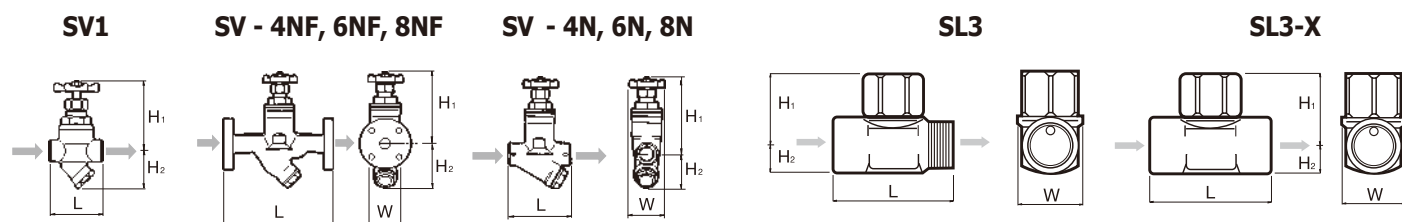

| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|-------|--------------------------------------|------------------------|-------------------------|------|----------------------------|-----|-----------------|----------------|----------------|----|-----------------|----------------|----------------|------|------------------------|--------|------|
| | | | MPa | psig | °C | °F | L | H ₁ | H ₂ | W | L | H ₁ | H ₂ | W | | kg | lb |
| SV1 | Screwed Rc, NPT | 3/8", 1/2" | 1,6 | 230 | 220 | 428 | 75 | 105 | 53 | 65 | 3.0 | 4.1 | 2.1 | 2.6 | Cast Steel WCB | 1,0 | 2.2 |
| | | 107 | | | | | | 4.2 | | | | 1,3 | | | | 2.9 | |
| SV - | Screwed Rc, NPT | 1/2" | 1,6 | 230 | 220 | 428 | 110 | 155 | 60 | 65 | 65 | 4.3 | 6.1 | 2.4 | Cast Iron FC250 | 2,4 | 5.3 |
| | | 3/4" | | | | | | | 2,5 | | | 5.5 | | | | | |
| | | 1" | | | | | | | 2,7 | | | 6.0 | | | | | |
| | | 1/2" | | | | | | | 4,1 | | | 9.0 | | | | | |
| | | Flanged JIS, ASME, DIN | | | | | | | 3/4" | | | 4,7 | | 10.3 | | | |
| | | | | | | | | | 1" | | | 6,5 | | 14.3 | | | |
| SL3 | Screwed Inlet : Rc, NPT Outlet: G | 1/4" | 1,0 | 145 | 400 | 752 | 40 | 22 | 8 | 19 | 1.6 | 0.9 | 0.3 | 0.7 | Stainless Steel SUS416 | 0,06 | 0.13 |
| SL3-X | Screwed Rc, NPT | 1/4" | 1,0 | 145 | 400 | 752 | 40 | 22 | 8 | 19 | 1.6 | 0.9 | 0.3 | 0.7 | | 0,06 | 0.13 |


SU2N, SU2H

SD1

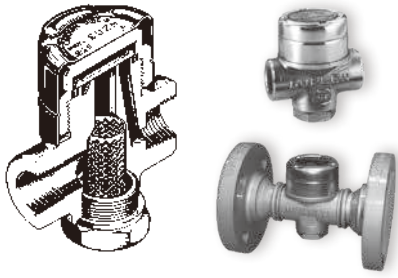

Special face-to-face dimensions available.

Capacity Chart SU2N, SU2H

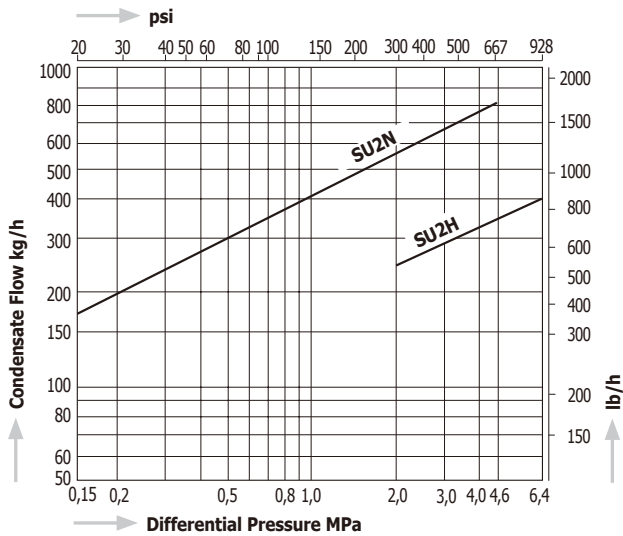

Capacity Chart SD1


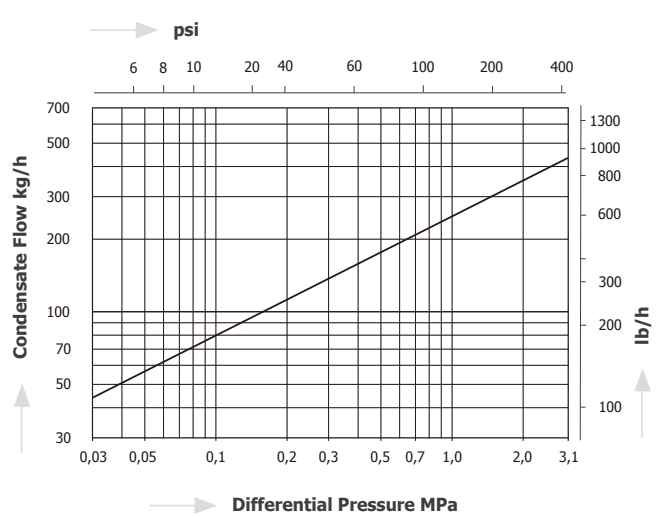


Table 1: Dimensions L and Weights


Dimensions

| Model | Size | Dimension L | | DIN PN40 | | DIN PN63/100 | |
|----------------|------|-------------|-----|----------|-----|--------------|------|
| | | mm | in | kg | lb | kg | lb |
| SU2NF SU2HF | DN15 | 150 | 5.9 | 2,6 | 5,7 | 4,0 | 8,8 |
| | DN20 | | | 3,6 | 7,9 | 5,8 | 12,8 |
| | DN25 | 160 | 6.3 | 4,2 | 9,3 | 7,1 | 15,7 |


SU2N, SU2H




SU2NF, SU2HF



SU2NW, SU2HW



SD1




| Model | Size | Dimension L | | JIS 10/16/20K | | JIS 30K | | JIS 40K | | JIS 63K | | ASME 150lb | | ASME 300lb | | ASME 600lb | | ASME 900lb | |
|----------------|------|-------------|-----|---------------|-----|---------|------|---------|------|---------|------|------------|-----|------------|-----|------------|------|------------|------|
| | | mm | in | kg | lb | kg | lb | kg | lb | kg | lb | kg | lb | kg | lb | kg | lb | kg | lb |
| SU2NF SU2HF | 1/2" | 205 | 8.1 | 2,6 | 5,7 | 3,8 | 8,4 | 4,1 | 9,0 | 4,9 | 10,8 | 2,2 | 4,9 | 2,7 | 6,0 | 3,3 | 7,3 | 5,7 | 12,6 |
| | 3/4" | | | 3,0 | 6,6 | 4,1 | 9,0 | 4,4 | 9,7 | 6,2 | 13,7 | 2,6 | 5,7 | 3,7 | 8,2 | 4,6 | 10,1 | 7,1 | 15,7 |
| | 1" | | | 4,4 | 8,8 | 5,0 | 11,0 | 5,4 | 11,9 | 7,0 | 15,4 | 3,0 | 6,6 | 4,3 | 9,5 | 5,4 | 11,9 | 9,6 | 21,2 |


Applicability of flange standards: JIS 10K/16K and ASME 150lb for SU2NF only
JIS 63K and ASME 900 lb for SU2HF only

| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | | | | | | | | |
|------------------|-------------------------------|------|-------------------------|--------------|----------------------------|-----|-----------------|----|----|----|-----------------|-----|-----|-----|-----------------------------|--------|--------|-----|-----|--|--|--|--|--|
| | | | MPa | psig | °C | °F | L | H1 | H2 | W | L | H1 | H2 | W | | kg | lb | | | | | | | |
| SU2N (SU2H) | Screwed Rc, NPT | 1/2" | 4,6 (6,4) | 667 (928) | 425 | 800 | 70 | 47 | 32 | 53 | 2.8 | 1.9 | 1.3 | 2.1 | Stainless Steel SUS420J2 | 0,8 | 1,8 | | | | | | | |
| | | 3/4" | | | | | 75 | 51 | | | 3.0 | 2.0 | | | | 1,0 | 2,2 | | | | | | | |
| | | 1" | | | | | | | | | | | | | | | | | | | | | | |
| SU2NW (SU2HW) | Socket Weld JIS, ASME, DIN | 1/2" | 4,6 (6,4) | 667 (928) | 425 | 800 | 140 | 47 | 32 | 53 | 5.5 | 1.9 | 1.3 | 2.1 | Stainless Steel SUS420J2 | 1,5 | 3,3 | | | | | | | |
| | | 3/4" | | | | | | | | | | | | | | | | | | | | | | |
| | | 1" | | | | | | | | | | | | | | | | | | | | | | |
| SU2NF (SU2HF) | Flanged JIS, ASME, DIN | 1/2" | 4,6 (6,4) | 667 (928) | 425 | 800 | Table1 | 47 | 32 | 53 | Table1 | 1.9 | 1.3 | 2.1 | Stainless Steel SUS420J2 | Table1 | Table1 | | | | | | | |
| | | 3/4" | | | | | | | | | | | | | | | | | | | | | | |
| | | 1" | | | | | | | | | | | | | | | | | | | | | | |
| SD1 | Screwed Rc, NPT | 1/4" | 3,1 | 450 | 400 | 752 | 52 | 39 | 25 | 34 | 2.0 | 1.5 | 1.0 | 1.3 | Stainless Steel SUS420J2 | 0,3 | 0,7 | | | | | | | |
| | | 3/8" | | | | | 60 | 41 | | | 23 | 2.4 | | | | | | 1.6 | 0.9 | | | | | |
| | | 1/2" | | | | | | | | | | | | | | | | | | | | | | |

S55N, S55H

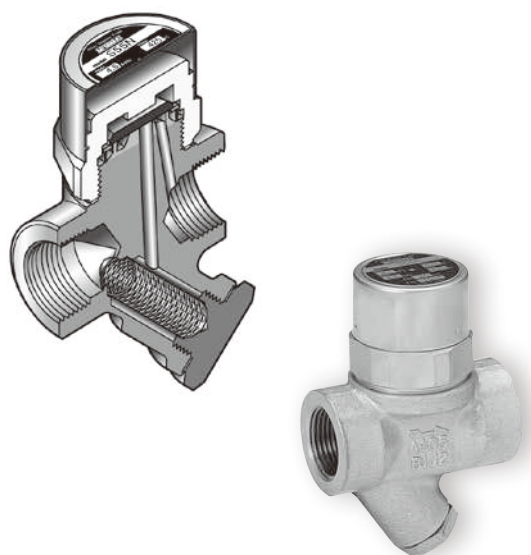

Capacity Chart S55N, S55H

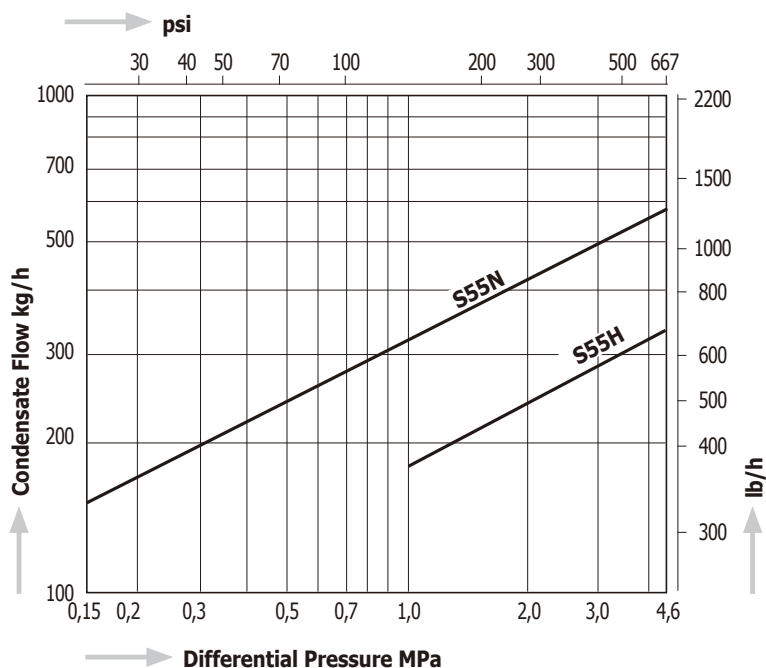

Dimensions

**S55N, S55H,
S55NW, S55HW**

S55NF, S55HF


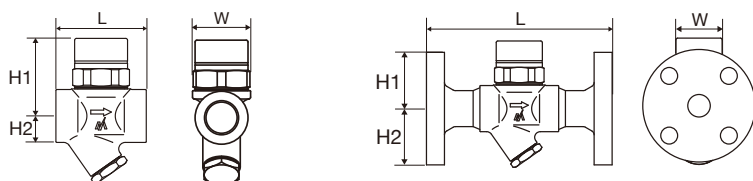


Table 1: Weights


| Model | Size | JIS 10/16K | | JIS 20K | | JIS 30/40K | | ASME 150lb | | ASME 300lb | | ASME 600lb | | DIN PN40 | | DIN PN100 | |
|------------------------|------|------------|-----|---------|-----|------------|------|------------|-----|------------|------|------------|------|----------|-----|-----------|------|
| | | kg | lb | kg | lb | kg | lb | kg | lb | kg | lb | kg | lb | kg | lb | kg | lb |
| S55NF S55HF | 1/2" | 2,6 | 5,7 | 2,8 | 6,2 | 4,0 | 8,8 | 2,6 | 5,7 | 3,1 | 6,8 | 3,2 | 7,1 | 3,1 | 6,8 | 3,7 | 8,2 |
| | 3/4" | 3,1 | 6,8 | 3,3 | 7,3 | 4,4 | 9,7 | 3,1 | 6,8 | 4,0 | 8,8 | 4,2 | 9,3 | 3,7 | 8,2 | 5,3 | 11,7 |
| | 1" | 4,2 | 9,3 | 4,5 | 9,9 | 5,6 | 12,4 | 4,2 | 9,3 | 5,5 | 12,1 | 5,7 | 12,6 | 4,4 | 9,7 | 6,3 | 13,9 |

| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|--------------------------|-------------------------------|------|-------------------------|------|----------------------------|-----|-----------------|-----|--------|--------|-----------------|--------|--------|-----|----------------------|--------|--------|
| | | | MPa | psig | °C | °F | L | H1 | H2 | W | L | H1 | H2 | W | | kg | lb |
| S55N (S55H) | Screwed Rc, NPT | 1/2" | 4,6 | 667 | 425 | 800 | 70 | 60 | 52 | 45 | 2.8 | 2.4 | 2.0 | 1.8 | Forged Steel A105 | 1,0 | 2,2 |
| | | 3/4" | | | | | 75 | 65 | 56 | 3.0 | 2.6 | 2.2 | 1,2 | 2,6 | | | |
| | | 1" | | | | | 140 | 5.5 | 1,2 | 2,6 | | | | | | | |
| S55NF (S55HF) | Flanged JIS, ASME | 1/2" | | | | | 165 | 60 | 52 | 45 | 6.5 | 2.4 | 2.0 | 1.8 | | Table1 | Table1 |
| | | 3/4" | | | | | 175 | 6.9 | Table1 | Table1 | | | | | | | |
| | | 1" | | | | | 150 | 5.9 | 2.4 | 2.0 | 1.8 | Table1 | Table1 | | | | |
| S55NF (S55HF) | Flanged DIN | DN15 | | | | | 160 | 6.3 | 2.4 | 2.0 | 1.8 | Table1 | Table1 | | | | |
| | | DN20 | | | | | 70 | 60 | 52 | 45 | 2.8 | 2.4 | 2.0 | 1.8 | | 1,0 | 2,2 |
| | | DN25 | | | | | 75 | 65 | 56 | 3.0 | 2.6 | 2.2 | 1,2 | 2,6 | | | |
| S55NW (S55HW) | Socket Weld JIS, ASME, DIN | 1/2" | | | | | 4,6 | 667 | 425 | 800 | 70 | 60 | 52 | 45 | | 2.8 | 2.4 |
| | | 3/4" | 75 | 65 | 56 | 3.0 | | | | | 2.6 | 2.2 | 1,2 | 2,6 | | | |
| | | 1" | 140 | 5.5 | 1,2 | 2,6 | | | | | | | | | | | |

S61N, S62N

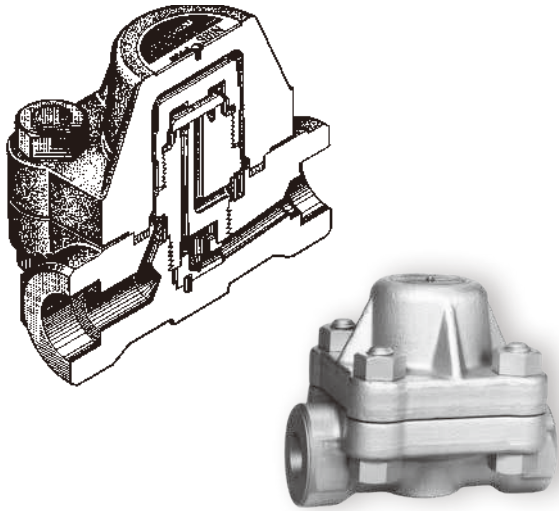

Capacity Chart S61N, S62N

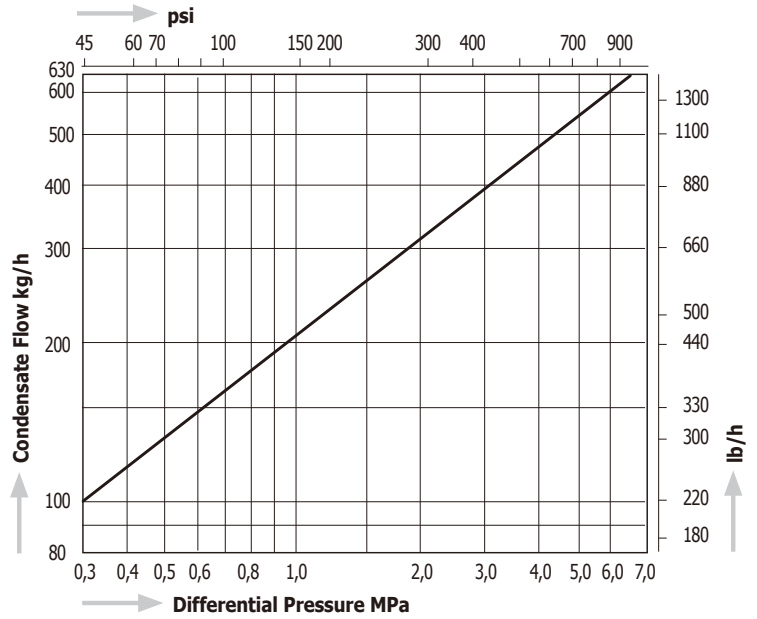

Dimensions

**S61N, S62N,
S61NW, S62NW**





Table 1: Dimensions L and Weight

| Model | Size | JIS 20K | | | | JIS 30K | | | | JIS 40K | | | | JIS 63 K | | | |
|------------------------|------|---------|-----|-----|------|---------|-----|------|------|---------|-----|------|------|----------|-----|------|------|
| | | mm | in | kg | lb | mm | in | kg | lb | mm | in | kg | lb | mm | in | kg | lb |
| S61NF S62NF | 1/2" | 200 | 7.9 | 7,3 | 16.1 | 200 | 7.9 | 8,4 | 18.5 | 200 | 7.9 | 8,7 | 19.2 | 220 | 8.7 | 9,6 | 21.2 |
| | 3/4" | 210 | 8.3 | 7,7 | 17.0 | 210 | 8.3 | 8,9 | 19.6 | 210 | 8.3 | 9,2 | 20.3 | 230 | 9.1 | 11,1 | 24.5 |
| | 1" | 240 | 9.4 | 9,2 | 20.3 | 240 | 9.4 | 10,1 | 22.3 | 240 | 9.4 | 10,5 | 23.1 | 240 | 9.4 | 12,1 | 26.7 |

S61NF, S62NF

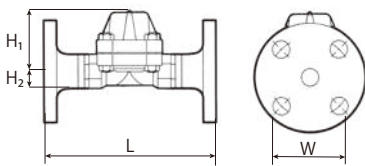


| Model | Size | ASME Class 150 | | | | ASME Class 300 | | | | ASME Class 600 | | | | ASME Class 900 | | | |
|------------------------|------|----------------|-----|-----|------|----------------|-----|-----|------|----------------|-----|-----|------|----------------|-----|------|------|
| | | mm | in | kg | lb | mm | in | kg | lb | mm | in | kg | lb | mm | in | kg | lb |
| S61NF S62NF | 1/2" | 200 | 7.9 | 6,7 | 14.8 | 200 | 7.9 | 7,2 | 15.9 | 200 | 7.9 | 7,3 | 16.1 | 220 | 8.7 | 9,6 | 21.2 |
| | 3/4" | 210 | 8.3 | 7,7 | 17.1 | 210 | 8.3 | 8,2 | 18.1 | 210 | 8.3 | 8,5 | 18.7 | 230 | 9.1 | 10,9 | 24.0 |
| | 1" | 240 | 9.4 | 8,3 | 19.1 | 240 | 9.4 | 9,4 | 20.7 | 240 | 9.4 | 9,6 | 21.2 | 240 | 9.4 | 13,3 | 29.3 |


| Model | Size | DIN PN63 | | | | DIN PN100 | | | |
|------------------------|------|----------|-----|------|------|-----------|-----|------|------|
| | | mm | in | kg | lb | mm | in | kg | lb |
| S61NF S62NF | DN15 | 210 | 8.3 | 9,4 | 20.7 | 210 | 8.3 | 9,4 | 20.7 |
| | DN20 | 230 | 9.1 | 11,4 | 25.1 | 230 | 9.1 | 11,4 | 25.1 |
| | | | | 12,5 | 27.6 | | | 12,5 | 27.6 |

| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|--------------------------|-------------------------------|------|-------------------------|------|----------------------------|--------------------|-----------------|----|----|-----|-----------------|-----|-----|-----|---|---------|---------|
| | | | MPa | psig | °C | °F | L | H1 | H2 | W | L | H1 | H2 | W | | kg | lb |
| S61N (S62N) | Screwed Rc, NPT | 1/2" | 6,5 | 943 | 425 (S62N: 475) | 800 (S62N: 887) | 130 | 90 | 25 | 100 | 5.1 | 3.5 | 1.0 | 3.9 | Forged Steel A105 (S62N: A182F22) | 5,7 | 12.6 |
| | | 3/4" | | | | | | | | | | | | | | | |
| | | 1" | | | | | | | | | | | | | | | |
| S61NF (S62NF) | Flanged JIS, ASME, DIN | 1/2" | 6,5 | 943 | 425 (S62N: 475) | 800 (S62N: 887) | Table 1 | 90 | 25 | 100 | Table 1 | 3.5 | 1.0 | 3.9 | Forged Steel A105 (S62N: A182F22) | Table 1 | Table 1 |
| | | 3/4" | | | | | | | | | | | | | | | |
| | | 1" | | | | | | | | | | | | | | | |
| S61NW (S62NW) | Socket Weld JIS, ASME, DIN | 1/2" | 6,5 | 943 | 425 (S62N: 475) | 800 (S62N: 887) | 130 | 90 | 25 | 100 | 5.1 | 3.5 | 1.0 | 3.9 | Forged Steel A105 (S62N: A182F22) | 5,7 | 12.6 |
| | | 3/4" | | | | | | | | | | | | | | | |
| | | 1" | | | | | | | | | | | | | | | |


SC31

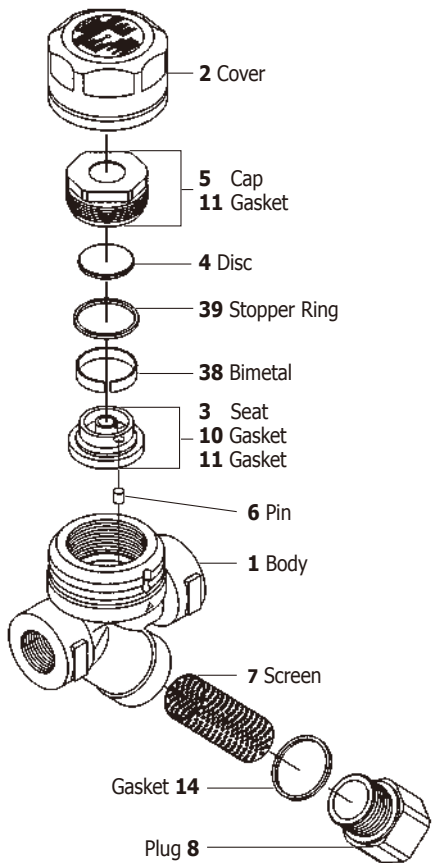


S31N (1/2"-1")

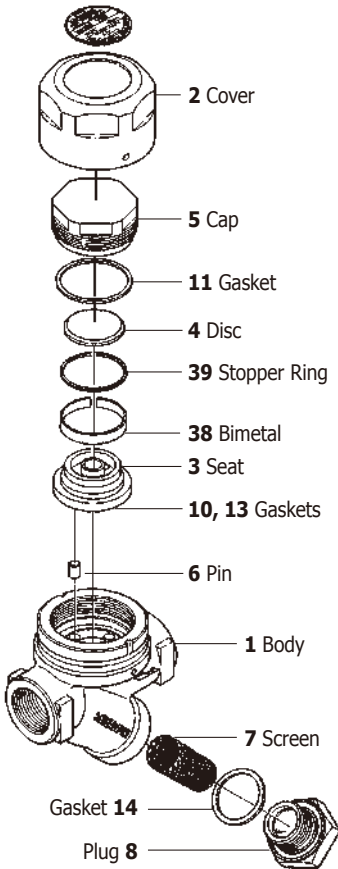


S31N (1 1/4"-2"), SC, SF (3/4"-1")

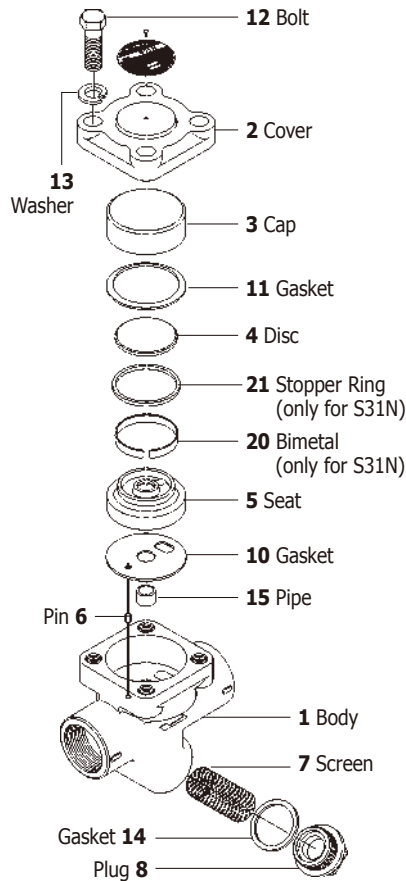


S55N/S55H

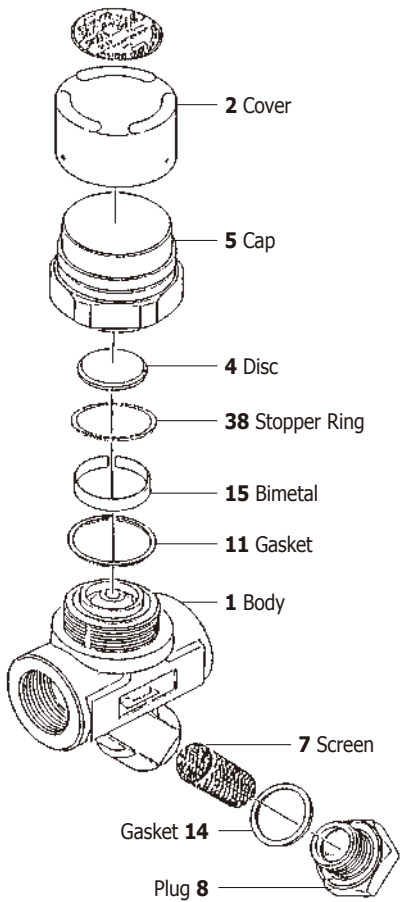


SU2N/SU2H

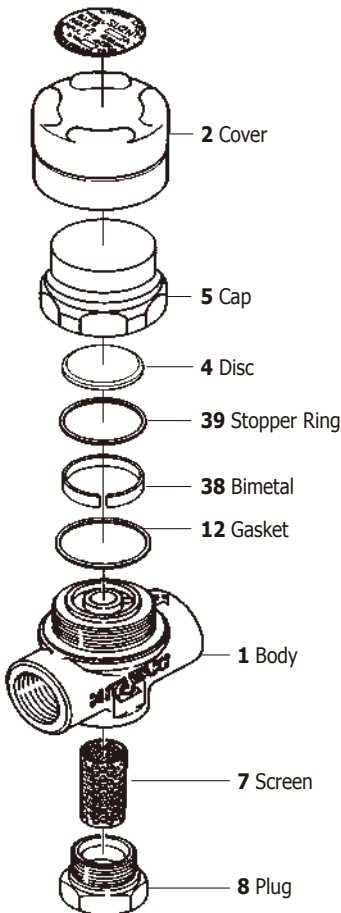


S61N/S62N

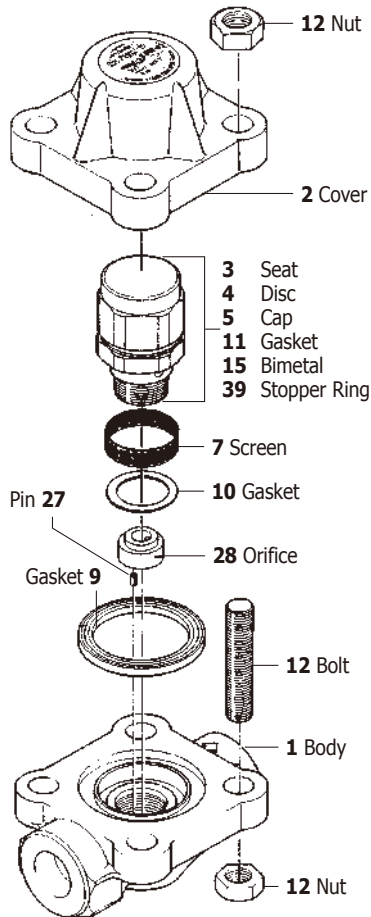


SV1

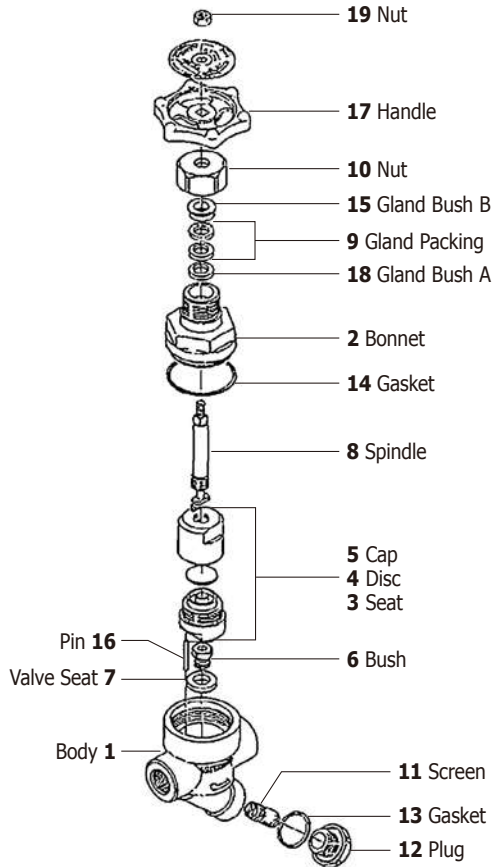


SV-N

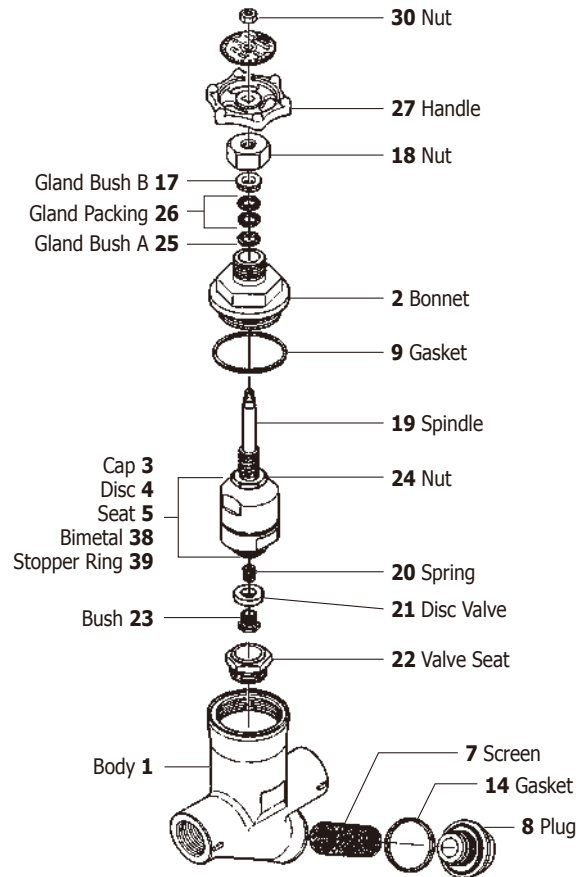

SL3

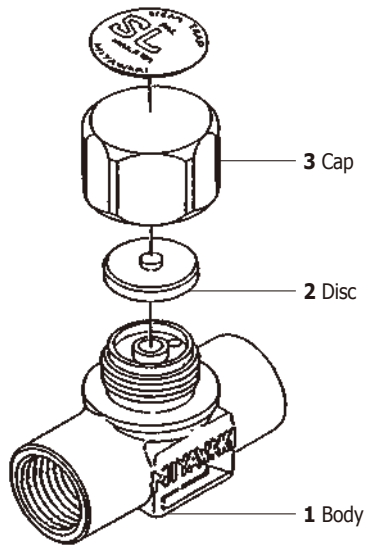

SD1

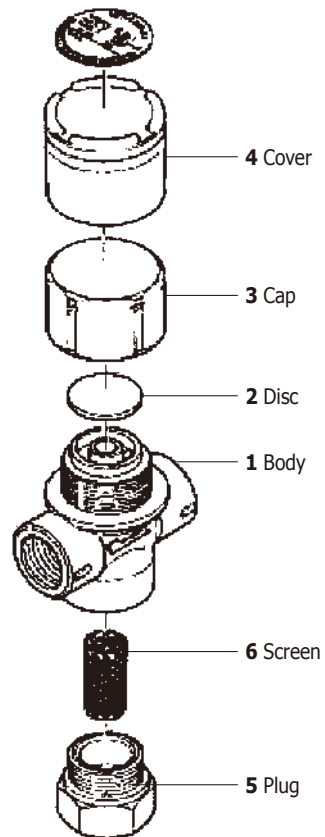

Inverted Bucket Steam Traps

SERIES E

Inverted Bucket Steam Traps belong to the family of mechanical traps. They operate on the difference in density between steam and water. MIYAWAKI offers a very wide range of inverted bucket steam traps for small up to large condensate loads. Inverted bucket steam traps discharge the condensate intermittently.

| | |
|------------------|--|
| Models ER | Cast Iron Inverted Bucket Steam Traps for medium up to high condensate loads |
| ES | Cast Iron Inverted Bucket Steam Traps for small up to medium condensate loads |
| ESH, ER25 | Cast Steel Inverted Bucket Steam Traps for high pressure and small up to high condensate loads |
| ESU | Stainless Steel Inverted Bucket Steam Traps for small up to medium condensate loads |


Features

- All traps are equipped with stainless steel wear and corrosion resistant lever, valve and seat system for long and troubleless life.
- All valves and seats are lapped together.
- Traps of the series E contain the patented SCCV® (Self Closing and Centering Valve) – System, which increases the lifetime of the valve and seat substantially.
- A small hole in the top of the bucket secures continuous automatic air venting.
- All traps are designed for quick and easy inline repairability.
- Withstands high back pressure (up to 90%).

Application

Heat exchangers, dryers, unit heaters, sterilizers and other applications, where condensate must be removed immediately


Super-Discharger



1. Incorporates the **MIYAWAKI SCCV®**-System (see pages 94 – 95)
2. Double valve system with needle pilot valve and main valve (for ER Type)
3. Operates by the pressure difference inside the valve unit
4. Makes the discharge capacity very large
5. Designed for high pressure up to 6,4 MPa (925 psig) – only for ER25

Operating principle

■ cold condensate
 ■ hot condensate
 ■ steam

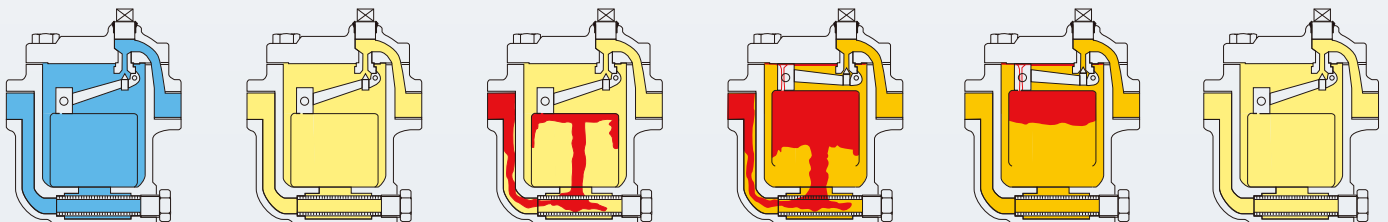

1 & 2

3 & 4


5 & 6

On start-up the bucket is down and the valve is open. Low temperature condensate and air, later high temperature condensate enter the trap. The condensate fills the bucket and the trap body completely. As the bucket is completely submerged in the water, it lies on the bottom of the trap, the valve is wide open and condensate will discharge.


Steam enters the trap under the bottom of the bucket. The more steam is entering the trap, the more it collects at the top of the bucket, causing the bucket to move upwards (buoyancy of the bucket inside the water). At the top position of the bucket the valve will close the seat.

Air and gases pass through a small hole in the top of the bucket and collect at the top of the trap. Steam is also passing through the hole and condensing. When more condensate is entering the trap, the bucket will lose its buoyancy and will move down. The valve will open and condensate will discharge.

ER

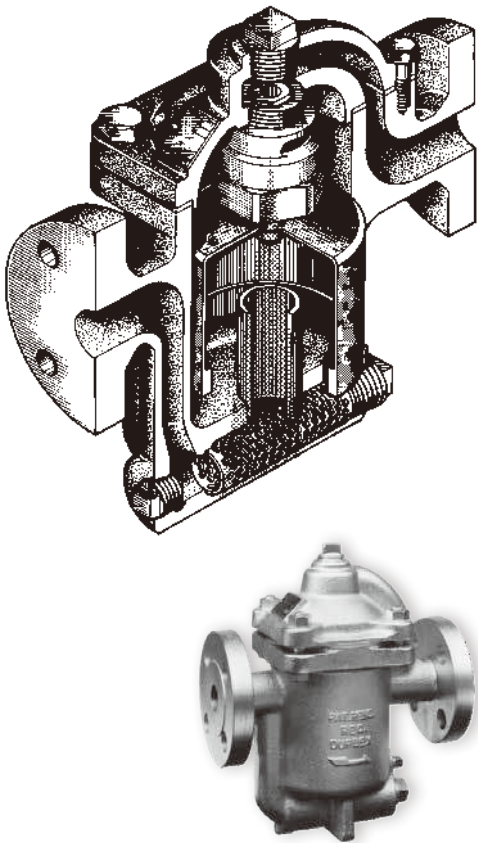




Capacity Chart ER

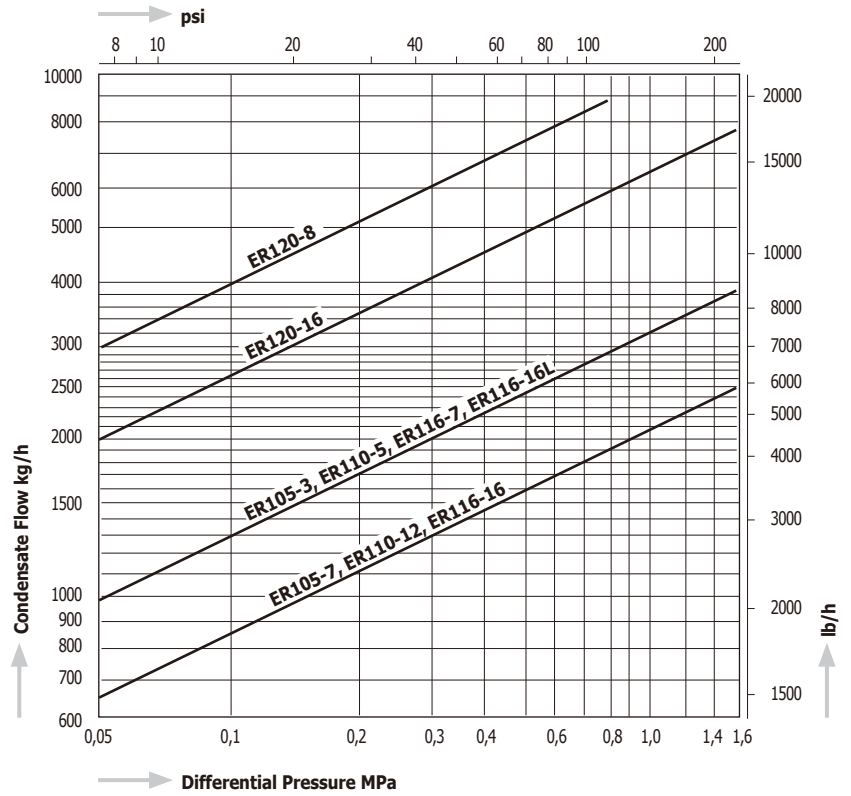

Dimensions


ER105

ER105F, ER110, ER116, ER120




| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|-----------------|---------------------------|-----------|-------------------------|------|----------------------------|-----|-----------------|----------------|----------------|-----|-----------------|----------------|----------------|------|-----------------------------|--------|-------|
| | | | MPa | psig | °C | °F | L | H ₁ | H ₂ | w | L | H ₁ | H ₂ | w | | kg | lb |
| ER105 - 3 7 | Screwed Rc, NPT | ¾" - 1½" | 0,3 | 43 | 220 | 428 | 190 | 155 | 134 | 120 | 7.5 | 6.1 | 5.3 | 4.7 | Cast Iron FC250 | 10,2 | 22.5 |
| | | | 0,7 | 100 | | | 254 | 155 | 134 | 120 | 10.0 | 6.1 | 5.3 | 4.7 | | 13,6 | 29.9 |
| ER105F - 3 7 | Flanged JIS, ASME, DIN | ½" - 1" | 0,3 | 43 | 220 | 428 | 260 | 155 | 134 | 120 | 10.2 | 6.1 | 5.3 | 4.7 | Cast Iron FC250 | 15,1 | 33.2 |
| | | ½" - 1" | 0,7 | 100 | | | 254 | 155 | 134 | 120 | 10.0 | 6.1 | 5.3 | 4.7 | | 13,6 | 29.9 |
| | | 1¼" - 2" | 0,5 | 73 | | | 260 | 155 | 134 | 120 | 10.2 | 6.1 | 5.3 | 4.7 | | 15,1 | 33.2 |
| | | 1¼" - 2" | | | | | 280 | 210 | 130 | 120 | 11.0 | 8.3 | 5.1 | 4.7 | | 18,1 | 39.9 |
| ER110 - 5 12 | Flanged JIS, ASME, DIN | ½" - 1" | 0,5 | 73 | 220 | 428 | 254 | 200 | 140 | 120 | 10.0 | 7.9 | 5.5 | 4.7 | Cast Iron FC250 | 16,1 | 35.4 |
| | | 1¼" - 2" | | | | | 280 | 210 | 130 | 120 | 11.0 | 8.3 | 5.1 | 4.7 | | 18,1 | 39.9 |
| | | ½" - 1" | 1,2 | 174 | | | 254 | 200 | 140 | 120 | 10.0 | 7.9 | 5.5 | 4.7 | | 16,1 | 35.4 |
| | | 1¼" - 2" | | | | | 280 | 210 | 130 | 120 | 11.0 | 8.3 | 5.1 | 4.7 | | 18,1 | 39.9 |
| ER116 - 7 16 | Flanged JIS, ASME, DIN | ½" - 1" | 0,7 | 100 | 300 | 572 | 300 | 230 | 132 | 190 | 11.8 | 9.1 | 5.2 | 7.5 | Ductile Cast Iron FCD450 | 19,0 | 41.8 |
| | | 1¼" - 2" | | | | | 300 | 190 | 167 | 190 | 7.5 | 6.6 | 7.5 | 23,0 | | 50.7 | |
| | | ½" - 1" | 1,6 | 230 | | | 300 | 230 | 132 | 190 | 11.8 | 9.1 | 5.2 | 7.5 | | 19,0 | 41.8 |
| | | 1¼" - 2" | | | | | 300 | 190 | 167 | 190 | 7.5 | 6.6 | 7.5 | 23,0 | | 50.7 | |
| ER120 - 8 16 | Flanged JIS, ASME, DIN | 1½" - 2½" | 0,8 | 116 | 220 | 428 | 400 | 220 | 217 | 235 | 15.8 | 8.7 | 8.5 | 9.3 | Cast Iron FC250 | 46,0 | 101.4 |
| | | | 1,6 | 230 | | | 400 | 220 | 217 | 235 | 15.8 | 8.7 | 8.5 | 9.3 | | 46,0 | 101.4 |


ER25

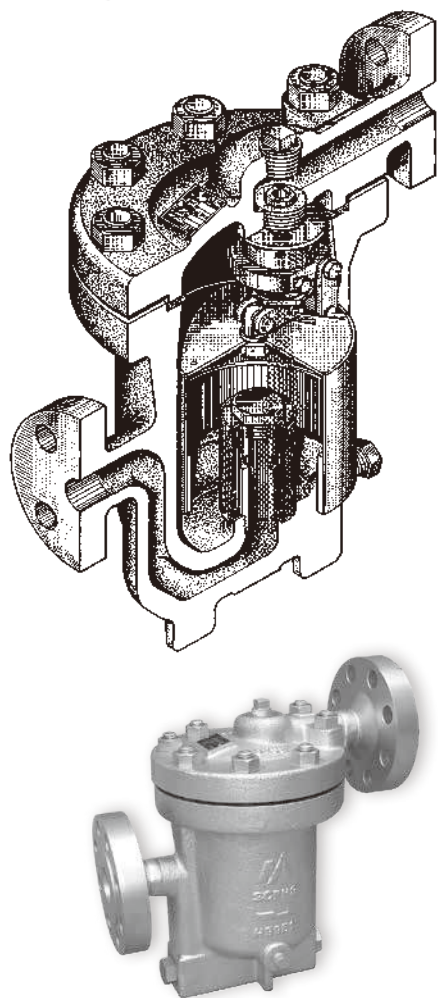

Capacity Chart ER25

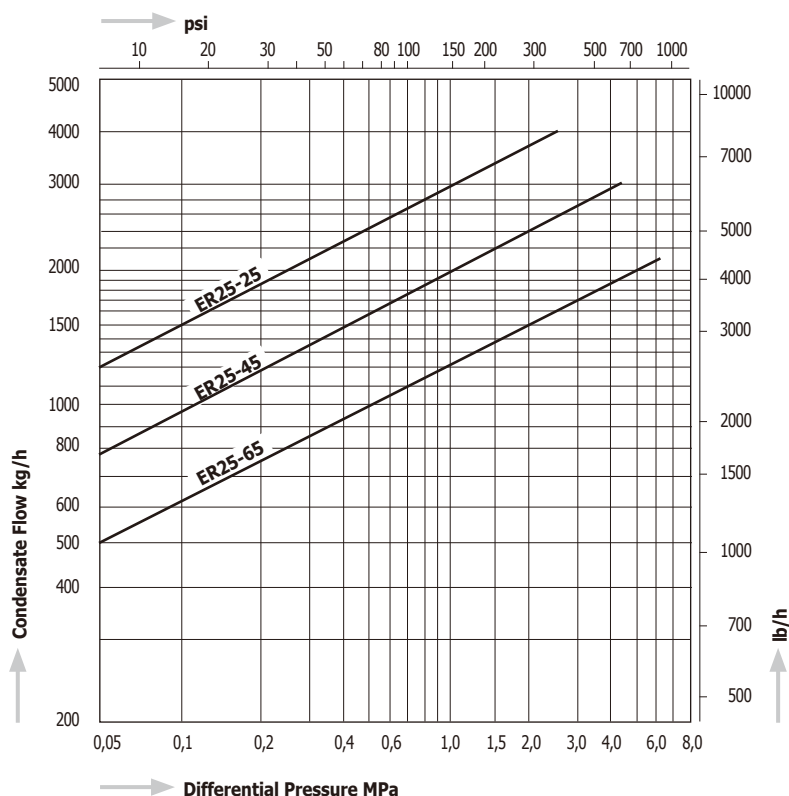

Dimensions ER25

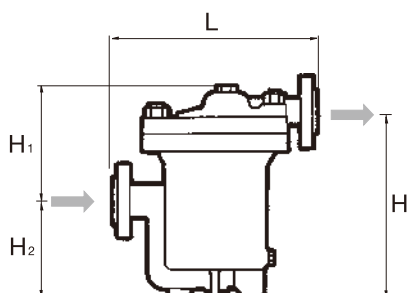

* Available options ER25

Max. operating temperature 470°C (878°F)
with body material WC6



Table 1: Dimensions

| Size | Flange Standards | | | L (mm) | L (in) |
|-------------------------|------------------|---------------------------|--------------------------------|--------|--------|
| | JIS 10 - 40 K | ASME 150 lb / 300 lb RF | DIN PN40 | | |
| ½" - 1" (DN15 - 25) | JIS 10 - 40 K | ASME 150 lb / 300 lb RF | DIN PN40 | 340 | 13.4 |
| | ASME 600 lb RF | ASME 150 - 600 lb RJ | DIN PN63 / PN100 (DN15 / DN20) | 345 | 13.6 |
| | JIS 63 K | ASME 900 lb RF / RJ | DIN PN63 / PN100 (DN25) | 380 | 15.0 |
| 1¼" - 2" (DN32 - 50) | JIS 10 - 40 K | ASME 150 - 600 lb RF / RJ | - | 380 | 15.0 |
| | JIS 63 K | ASME 900 lb RF / RJ | DIN PN40 / PN63 / PN100 | 400 | 15.8 |


| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|----------------|-------------------------------|---------|-------------------------|------|----------------------------|-----|-----------------|----------------|----------------|----------------|-----------------|----------------|----------------|----------------|-----------------------------|----------|-------|
| | | | MPa | psig | °C | °F | L | H ₁ | H ₂ | H ₃ | L | H ₁ | H ₂ | H ₃ | | kg | lb |
| ER25 - | Flanged JIS, ASME, DIN | ½" - 2" | 2,5 | 360 | 425* | 800 | Table 1 | 210 | 180 | 345 | Table 1 | 8.3 | 7.1 | 13.6 | Cast Steel SCPH2/ WCB | ½" - 1" | 112.4 |
| | | | 4,4 | 640 | | | | | | | | | | | | 1¼" - 2" | |
| | | | 6,4 | 925 | | | | | | | | | | | | 58 | |
| ER25W - | Socket Weld JIS, ASME, DIN | ½" - 2" | 2,5 | 360 | 425* | 800 | ½" - 1½" | 210 | 180 | 345 | ½" - 1½" | 8.3 | 7.1 | 13.6 | Cast Steel SCPH2/ WCB | ½" - 1½" | 105.6 |
| | | | 4,4 | 640 | | | | | | | | | | | | 48 | |
| | | | 6,4 | 925 | | | | | | | | | | | | 2" | |

Stainless Steel as body material is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.

ES



Dimensions


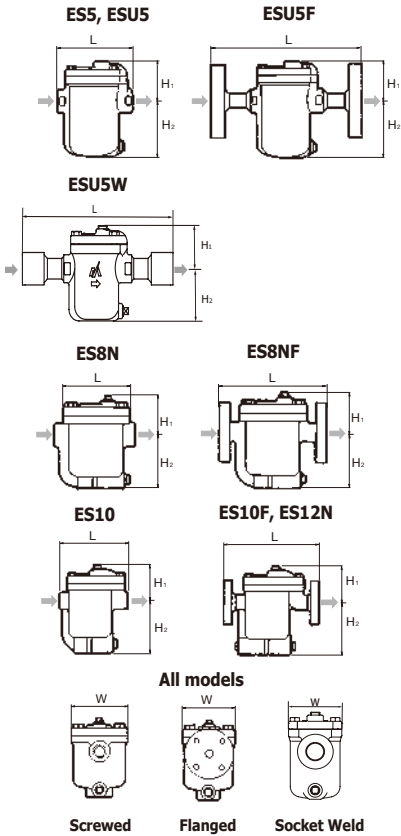


Available options

Depending on the Maximum Operating Pressure the following models are available:

| Model | Max. Operating Pressure | |
|-----------|-------------------------|------|
| | MPa | psig |
| ES5 - 3 | 0,3 | 43 |
| ES5 - 7 | 0,7 | 100 |
| ES5 - 11 | 1,1 | 160 |
| ES5 - 16 | 1,6 | 230 |
| ESU5 - 3 | 0,3 | 43 |
| ESU5 - 7 | 0,7 | 100 |
| ESU5 - 11 | 1,1 | 160 |
| ESU5 - 16 | 1,6 | 230 |
| ESU5 - 21 | 2,1 | 305 |
| ES8N - 5 | 0,5 | 73 |
| ES8N - 8 | 0,8 | 116 |
| ES8N - 16 | 1,6 | 230 |
| ES10 - 8 | 0,8 | 116 |
| ES10 - 12 | 1,2 | 174 |
| ES10 - 16 | 1,6 | 230 |


Capacity Chart ES

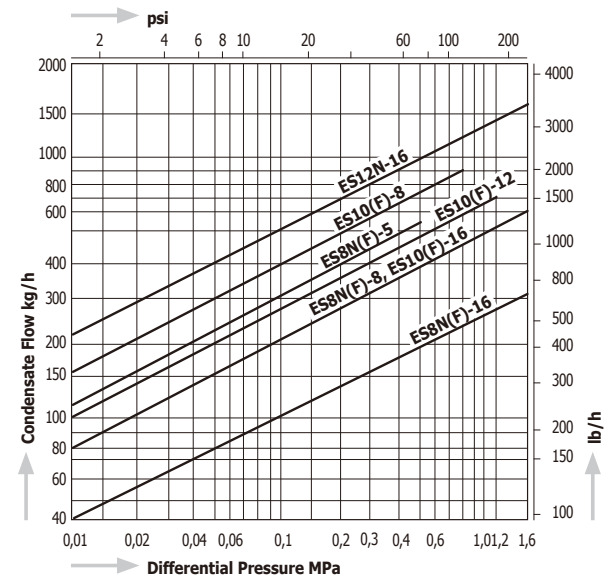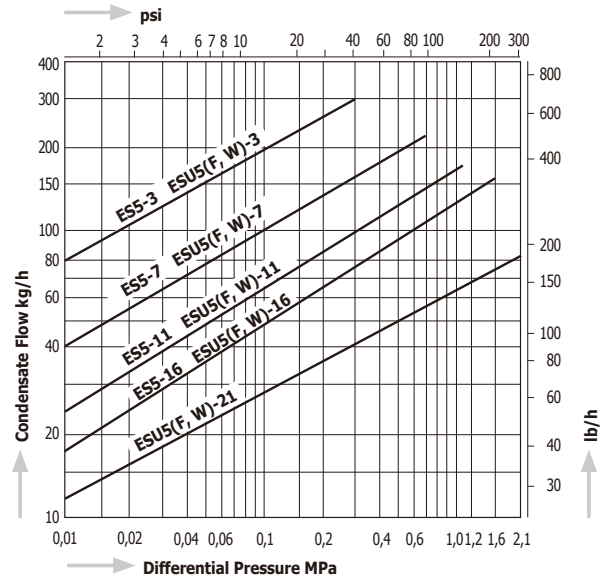


| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|-------|----------------------------|---------------|-------------------------|------|----------------------------|-----|-----------------|----------------|----------------|-----|-----------------|----------------|----------------|-----|----------------------------|--------|------|
| | | | MPa | psig | °C | °F | L | H ₁ | H ₂ | W | L | H ₁ | H ₂ | W | | kg | lb |
| ES5 | Screwed Rc, NPT | 1/2" | 1,6 | 230 | 350 | 662 | 103 | 59 | 67 | 75 | 4.1 | 2.3 | 2.6 | 3.0 | Ductile Cast Iron FCD450 | 1,9 | 4.2 |
| | | 105 | | | | | 57 | 69 | 4.1 | | 2.2 | 2.7 | 1,9 | | | 4.2 | |
| | | 109 | | | | | 57 | 69 | 4.3 | | 2.2 | 2.7 | 2,1 | | | 4.6 | |
| ESU5 | Screwed Rc, NPT | 1/2" | 2,1 | 305 | 350 | 662 | 103 | 57 | 69 | 75 | 4.1 | 2.2 | 2.7 | 3.0 | Stainless Steel SCS13A/CF8 | 1,9 | 4.2 |
| | | 109 | | | | | 57 | 69 | 4.3 | | 2.2 | 2.7 | 2,0 | | | 4.4 | |
| | | 175 | | | | | 57 | 69 | 6.9 | | 2.2 | 2.7 | 2,1 | | | 4.6 | |
| ESU5F | Flanged JIS, ASME, DIN | 1/2" | 2,1 | 305 | 350 | 662 | 195 | 57 | 69 | 75 | 7.7 | 2.2 | 2.7 | 3.0 | Stainless Steel SCS13A/CF8 | 3,5 | 7.7 |
| | | 215 | | | | | 57 | 69 | 8.5 | | 2.2 | 2.7 | 3,7 | | | 8.2 | |
| | | 203 | | | | | 57 | 69 | 8.0 | | 2.2 | 2.7 | 4,1 | | | 9.0 | |
| | | 230 | | | | | 57 | 69 | 9.1 | | 2.2 | 2.7 | 2,5 | | | 5.5 | |
| ESU5W | Socket Weld JIS, ASME, DIN | 1/2" | 2,1 | 305 | 350 | 662 | 254 | 57 | 69 | 75 | 10.0 | 2.2 | 2.7 | 3.0 | Stainless Steel SCS13A/CF8 | 2,6 | 5.7 |
| | | 230 | | | | | 57 | 69 | 9.1 | | 2.2 | 2.7 | 2,5 | | | 5.5 | |
| | | 203 | | | | | 57 | 69 | 8.0 | | 2.2 | 2.7 | 2,6 | | | 5.7 | |
| | | 230 | | | | | 57 | 69 | 9.1 | | 2.2 | 2.7 | 2,6 | | | 5.7 | |
| | | 254 | | | | | 57 | 69 | 10.0 | | 2.2 | 2.7 | 2,8 | | | 6.2 | |
| ES8N | Screwed Rc, NPT | 1/2" | 1,6 | 230 | 350 | 662 | 130 | 73 | 90 | 100 | 5.1 | 2.9 | 3.5 | 3.9 | Ductile Cast Iron FCD450 | 3,7 | 8.2 |
| | | 135 | | | | | 73 | 90 | 5.3 | | 2.9 | 3.5 | 3,9 | | | 8.6 | |
| | | 175 | | | | | 73 | 90 | 6.9 | | 2.9 | 3.5 | 5,3 | | | 11.7 | |
| ES8NF | Flanged JIS, ASME, DIN | 1/2" | 1,6 | 230 | 350 | 662 | 195 | 68 | 95 | 100 | 7.7 | 2.7 | 3.7 | 3.9 | Ductile Cast Iron FCD450 | 5,7 | 12.5 |
| | | 215 | | | | | 68 | 95 | 8.5 | | 2.7 | 3.7 | 6,8 | | | 15.0 | |
| | | 195 | | | | | 68 | 95 | 7.7 | | 2.7 | 3.7 | 5,7 | | | 12.5 | |
| ES10 | Screwed Rc, NPT | 3/4" - 1 1/2" | 1,6 | 230 | 220 | 428 | 190 | 102 | 134 | 120 | 7.5 | 4.0 | 5.3 | 4.7 | Cast Iron FC250 | 9,3 | 20.5 |
| | | 254 | | | | | 102 | 134 | 10.0 | | 4.0 | 5.3 | 12,7 | | | 28.0 | |
| | | 260 | | | | | 102 | 134 | 10.2 | | 4.0 | 5.3 | 14,2 | | | 31.3 | |
| ES10F | Flanged JIS, ASME, DIN | 1/2" - 2" | 1,6 | 230 | 220 | 428 | 270 | 140 | 140 | 120 | 10.6 | 5.5 | 5.5 | 4.7 | Cast Iron FC250 | 13,5 | 29.7 |
| | | 270 | | | | | 140 | 140 | 10.6 | | 5.5 | 5.5 | 13,5 | | | 29.7 | |
| | | 280 | | | | | 150 | 130 | 11.0 | | 5.9 | 5.1 | 15,1 | | | 33.2 | |
| ES12N | Flanged JIS, ASME, DIN | 1/2" - 1" | 1,6 | 230 | 220 | 428 | 270 | 140 | 140 | 120 | 10.6 | 5.5 | 5.5 | 4.7 | Cast Iron FC250 | 13,5 | 29.7 |
| | | 280 | | | | | 150 | 130 | 11.0 | | 5.9 | 5.1 | 15,1 | | | 33.2 | |

Flanged connections for ES5 are available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.


ESH

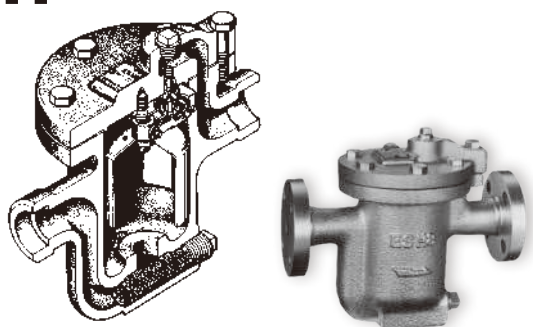

Dimensions

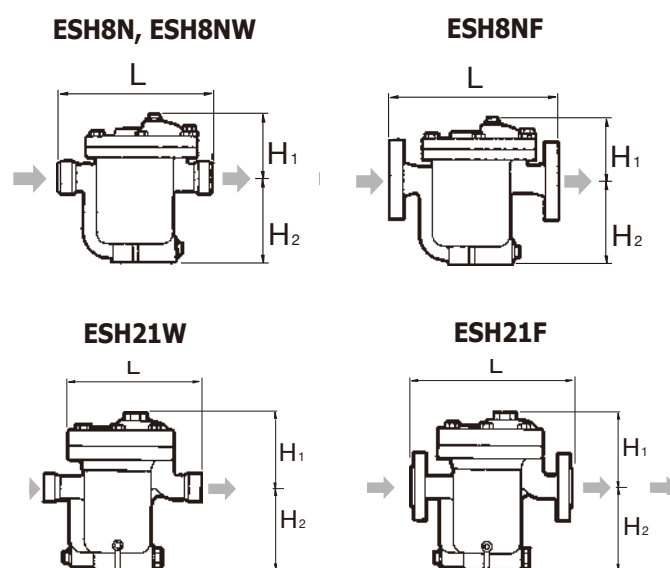

Capacity Chart ESH

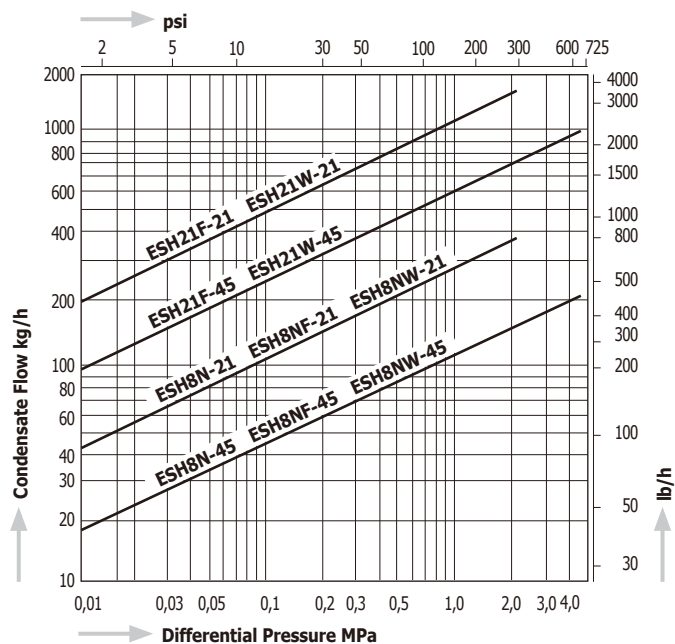

All models

Screwed, Socket Weld

Flanged

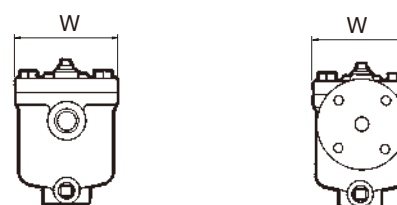



Table 1: weights

| Size | Weight (kg) | | | | | | | | | Weight (lb) | | | | | | | | |
|------|--------------|------|----------|------|---------------|-------|-------|------|-------|--------------|------|----------|------|---------------|-------|-------|------|-------|
| | JIS (FF, RF) | | JIS (RF) | | ASME/JPI (RF) | | | DIN | | JIS (FF, RF) | | JIS (RF) | | ASME/JPI (RF) | | | DIN | |
| | 10K, 16K | 20K | 30K | 40K | 150lb | 300lb | 600lb | PN40 | PN100 | 10K, 16K | 20K | 30K | 40K | 150lb | 300lb | 600lb | PN40 | PN100 |
| 1/2" | 11,0 | 11,0 | 12,4 | 12,8 | 11,4 | 12,1 | 12,1 | 11,3 | 12,2 | 24,2 | 24,2 | 27,3 | 28,2 | 25,1 | 26,6 | 26,6 | 24,9 | 26,9 |
| 3/4" | 12,4 | 12,4 | 13,7 | 14,0 | 11,8 | 12,8 | 13,2 | 12,9 | 15,0 | 27,3 | 27,3 | 30,2 | 30,8 | 26,0 | 28,2 | 29,1 | 28,4 | 33,0 |
| 1" | 13,2 | 13,6 | 14,6 | 15,0 | 12,4 | 13,6 | 14,0 | 15,0 | 18,3 | 29,1 | 29,9 | 32,1 | 33,0 | 27,3 | 29,9 | 30,8 | 33,0 | 40,3 |


| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | | | |
|------------------|----------------------------|-----------|-------------------------|-----------------|----------------------------|-----|-----------------|----------------|----------------|-------------------|-----------------|----------------|----------------|-------------------|---------------|--------|---------|---------|----------------------|
| | | | MPa | psig | °C | °F | L | H ₁ | H ₂ | W | L | H ₁ | H ₂ | W | | kg | lb | | |
| | | | ESH8N - 21 / 45 | Screwed Rc, NPT | 1/2" - 1" | 2,1 | 305 | 400 | 752 | 1/2" - 3/4" = 220 | 114 | 111 | 146 | 1/2" - 3/4" = 8.7 | | 4.5 | 4.4 | 5.7 | Cast Steel SCPH2/WCB |
| ESH8NF - 21 / 45 | Flanged JIS, ASME, DIN | 1/2" - 1" | 4,4 | 640 | 1" | 224 | 250 | | | 114 | 111 | 146 | 9.8 | 4.5 | 4.4 | 5.7 | Table 1 | Table 1 | |
| ESH8NW - 21 / 45 | Socket Weld JIS, ASME, DIN | 1/2" - 1" | 2,1 | 305 | 220 | 114 | 111 | | | 146 | 8.7 | 4.5 | 4.4 | 5.7 | 11,0 | 24,2 | | | |
| ESH21F - 21 / 45 | Flanged JIS, ASME, DIN | 1/2" - 1" | 2,1 | 305 | 350 | 145 | 160 | | | 205 | 13.8 | 5.7 | 6.3 | 8.1 | 31,0 | 68,3 | | | |
| ESH21W - 21 / 45 | Socket Weld JIS, ASME, DIN | 1/2" - 1" | 2,1 | 305 | 300 | 145 | 160 | | | 205 | 11.8 | 5.7 | 6.3 | 8.1 | 28,0 | 61,7 | | | |

Stainless Steel as body material is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.


ES5/ESU5

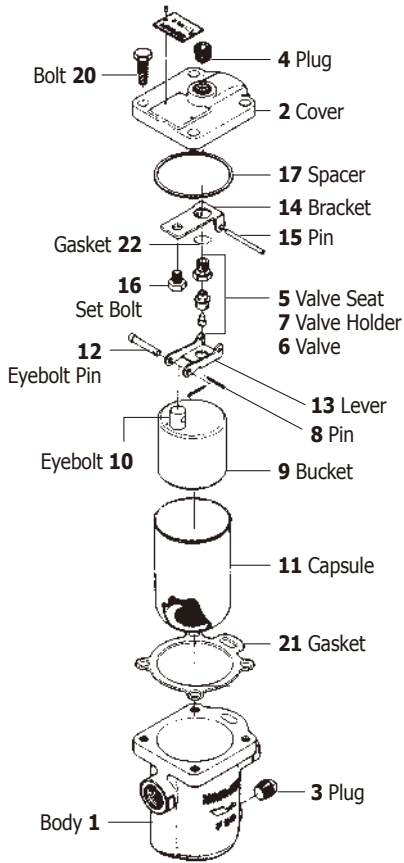


ES8N

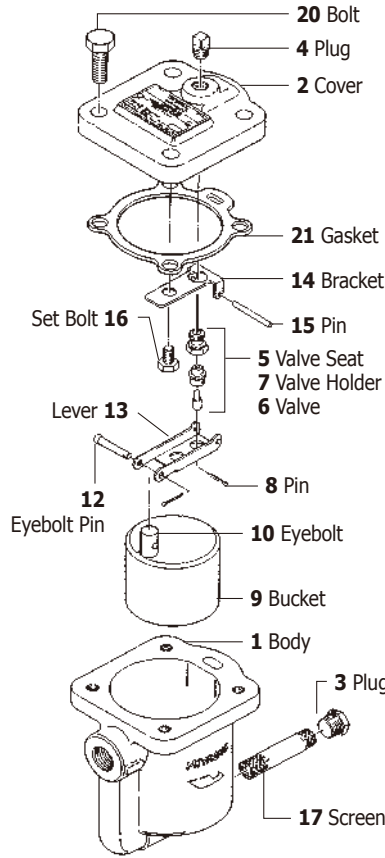


ES10

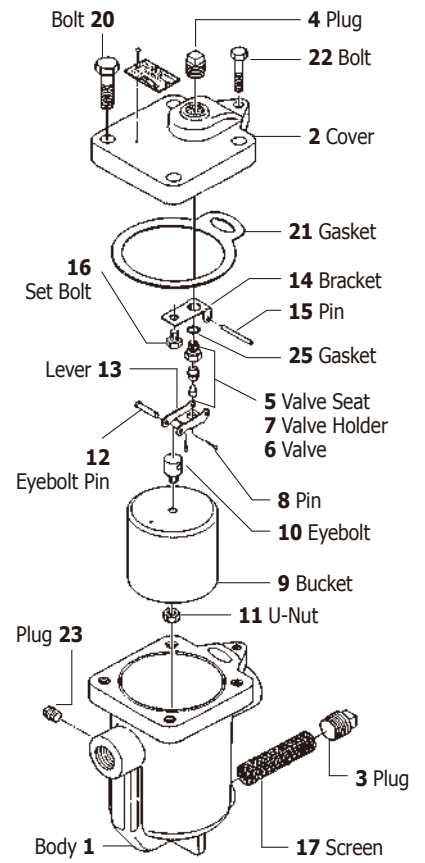


ES12N

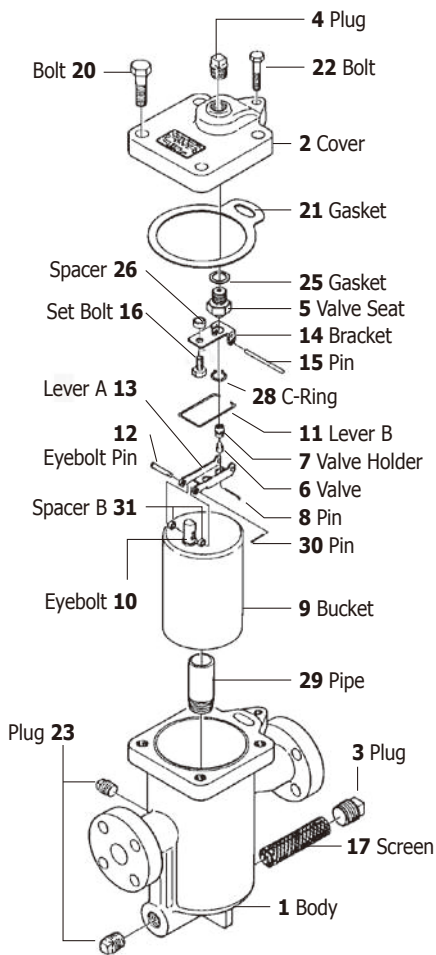


ER105/110/116

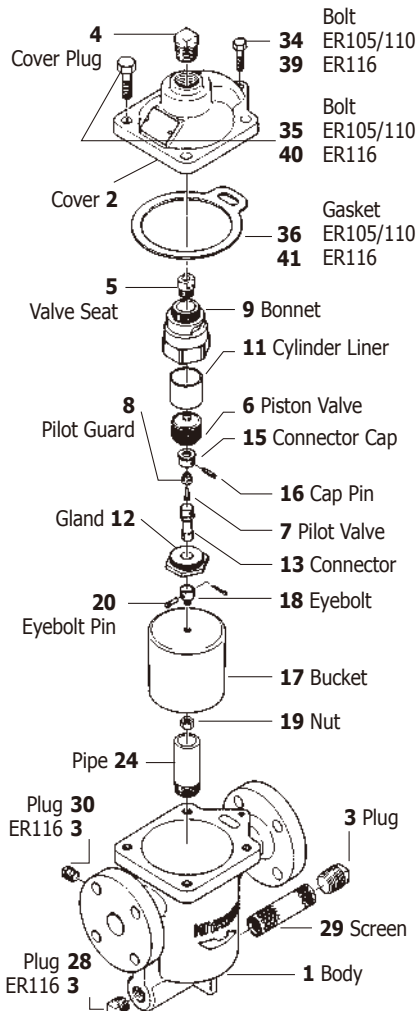


ER120

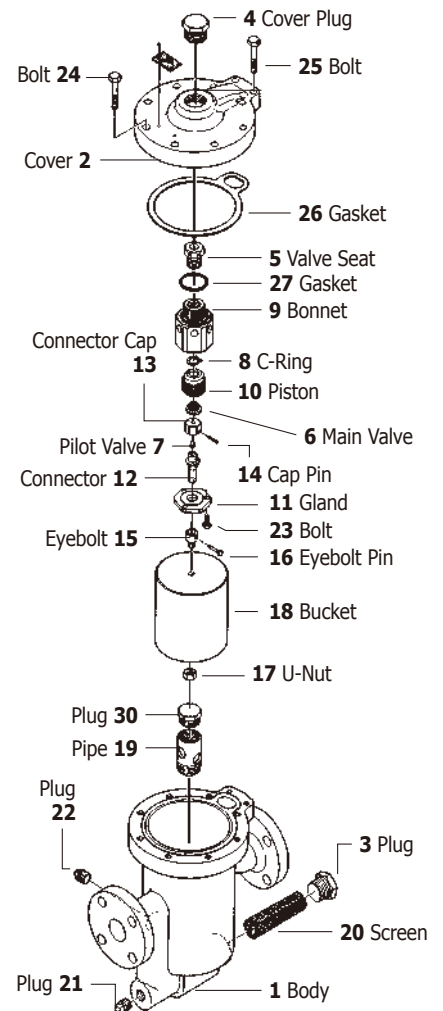


ESH8N

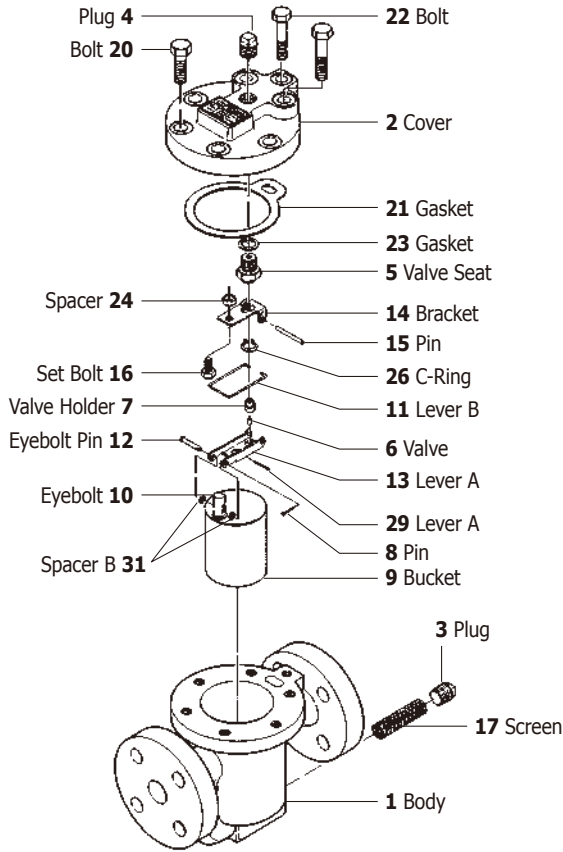

ESH21

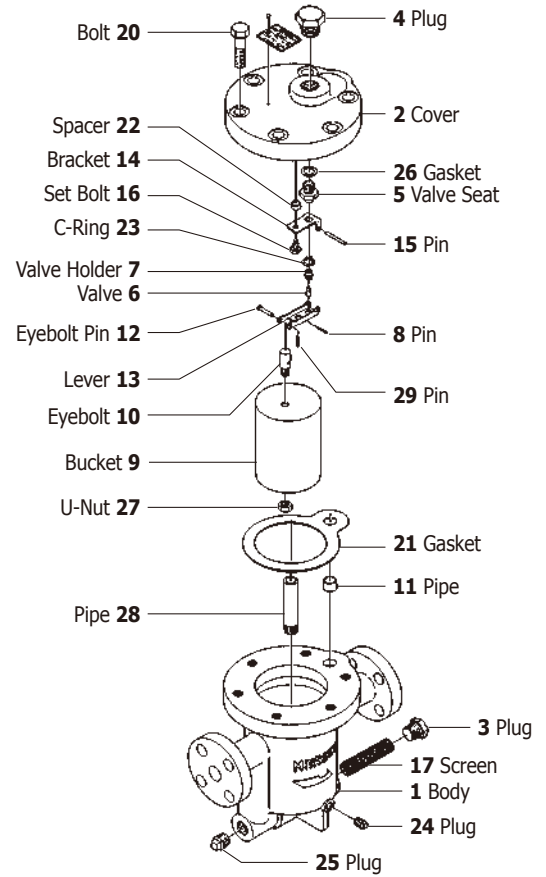

ER25

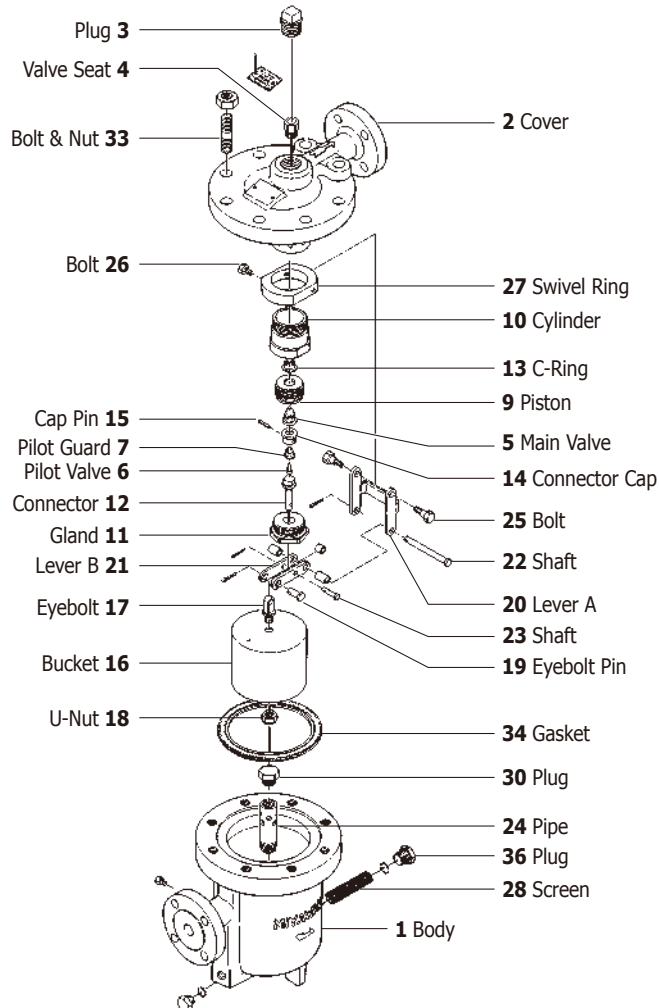

Ball Float Steam Traps

SERIES G

Ball Float Steam Traps belong to the family of mechanical traps. They operate on the difference in density between steam and water. A ball float is connected with a lever to the valve and seat or it is floating freely inside the valve body. Condensate will be discharged once it reaches a certain level inside the trap. Condensate is discharged continuously.

| | | |
|---------------|--|--|
| Models | G11N, G12N | Cast Iron Steam Traps for small and medium condensate loads |
| | G15N | Cast Iron Steam Trap for low pressure and large condensate loads |
| | G3N, G5 | Ductile Cast Iron Steam Traps for large condensate loads |
| | G20N, G30 | Ductile Cast Iron Steam Trap for medium condensate loads |
| | GH3N, GH5, GH50, GH60, GH70 | Cast Steel Steam Traps for large condensate loads |
| | GH40, GTH12, GTH10, GWH70 | Cast Steel Steam Traps for medium condensate loads |
| | GC1N, GC1V | Stainless Steel Steam Traps for small condensate loads |
| | GC20N | Stainless Steel Steam Trap for medium condensate loads |


- Features**
- All traps are equipped with stainless steel wear and corrosion resistant float, lever, valve and seat systems for a long and problem free operation.
 - Each ball float steam trap is equipped with an air vent for venting air and gases at the time of start-up and during operation.
 - The large capacity steam traps like G15N use a double ported balance valve system, which is small in its physical size compared with the very high capacity of the traps.
 - All traps are designed for quick and easy maintenance.

Application

Ball Float Steam Traps can be used in all process applications, like all kind of heat exchangers, tank and unit heaters and others, where condensate must be removed immediately after it forms.

The type GC1N is especially designed for applications in the food, pharmaceutical and other industries with small condensate loads and the need for stainless steel bodies. It can be also installed for drainage of steam main lines.

Operating principle

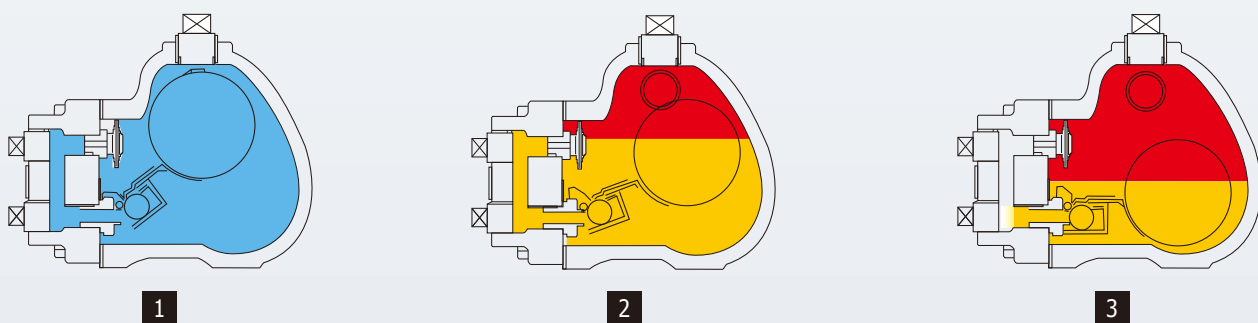


On start-up air is quickly discharged through the thermostatic air vent (membrane or bimetal type). Cold condensate fills the steam trap body. As soon as a certain water level is reached, the float rises and opens the valve. The cold condensate is discharged through the open valve and the open air vent.


When the condensate reaches saturation temperature, the air vent closes and condensate is discharged only through the main valve orifice. The condensate forms a water seal inside the trap body, which prevents live steam loss at all times.

The opening degree of the valve is regulated by the water level inside the trap body. Condensate is discharged continuously. As long as air enters the trap and accumulates at the top of the trap body, the temperature cools down a little bit and the air vent, which opens slightly below saturation temperature, begins to discharge the air from the trap.


G11N, G12N

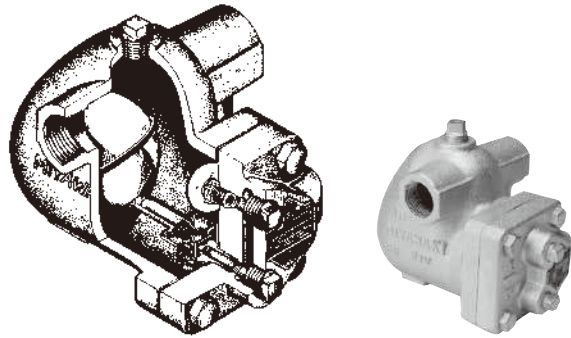


G15N

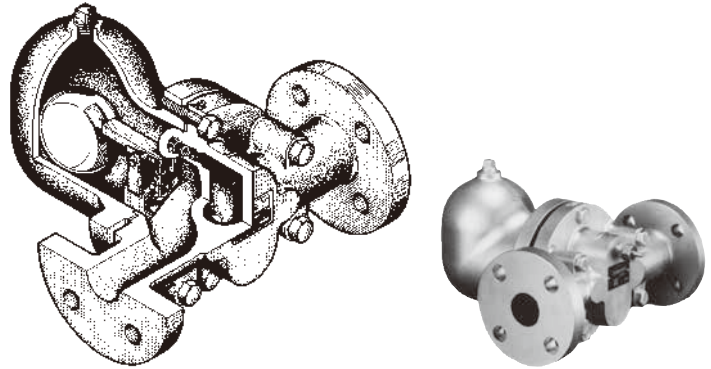


Capacity Chart G11N, G12N

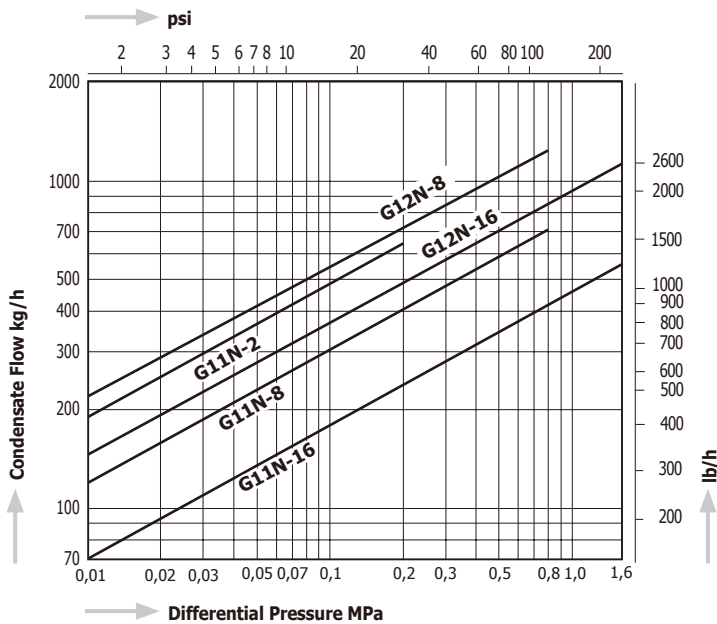


Capacity Chart G15N

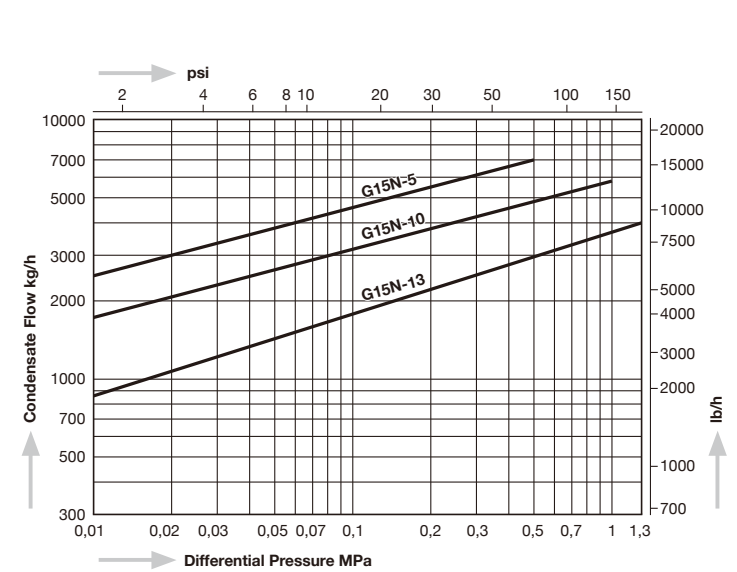

Dimensions G11N, G12N

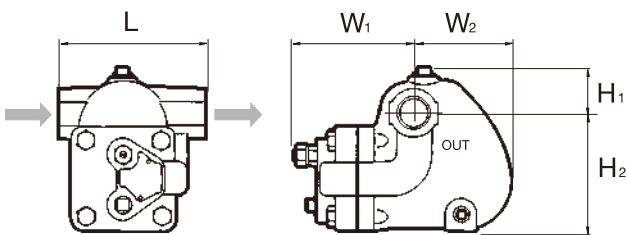

Dimensions G15N

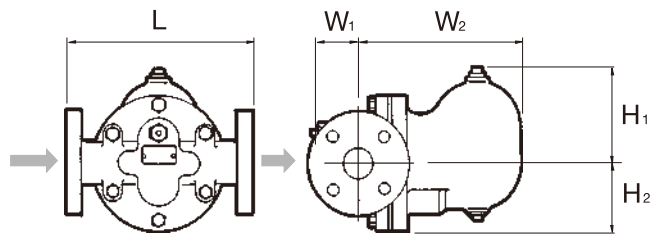


| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | | Dimensions (in) | | | | | Body Material | Weight | | | |
|----------------------|------------------------|----------|-------------------------|------|----------------------------|-----|-----------------|----------------|----------------|----------------|----------------|-----------------|----------------|----------------|----------------|----------------|-----------------|--------|-----|------|------|
| | | | MPa | psig | °C | °F | L | H ₁ | H ₂ | W ₁ | W ₂ | L | H ₁ | H ₂ | W ₁ | W ₂ | | kg | lb | | |
| G11N - 2 8 16 | Screwed Rc, NPT | ½", ¾" | 0,2 | 29 | 220 | 428 | 120 | 37 | 92 | 97 | 60 | 4.7 | 1.5 | 3.6 | 3.8 | 2.4 | Cast Iron FC250 | 3,9 | 8.6 | | |
| | | | 0,8 | 116 | | | | | | | | | | | | | | | | | |
| | | | 1,6 | 230 | | | | | | | | | | | | | | | | | |
| G12N - 8 16 | Screwed Rc, NPT | ¾", 1" | 0,8 | 116 | 220 | 428 | 140 | 47 | 113 | 102 | 92 | 5.5 | 1.9 | 4.4 | 4.0 | 3.6 | | | | 6,0 | 13.2 |
| | | | 1,6 | 230 | | | | | | | | | | | | | | | | | |
| G15N - 5 10 13 | Flanged JIS, ASME, DIN | 1¼" - 2" | 0,5 | 73 | 220 | 428 | 300 | 130 | 90 | 30 | 230 | 11.8 | 5.1 | 3.5 | 1.2 | 9.1 | | | | 20,0 | 44.0 |
| | | | 1,0 | 145 | | | | | | | | | | | | | | | | | |
| | | | 1,3 | 189 | | | | | | | | | | | | | | | | | |

For G11N and G12N, flanged connection is available as special design. Please contact MIYAWAKI Inc. or an authorized representative.

G20N


GC20N

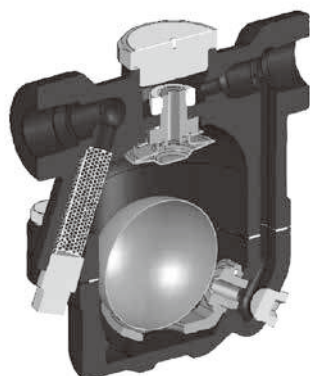

Screwed



Flanged Connection

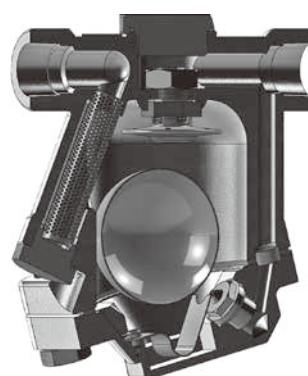


Screwed




Flanged Connection


Capacity Chart G20N / GC20N

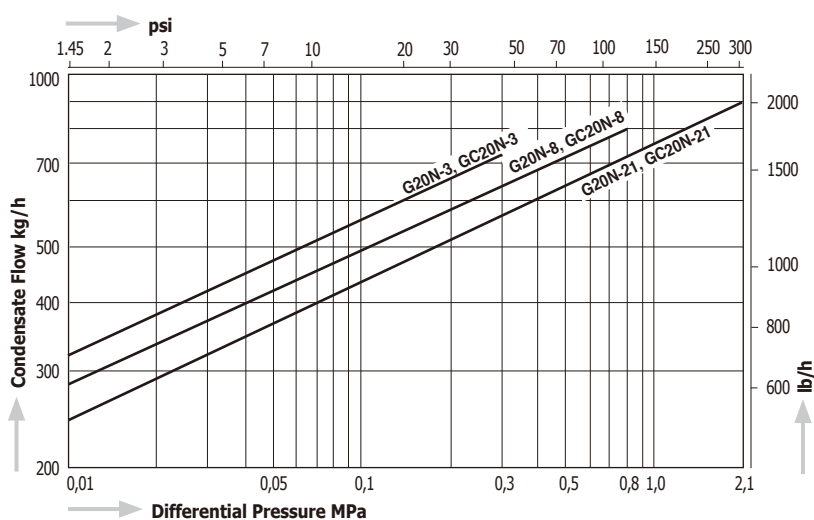

Dimensions G20N

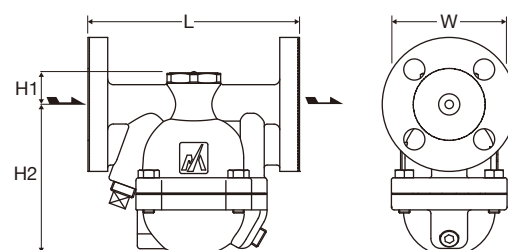

Dimensions GC20N

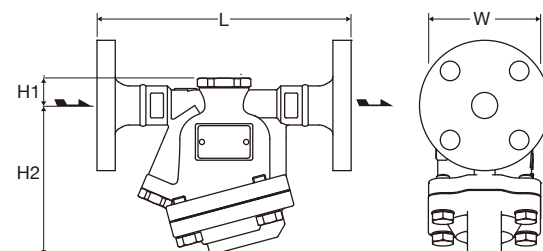

Available versions G20N / GC20N


Max. Operating Pressure:

- G20N (GC20N)- 3 0,3 MPa (43 psig)
- G20N (GC20N)- 8 0,8 MPa (116 psig)
- G20N (GC20N)- 21 2,1 MPa (305 psig)

| Model | Connections | Size | Max. Operating Pressure, PMO | | Max. Operating Temperature, TMO | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | | | | | | | | | |
|-------------|-------------------|------|------------------------------|------|---------------------------------|-----|-----------------|-----|-----|-----|-----------------|-----|-----|-----|--------------------------|--------|-----|------|------|----------------------------|-------|-------|-----|-----|-----|
| | | | MPa | psig | °C | °F | L | H1 | H2 | W | L | H1 | H2 | W | | kg | lb | | | | | | | | |
| G20N | Screwed Rc, NPT | 1/2" | 2,1 | 305 | 220 | 428 | 120 | 24 | 105 | 82 | 4.7 | 1.0 | 4.1 | 3.2 | Ductile Cast Iron FCD450 | 2,5 | 5.5 | | | | | | | | |
| | | 3/4" | | | | | | | 107 | | | | 4.2 | | | 2,6 | 5.7 | | | | | | | | |
| | | 1" | | | | | | | | | | | | | | | | | | | | | | | |
| G20NF | Flanged JIS, ASME | 1/2" | | | | | 2,1 | 305 | 220 | 428 | 150* | 24 | 105 | 82 | | 5.9 | 1.0 | 4.1 | 3.2 | Ductile Cast Iron FCD450 | 3,8* | 8.4* | | | |
| | | 3/4" | | | | | | | | | 6.3 | | | | | | | | | | 4,2* | 9.2* | | | |
| | | 1" | | | | | | | | | | | | | | | | | | | 5,3* | 11.7* | | | |
| | Flanged DIN | DN15 | | | | | | | | | 24 | 105 | 82 | 5.9 | | 1.0 | 4.1 | 3.2 | 3,7 | | 8.1 | | | | |
| | | DN20 | | | | | | | | | | | | | | | | | 4,2 | | 9.2 | | | | |
| | | DN25 | | | | | | | | | | | | | | | | | 4,8 | | 10.6 | | | | |
| GC20N | Screwed Rc, NPT | 1/2" | | | | | 2,1 | 305 | 220 | 428 | 120 | 21 | 113 | 86 | | 4.7 | 0.8 | 4.4 | 3.4 | Stainless Steel SCS13A/CF8 | 2,4 | 5.3 | | | |
| | | 3/4" | | | | | | | | | | | | | | | | | | | 6.9 | 2,5 | 5.5 | | |
| | | 1" | | | | | | | | | | | | | | | | | | | | | | 7.7 | 0.8 |
| GC20NF | Flanged JIS, ASME | 1/2" | 2,1 | 305 | 220 | 428 | | | | | 175 | 21 | 113 | 86 | 6.9 | 0.8 | 4.4 | 3.4 | 3,9* | | | | | | |
| | | 3/4" | | | | | | | | | 8.5 | | | | | | | | 5,0* | | 11.0* | | | | |
| | | 1" | | | | | | | | | | | | | | | | | 5,8* | | 12.8* | | | | |
| Flanged DIN | DN15 | 21 | | | | | | | | | 113 | 86 | 5.9 | 0.8 | 4.4 | 3.4 | 3,4 | 7.5 | | | | | | | |
| | DN20 | | | | | | | | | | | | | | | | 3,9 | 8.6 | | | | | | | |
| | DN25 | | | | | | | | | | | | | | | | 4,6 | 10.1 | | | | | | | |


*Depending on the flange rating, the weight and length may differ.

G30

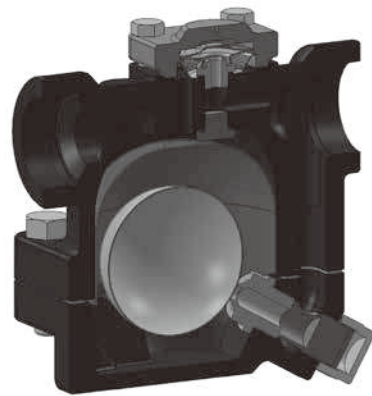


Dimensions


G30 Screwed

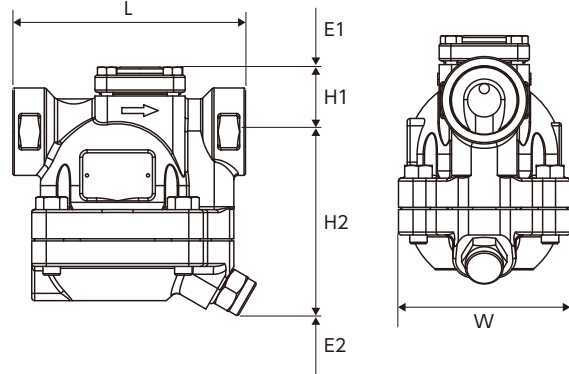

G30-F Flanged

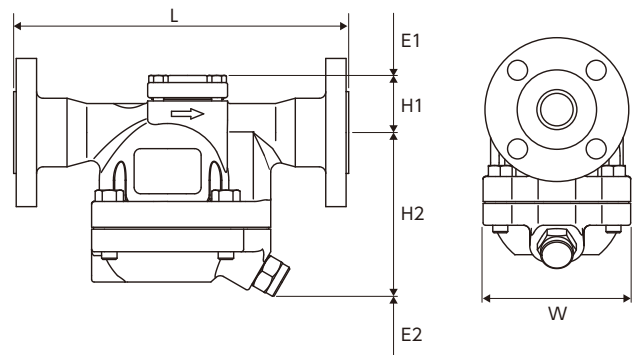


Capacity Chart

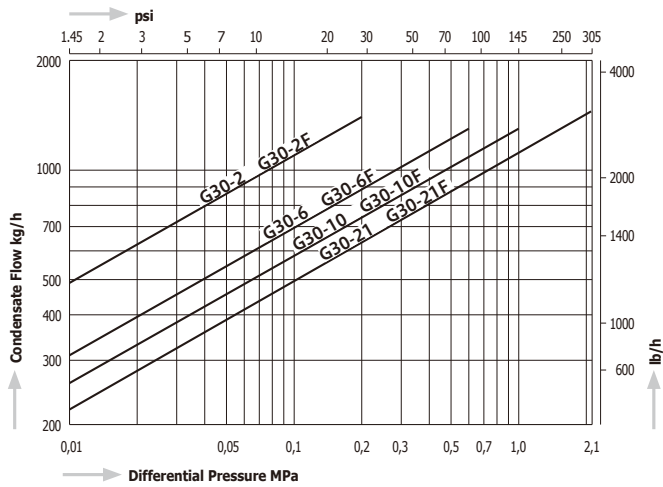


| Connections | Size | Dimensions (mm) | | | | Dimensions (in) | | | | Weight | |
|------------------|------|-----------------|----------------|----------------|-----|-----------------|----------------|----------------|-----|--------------|-------|
| | | L | H ₁ | H ₂ | W | L | H ₁ | H ₂ | W | kg | lb |
| Rc | ¾" | 155 | 44 | 125 | 118 | 6.1 | 1.7 | 4.9 | 4.6 | 6,7 | 14.8 |
| | 1" | | | | | | | | | 6,5 | 14.3 |
| | 1¼" | 160 | | | | 6,3 | | | | 13,9 | |
| | 1½" | | | | | 6,3 | | | | 13,9 | |
| NPT | ¾" | 155 | 44 | 125 | 118 | 6.1 | 1.7 | 4.9 | 4.6 | 6,7 | 14.8 |
| | 1" | 160 | | | | 6.3 | | | | 6,6 | 14.6 |
| | 1¼" | 165 | | | | 6.5 | | | | 6,5 | 14.3 |
| | 1½" | | | | | 6,3 | | | | 13,9 | |
| Flanged ASME/JPI | 1¼" | 260 | 44 | 125 | 118 | 10.2 | 1.7 | 4.9 | 4.6 | 9,1 | 20.0 |
| | 1½" | | | | | | | | | 10,0 | 22.0 |
| Flanged JIS | 1¼" | 260 | 44 | 125 | 118 | 10.2 | 1.7 | 4.9 | 4.6 | ~10,5 | ~23.1 |
| | 1½" | *JIS20K:264 | | | | | | | | *JIS20K:10.4 | ~10,8 |
| Flanged PN25 | DN32 | 230 | 44 | 125 | 118 | 9.0 | 1.7 | 4.9 | 4.6 | 10,1 | 22.3 |
| | DN40 | | | | | | | | | 10,9 | 24.0 |

| Model | Max. Allowable Pressure (PMA) | | Max. Allowable Temperature (TMA) | | Max. Operating Pressure (PMO) | | Max. Operating Temperature (TMO) | | Body Material |
|---------|-------------------------------|------|----------------------------------|-----|-------------------------------|------|----------------------------------|-----|-----------------------------|
| | MPa | psig | °C | °F | MPa | psig | °C | °F | |
| G30-2 | 2,5 | 363 | 250 | 482 | 0,2 | 29 | 235 | 455 | Ductile Cast Iron FCD450 |
| G30-6 | | | | | 0,6 | 87 | | | |
| G30-10 | | | | | 1 | 145 | | | |
| G30-21 | | | | | 2,1 | 305 | | | |
| G30-2F | | | | | 0,2 | 29 | | | |
| G30-6F | | | | | 0,6 | 87 | | | |
| G30-10F | | | | | 1 | 145 | | | |
| G30-21F | | | | | 2,1 | 305 | | | |

G3N, G5 GH3N, GH5

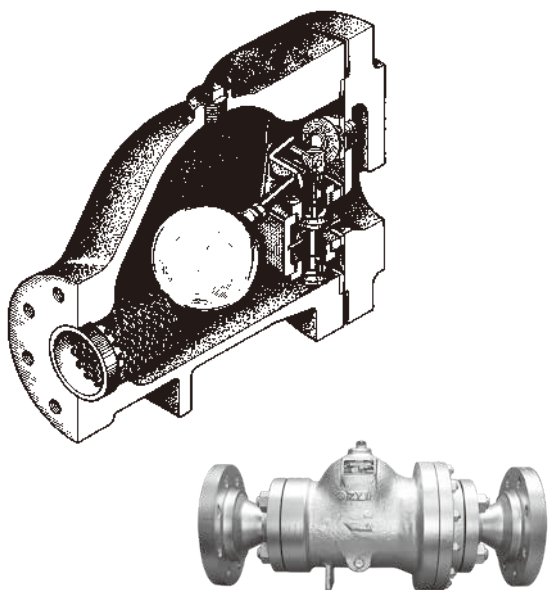

Dimensions **G3N-R, G5-R, GH3N-R, GH5-R**

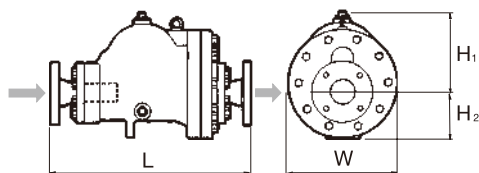

Capacity Chart

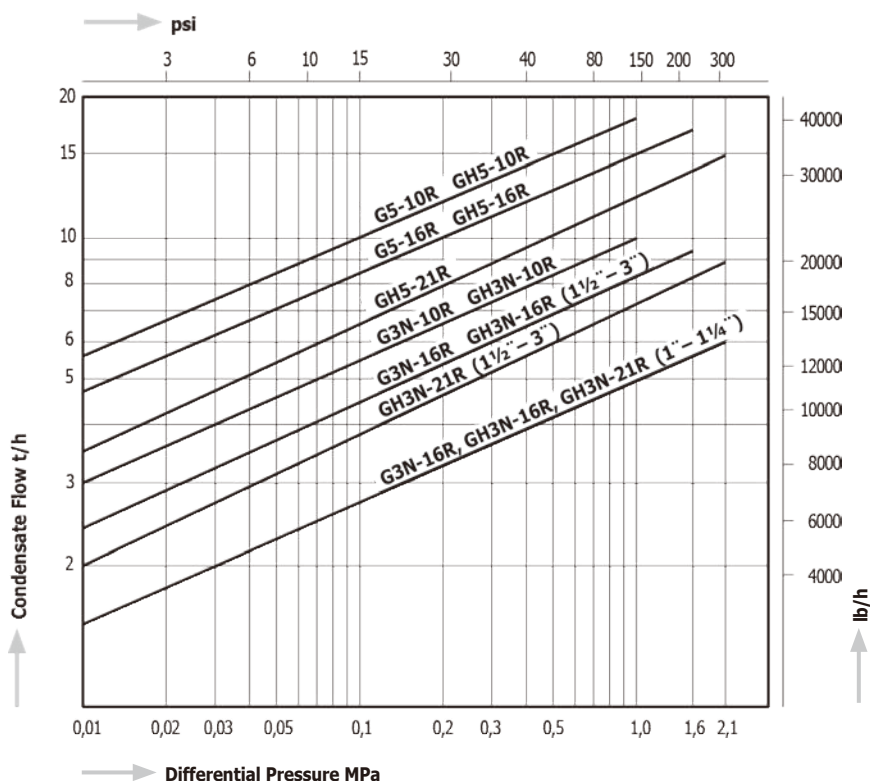


Table 1: Dimensions (ASME and DIN)

| Model | Flange Standards | | Size | L (mm) | L (in) | |
|--------|------------------|-------------------------|-------------|-------------|--------|------|
| G3N-R | DIN PN16 | ASME 150 lb / 300 lb RF | DN25 - DN40 | 1" - 1 1/4" | 437 | 17.2 |
| | | | DN50 | 2" | 467 | 18.4 |
| | | | DN60, DN80 | 2 1/2", 3" | 497 | 19.6 |
| GH3N-R | DIN PN40 | ASME 150 lb / 300 lb RF | DN25, DN32 | 1", 1 1/4" | 457 | 18.0 |
| | | | DN40 | 1 1/2" | 477 | 18.8 |
| | | | DN50 | 2" | 487 | 19.2 |
| | | | DN65, DN80 | 2 1/2", 3" | 517 | 20.4 |

| Model | Flange Standards | | Size | L (mm) | L (in) | |
|-------|------------------|-------------------------|------------|------------|--------|------|
| G5-R | DIN PN16 | ASME 150 lb / 300 lb RF | DN50 | 2" | 540 | 21.3 |
| | | | DN65, DN80 | 2 1/2", 3" | 570 | 22.4 |
| | | | DN100 | 4" | 600 | 23.6 |
| GH5-R | DIN PN40 | ASME 150 lb / 300 lb RF | DN50 | 2" | 550 | 21.7 |
| | | | DN65, DN80 | 2 1/2", 3" | 580 | 22.8 |
| | | | DN100 | 4" | 620 | 24.4 |


| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | Body Material | Weight | | | | | | | | | | |
|-------------------|----------------|-------------|-------------------------|------|----------------------------|-----|-----------------|-----|----|-----|-----------------|-----|-----|---------------------------|--------------|--------------|-----|-----|-----|-----|-----|-----|----------------------|--------------|---------------|
| | | | MPa | psig | °C | °F | L | H1 | H2 | W | H1 | H2 | W | | kg | lb | | | | | | | | | |
| G3N - 10R | Flanged | 1 1/2" - 3" | 1,0 | 145 | 235 | 455 | Table 1 (*1) | 140 | 95 | 198 | 5.5 | 3.7 | 7.8 | Ductile Cast Iron FCD 450 | 28 - 31 (*2) | 62 - 68 (*2) | | | | | | | | | |
| | | 1" - 3" | 1,6 | 230 | | | | | | | | | | | | | | | | | | | | | |
| G5 - 10R | JIS, ASME, DIN | 2" - 4" | 1,0 | 145 | | | | | | | | | | | | | | | | | | | | | |
| | | 2" - 4" | 1,6 | 230 | | | | | | | | | | | | | | | | | | | | | |
| GH3N - 16R | JIS, ASME, DIN | 1 1/2" - 3" | 1,0 | 145 | 400 | 752 | | | | | | | | | | | 139 | 106 | 212 | 5.5 | 4.2 | 8.3 | Cast Steel SCPH2/WCB | 38 - 50 (*2) | 84 - 110 (*2) |
| | | 1" - 3" | 1,6 | 230 | | | | | | | | | | | | | | | | | | | | | |
| GH3N - 21R | JIS, ASME, DIN | 1" - 3" | 2,1 | 305 | | | | | | | | | | | | | | | | | | | | | |
| | | 2" - 4" | 1,0 | 145 | | | | | | | | | | | | | | | | | | | | | |
| GH5 - 16R | JIS, ASME, DIN | 2" - 4" | 1,6 | 230 | | | | | | | | | | | | | | | | | | | | | |
| | | 2" - 4" | 2,1 | 305 | | | | | | | | | | | | | | | | | | | | | |
| GH5 - 21R | JIS, ASME, DIN | 2" - 4" | 1,6 | 230 | | | | | | | | | | | | | | | | | | | | | |
| | | 2" - 4" | 2,1 | 305 | | | | | | | | | | | | | | | | | | | | | |

(*1) Please look at our technical drawings for JIS dimensions.

(*2) Depending on size and flange standard the weight of the traps differs. Please, look at our technical drawings.


Stainless Steel as body material for GH3N and GH5 is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.

GC1N

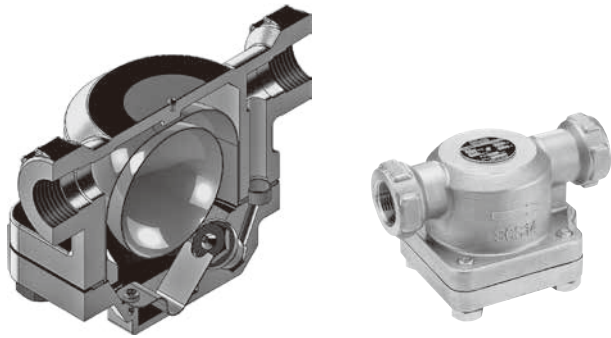

Horizontal installation


GC1V

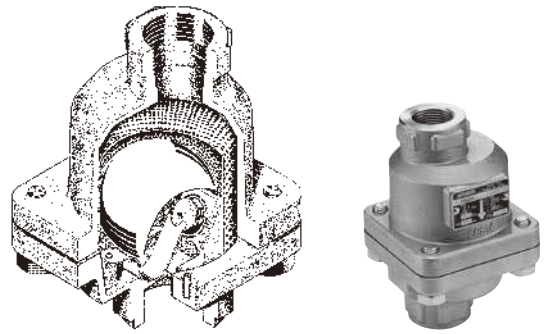

Vertical installation




Dimensions

Screwed, Socket Weld




GC1N

Flanged




GC1V


Screwed, Socket Weld



Flanged



Capacity Chart GC1N / GC1V

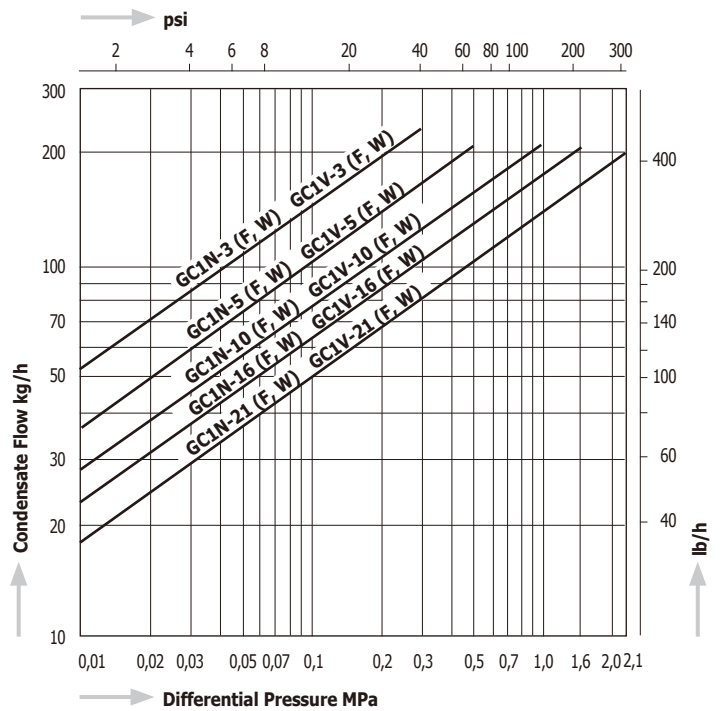


Available pressure ranges GC1N / GC1V


| Model | Max. Operating Pressure | |
|-------------------------|-------------------------|------|
| | MPa | psig |
| GC1N / GC1V - 21 | 2,1 | 305 |
| GC1N / GC1V - 16 | 1,6 | 230 |
| GC1N / GC1V - 10 | 1,0 | 145 |
| GC1N / GC1V - 5 | 0,5 | 72.5 |
| GC1N / GC1V - 3 | 0,3 | 43.5 |

| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|------------------------|----------------------------|------|-------------------------|------|----------------------------|-----|-----------------|----|----|----|-----------------|-----|-----|-----|----------------------------|--------|------|
| | | | MPa | psig | °C | °F | L | H1 | H2 | W | L | H1 | H2 | W | | kg | lb |
| GC1N (GC1V) | Screwed Rc, NPT | 1/2" | 2,1 | 305 | 350 | 662 | 127 | 15 | 75 | 86 | 5.0 | 0.6 | 3.0 | 3.4 | Stainless Steel SCS13A/CF8 | 1,8 | 4.0 |
| | | 3/4" | | | | | 136 | | | | 5.4 | | | | | 1,9 | 4.2 |
| | | 1" | | | | | 140 | | | | 5.5 | | | | | 2,0 | 4.4 |
| GC1N-W (GC1V-W) | Socket Weld JIS, ASME, DIN | 1/2" | 2,1 | 305 | 350 | 662 | 127 | 15 | 75 | 86 | 5.0 | 0.6 | 3.0 | 3.4 | Stainless Steel SCS13A/CF8 | 1,8 | 4.0 |
| | | 3/4" | | | | | 136 | | | | 5.4 | | | | | 1,9 | 4.2 |
| | | 1" | | | | | 140 | | | | 5.5 | | | | | 2,0 | 4.4 |
| GC1N-F (GC1V-F) | Flanged JIS, ASME, DIN | 1/2" | 2,1 | 305 | 350 | 662 | 175 | 15 | 75 | 86 | 6.9 | 0.6 | 3.0 | 3.4 | Stainless Steel SCS13A/CF8 | 3,3 | 7.3 |
| | | 3/4" | | | | | 195 | | | | 7.7 | | | | | 4,5 | 9.9 |
| | | 1" | | | | | 215 | | | | 8.5 | | | | | 5,3 | 11.7 |


GH40

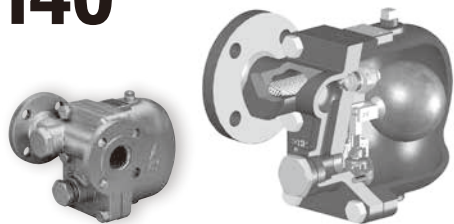


GH50

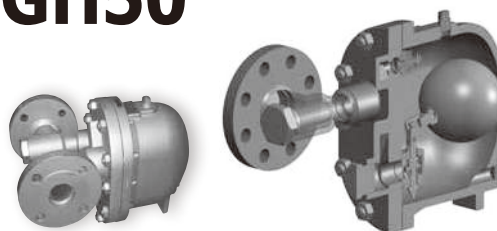

Capacity Chart GH40


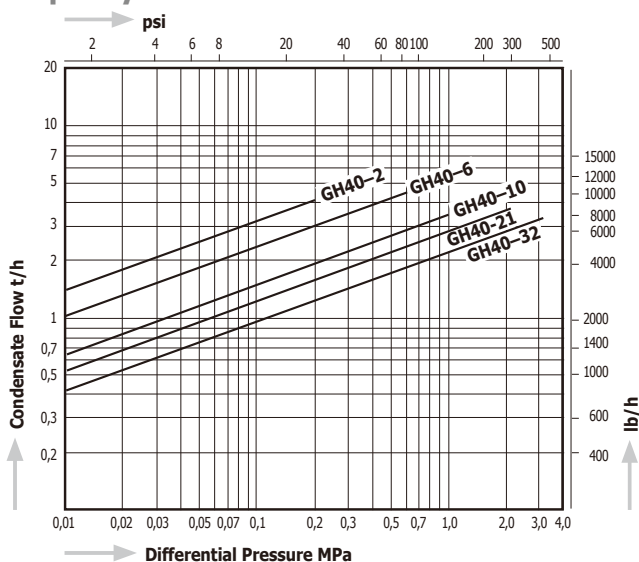


Capacity Chart GH50


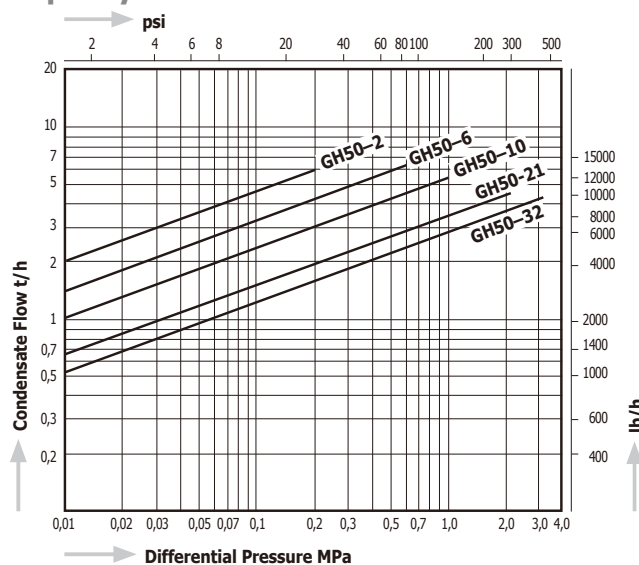


Dimensions



GH40-F



GH40-W



GH50-F



GH50-W





Table 1: Dimensions L and Weight

| Model | Size | JIS 10K, 16K, 20K | | | | JIS 30K | | | | JIS 40K | | | | ASME 150lb, 300lb | | | | ASME 600lb | | | | DIN PN40 | | | |
|----------|------|-------------------|-----|----|----|---------|-----|----|------|---------|------|----|------|-------------------|-----|----|----|------------|------|----|------|----------|-----|----|----|
| | | mm | in | kg | lb | mm | in | kg | lb | mm | in | kg | lb | mm | in | kg | lb | mm | in | kg | lb | mm | in | kg | lb |
| GH40 - F | 1½" | 230 | 9.1 | 24 | 53 | 230 | 9.1 | 27 | 60 | 240 | 9.5 | 27 | 60 | 230 | 9.1 | 24 | 53 | 240 | 9.5 | 27 | 60 | 230 | 9.1 | 24 | 53 |
| | 2" | | | | | | | | | | | | | | | | | | | | | | | | |
| GH50 - F | 1½" | 230 | 9.1 | 37 | 82 | 250 | 9.8 | 40 | 88.2 | 260 | 10.2 | 40 | 88.2 | 230 | 9.1 | 37 | 82 | 270 | 10.6 | 40 | 88.2 | 230 | 9.1 | 37 | 82 |
| | 2" | | | | | | | | | | | | | | | | | | | | | | | | |


| Model | Connections | Size | Max. Operating Pressure, PMO | | Max. Operating Temperature, TMO | | Dimensions (mm) | | | | | Dimensions (in) | | | | | Body Material | Weight | |
|----------|-------------------------------|---------|------------------------------|------|---------------------------------|-----|-----------------|------|-----|-----|-----|-----------------|-----|------|-----|------|-----------------------------|---------|---------|
| | | | MPa | psig | °C | °F | L | H1 | H2 | W1 | W2 | L | H1 | H2 | W1 | W2 | | kg | lb |
| GH40 - F | Flanged JIS, ASME, DIN | 1½", 2" | 3,2 | 464 | 400 | 752 | Table 1 | 80 | 170 | 60 | 210 | Table 1 | 3.2 | 6.7 | 2.4 | 8.3 | Cast Steel SCP#2/ WCB | Table 1 | Table 1 |
| GH40 - W | Socket Weld JIS, ASME, DIN | 1½" | | | | | 250 | 80 | 170 | 60 | 210 | 9.8 | 3.2 | 6.7 | 2.4 | 8.3 | | 19 | 41.9 |
| | | 2" | | | | | 260 | 10.2 | | | | | | | | | | | |
| GH50 - F | Flanged JIS, ASME, DIN | 1½", 2" | | | | | Table 1 | 107 | 173 | 60 | 330 | Table 1 | 4.2 | 6.8 | 2.4 | 13.0 | | Table 1 | Table 1 |
| GH50 - W | Socket Weld JIS, ASME, DIN | 1½" | 250 | 107 | 173 | 60 | 330 | 9.8 | 4.2 | 6.8 | 2.4 | 13.0 | 32 | 70.6 | | | | | |
| | | 2" | 260 | 10.2 | | | | | | | | | | | | | | | |

| Available pressure ranges | Max. Operating Pressure (PMO) | | | | | | | | | | | |
|---------------------------|--------------------------------------|----|--------------------------------------|----|--|-----|--|-----|--|-----|------|--|
| | MPa | | psig | | MPa | | psig | | MPa | | psig | |
| | 0,2 | 29 | 0,6 | 87 | 1,0 | 145 | 2,1 | 305 | 3,2 | 464 | | |
| Models | GH40-2F, GH40-2W GH50-2F, GH50-2W | | GH40-6F, GH40-6W GH50-6F, GH50-6W | | GH40-10F, GH40-10W GH50-10F, GH50-10W | | GH40-21F, GH40-21W GH50-21F, GH50-21W | | GH40-32F, GH40-32W GH50-32F, GH50-32W | | | |


Depending on the flange standard the dimensions and the weight may differ.

Stainless Steel as body material is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.


GH60

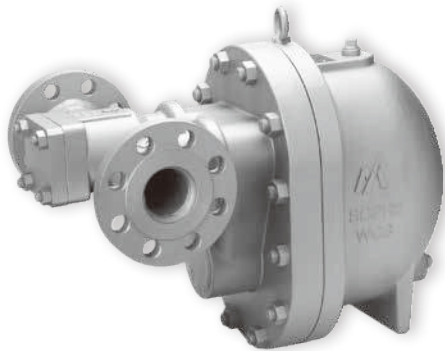


GH70

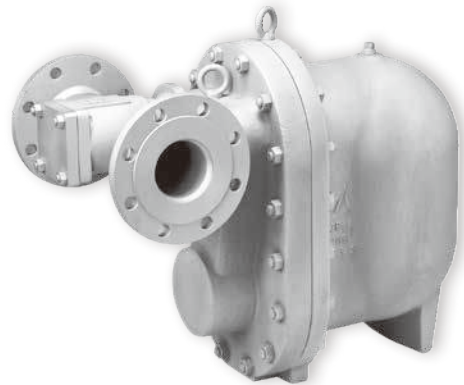


Capacity Chart GH60

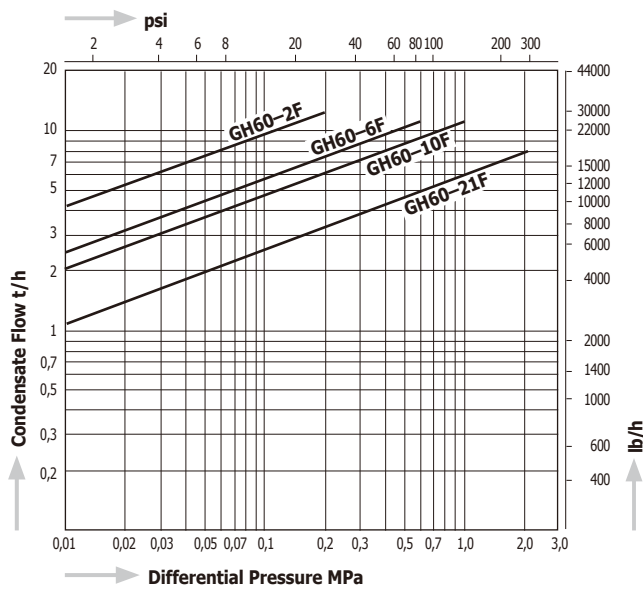


Capacity Chart GH70

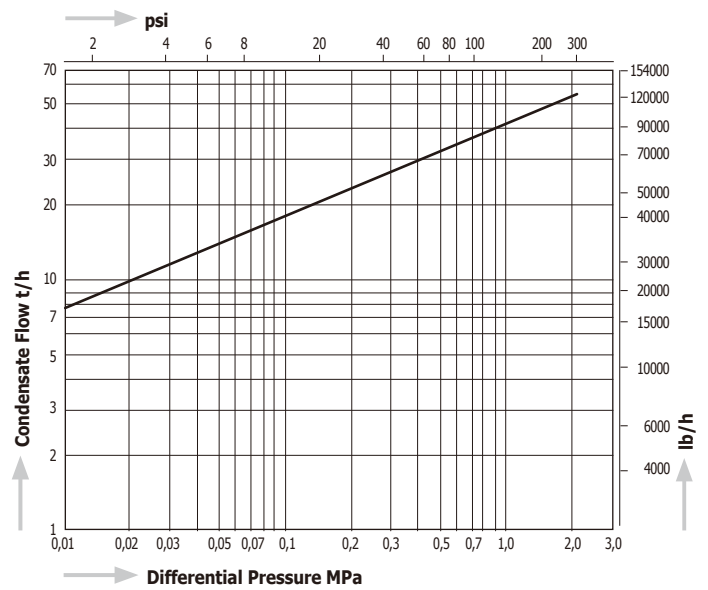

Dimensions GH60

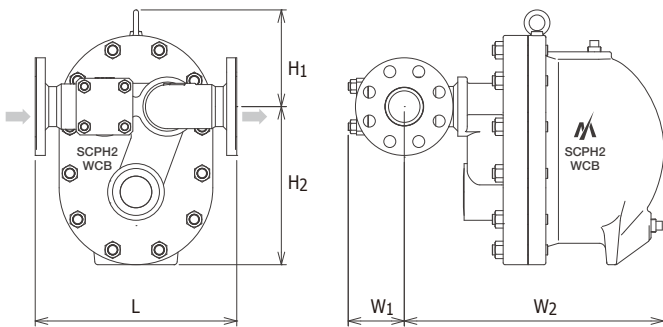


Dimensions GH70

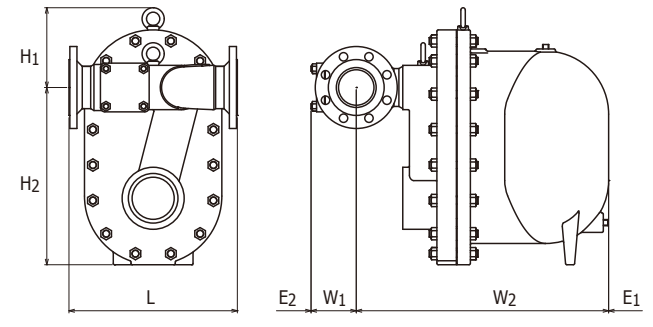


| Model | Connect. | Size | Max. Operating Pressure | | Max. Differential Pressure, PMX | | Max. Operating Temperature, TMO | | Dimensions (mm) | | | | | | | | Dimensions (in) | | | | | | Body Material | Weight | |
|----------|---------------------------------|----------|-------------------------|------|---------------------------------|------|---------------------------------|-----|-----------------|-----|-----|-----|-----|-----|-----|------|-----------------|------|-----|------|------|-----|-----------------------------|--------|-------|
| | | | MPa | psig | MPa | psig | °C | °F | L | H1 | H2 | W1 | W2 | E1 | E2 | L | H1 | H2 | W1 | W2 | E1 | E2 | | kg | lb |
| GH60-2F | Flanged JIS, ASME, DIN | 2" - 2½" | 0,2 | 29 | 0,2 | 29 | 400 | 752 | 320 | 155 | 250 | 90 | 410 | - | - | 12.6 | 6.1 | 9.8 | 3.5 | 16.1 | - | - | Cast Steel SCPH2/ WCB | 75 | 165.4 |
| GH60-6F | | | 0,6 | 87 | 0,6 | 87 | | | | | | | | | | | | | | | | | | | |
| GH60-10F | | | 1,0 | 145 | 1,0 | 145 | | | | | | | | | | | | | | | | | | | |
| GH60-21F | | | 2,1 | 305 | 2,1 | 305 | | | | | | | | | | | | | | | | | | | |
| GH70-21F | Flanged JIS, ASME, DIN | 3" | 2,1 | 305 | 2,1 | 305 | 400 | 752 | 380 | 180 | 400 | 105 | 570 | 330 | 120 | 15.0 | 7.1 | 15.8 | 4.1 | 22.4 | 13.0 | 4.7 | 172 | 379.3 | |
| | | 4" | | | | | | | | | | | | | | | | | | | | | | | |

Stainless Steel as body material is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.

GTH12

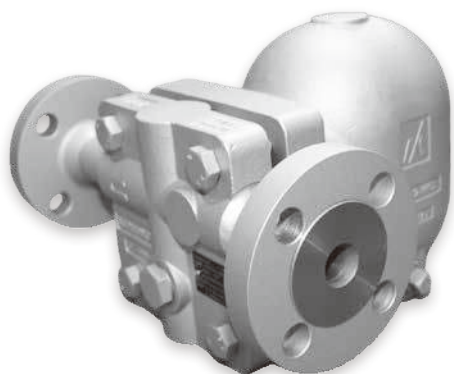


Capacity Chart GTH12

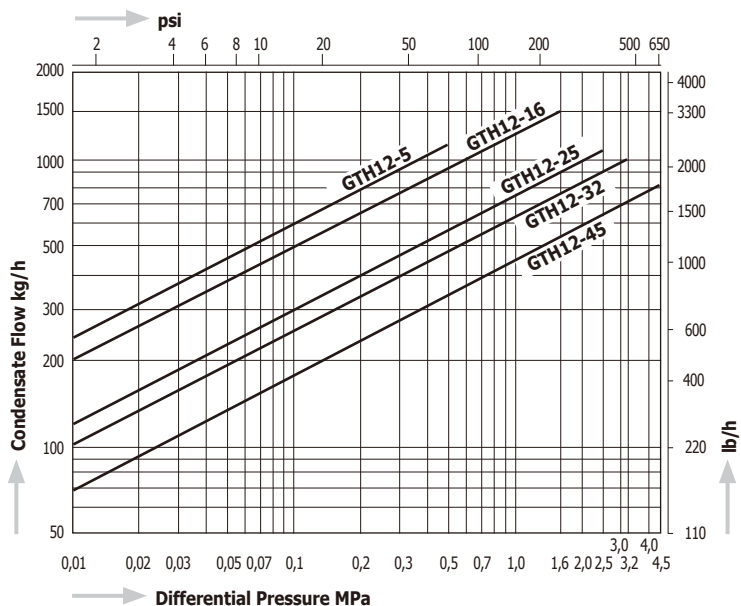


Dimensions

GTH12-F Flanged

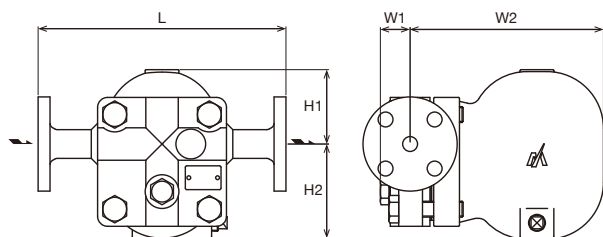

GTH12 Screwed
GTH12-W Socket Weld

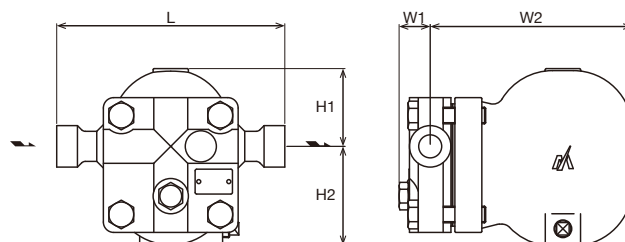

| Model | Connections | Size | Max. Operating Pressure | | Max. Differential Pressure, PMX | | Max. Operating Temperature, TMO | | Dimensions (mm) | | | Dimensions (in) | | | Body Material | Weight | |
|------------|-------------------------------|---------|-------------------------|-------|---------------------------------|------|---------------------------------|-------|-----------------|----|----|-----------------|-----|-----|-------------------------|--------|-------|
| | | | MPa | psig | MPa | psig | °C | °F | L | H1 | H2 | L | H1 | H2 | | kg | lb |
| GTH12- 5 | Screwed RC, NPT | ½" - 1" | 3,2 * | 464 * | 0,5 | 73 | 400 * | 752 * | 220 | 75 | 95 | 8.7 | 3.0 | 3.7 | Cast Steel SCPH2/WCB | ~11,7 | ~25.8 |
| GTH12- 16 | | | | | 1,6 | 230 | | | | | | | | | | | |
| GTH12- 25 | | | | | 2,5 | 363 | | | | | | | | | | | |
| GTH12- 32 | | | | | 3,2 | 464 | | | | | | | | | | | |
| GTH12- 45 | | | 5,0 | 725 | 4,5 | 652 | 425 | 800 | | | | | | | | | |
| GTH12- 5F | Flanged JIS, ASME, DIN | ½" - 1" | 3,2 * | 464 * | 0,5 | 73 | 400 * | 752 * | 250 | 75 | 95 | 9.8 | 3.0 | 3.7 | | ~15,2 | ~33.5 |
| GTH12- 16F | | | | | 1,6 | 230 | | | | | | | | | | | |
| GTH12- 25F | | | | | 2,5 | 360 | | | | | | | | | | | |
| GTH12- 32F | | | | | 3,2 | 464 | | | | | | | | | | | |
| GTH12- 45F | | | 5,0 | 725 | 4,5 | 652 | 425 | 800 | | | | | | | | | |
| GTH12- 5W | Socket Weld JIS, ASME, DIN | ½" - 1" | 3,2 * | 464 * | 0,5 | 73 | 400 * | 752 * | 220 | 75 | 95 | 8.7 | 3.0 | 3.7 | ~11,7 | ~25.8 | |
| GTH12- 16W | | | | | 1,6 | 230 | | | | | | | | | | | |
| GTH12- 25W | | | | | 2,5 | 360 | | | | | | | | | | | |
| GTH12- 32W | | | | | 3,2 | 464 | | | | | | | | | | | |
| GTH12- 45W | | | 5,0 | 725 | 4,5 | 652 | 425 | 800 | | | | | | | | | |


*PMO 5,0 MPa and TMO 425 °C is available as special design.

A vertical version and Stainless Steel as body material are available as special design.

For more details, please contact MIYAWAKI Inc. or an authorized representative.


GWH70

Capacity Chart GWH70

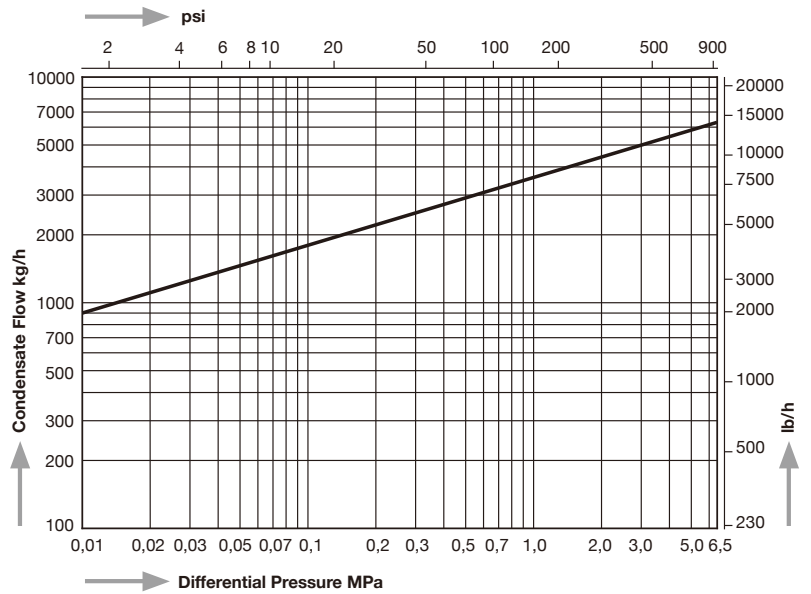


Dimensions


GWH70-W Socket Weld

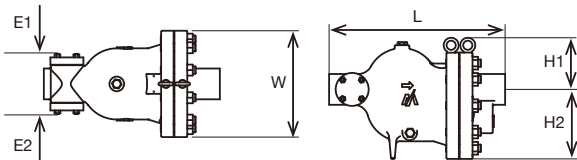

GWH70-BW Butt Weld

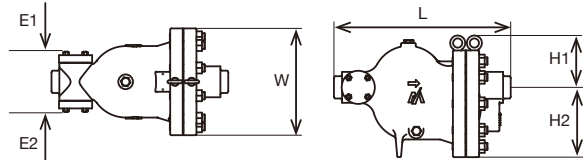


GWH70-F Flanged

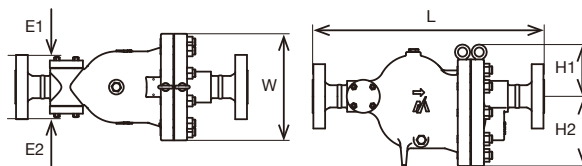

| Model | Connections | Size | Max. Operating Pressure | | Max. Differential Pressure, PMX | | Max. Operating Temperature, TMO | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|------------------|-----------------------------|------|-------------------------|------------------|---------------------------------|------|---------------------------------|-------------------|-----------------|-----|-----|-----|-----------------|-----|-----|------|------------------------|--------|------|
| | | | MPa | psig | MPa | psig | °C | °F | L | H1 | H2 | W | L | H1 | H2 | W | | kg | lb |
| GWH70- W | Socket Weld JIS, ASME | 1½" | 6,5 at 425 °C | 943 at 797 °F | 6,5 | 943 | 425 at 6,5 MPa | 797 at 943 psi | 480 | 140 | 190 | 290 | 18.9 | 5.5 | 7.5 | 11.4 | Cast steel A216 WCB | 62 | 137 |
| | | 2" | | | | | | | | | | | | | | | | | |
| GWH70- BW | Butt Weld JIS, ASME | 1½" | | | | | | | | | | | | | | | | | |
| | | 2" | | | | | | | | | | | | | | | | | |
| GWH70- F | Flanged ASME/JPI, JIS | 1½" | | | | | | | | | | | | | | | | | |
| | | 2" | | | | | | | | | | | | | | | | 630 | 24.8 |
| GWH70- F | Flanged PN40, 63 | DN40 | | | | | | | | | | | | | | | | | |
| | | DN50 | | | | | | | | | | | | | | | | | |

GTH10

Capacity Chart GTH10

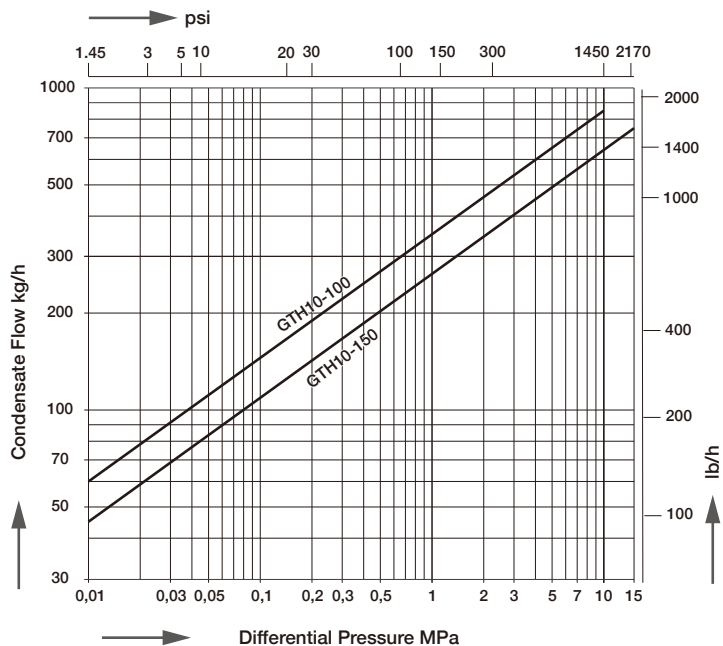


Dimensions

GTH10-W Socket Weld

GTH10-BW Butt Weld


GTH10-F Flanged

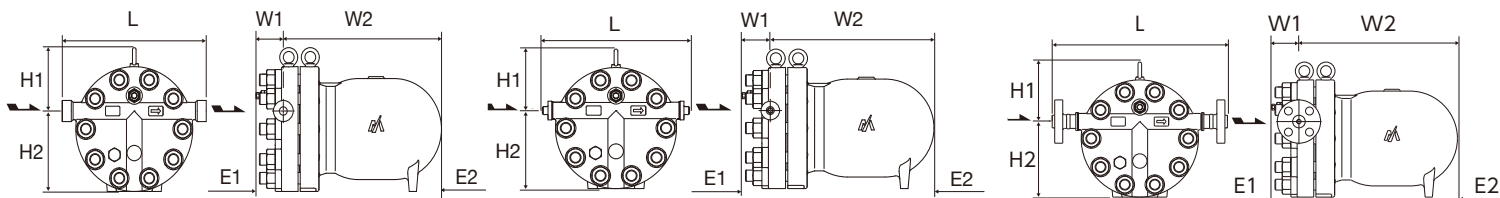


| Model | Connections | Size | Max. Operating Pressure | | Max. Differential Pressure, PMX | | Max. Operating Temperature, TMO | | Dimensions (mm) | | | | | Dimensions (in) | | | | | Body Material | Weight | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------------|----------------------------------|---------------------|-------------------------|-------------------|---------------------------------|------|---------------------------------|--------------------|--------------------|-------------------|------|------|--------------------|--------------------|-----|-----|------|----------|---------------|--------|--------------------|--------------------|-----|-----|----|-----|-----|-----|-----|------|----------|-----|-----|--------------------|------|-----|-----|----|-----|-----|-----|-----|------|----------|-----|-----|-------------------|-------------------|------|------|--------------------|--------------------|--------------------|-----|-----|----|-----|-----|-----|-----|------|----------|-----|-----|--------------------|------|-----|-----|----|-----|-----|-----|-----|------|----------|-----|-----|
| | | | MPa | psig | MPa | psig | °C | °F | L | H1 | H2 | W1 | W2 | L | H1 | H2 | W1 | W2 | | kg | lb | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GTH10- 100W | Socket Weld JIS, ASME, DIN | ½" - 1" | 10,0 at 500 °C | 1450 at 932 °F | 10,0 | 1450 | 550 at 5,18 MPa | 1022 at 751 psi | 400 | 165 | 210 | 80 | 440 | 6.5 | 8.3 | 3.1 | 17.3 | A217 WC9 | 111 | 244 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GTH10- 150W | | | 15,0 at 379 °C | 2175 at 714 °F | 15,0 | 2175 | | | | | | | | | | | | | | | 15.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GTH10- 100BW | Butt Weld JIS, ASME | ½" - 1" | 10,0 at 500 °C | 1450 at 932 °F | 10,0 | 1450 | | | 550 at 5,18 MPa | | | | | | | | | | | | 1022 at 751 psi | 395 | 165 | 210 | 80 | 440 | 6.5 | 8.3 | 3.1 | 17.3 | A217 WC9 | 111 | 244 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GTH10- 150BW | | | 15,0 at 379 °C | 2175 at 714 °F | 15,0 | 2175 | | | | | | | | | | | | | | | | | | | | | | | | | | | | 15.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GTH10- 100F | Flanged ASME/JPI | ½" | 10,0 at 500 °C | 1450 at 932 °F | 10,0 | 1450 | | | | | | | | | | | | | | | | 550 at 5,18 MPa | | | | | | | | | | | | 1022 at 751 psi | 485 | 165 | 210 | 80 | 440 | 6.5 | 8.3 | 3.1 | 17.3 | A217 WC9 | 115 | 254 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | ¾" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 495 | 19.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 1" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 505 | 19.8 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GTH10- 150F | | Flanged ASME/JPI | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | ½" | | | | | | | | | | | | 15,0 at 379 °C | 2175 at 714 °F | 15,0 | 2175 | 550 at 5,18 MPa | 1022 at 751 psi | 485 | 165 | 210 | 80 | 440 | 6.5 | 8.3 | 3.1 | 17.3 | A217 WC9 | 115 | 254 | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | ¾" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 495 | 19.5 | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 1" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 505 | 19.8 | | | | | | | | | | | |
| GTH10- 100F | Flanged PN160 | | DN15 | 10,0 at 500 °C | 1450 at 932 °F | 10,0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 1450 | | | | | | | | | | | | | | | | | | 550 at 5,18 MPa | | | | | | | | | | | | 1022 at 751 psi | 475 | 165 | 210 | 80 | 440 | 6.5 | 8.3 | 3.1 | 17.3 | A217 WC9 | 113 | 249 |
| | | | DN25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GTH10- 150F | | | Flanged PN160 | | | | DN15 | 15,0 at 379 °C | | 2175 at 714 °F | 15,0 | 2175 | 550 at 5,18 MPa | 1022 at 751 psi | 475 | 165 | 210 | 80 | 440 | 6.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 8.3 | | | | | | | | | | | |
| | | DN25 | | | | | 495 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 19.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

SERIES G Ball Float Traps


G11N/G12N





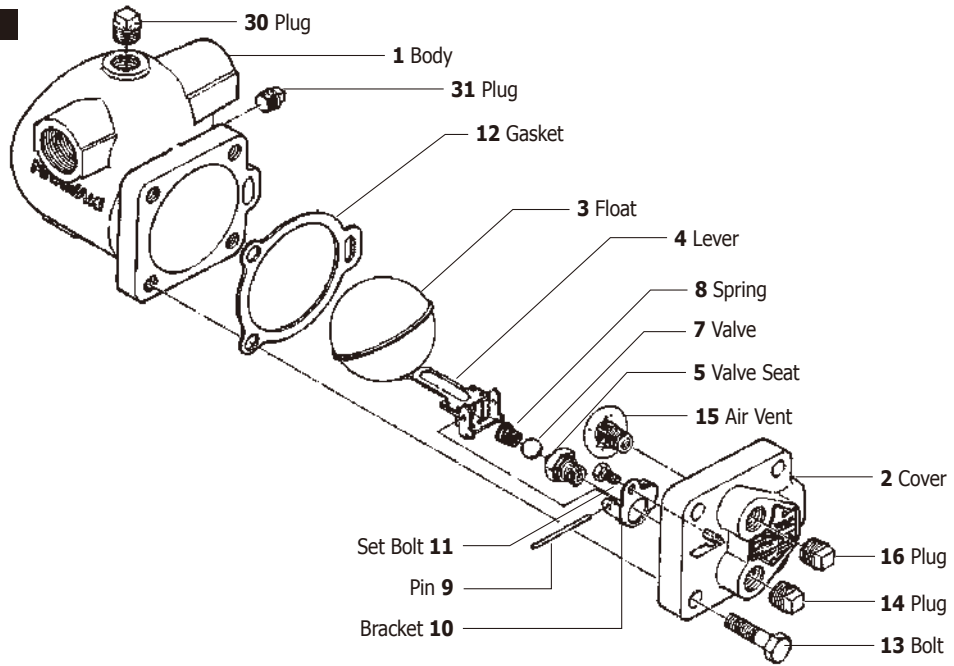


G15N

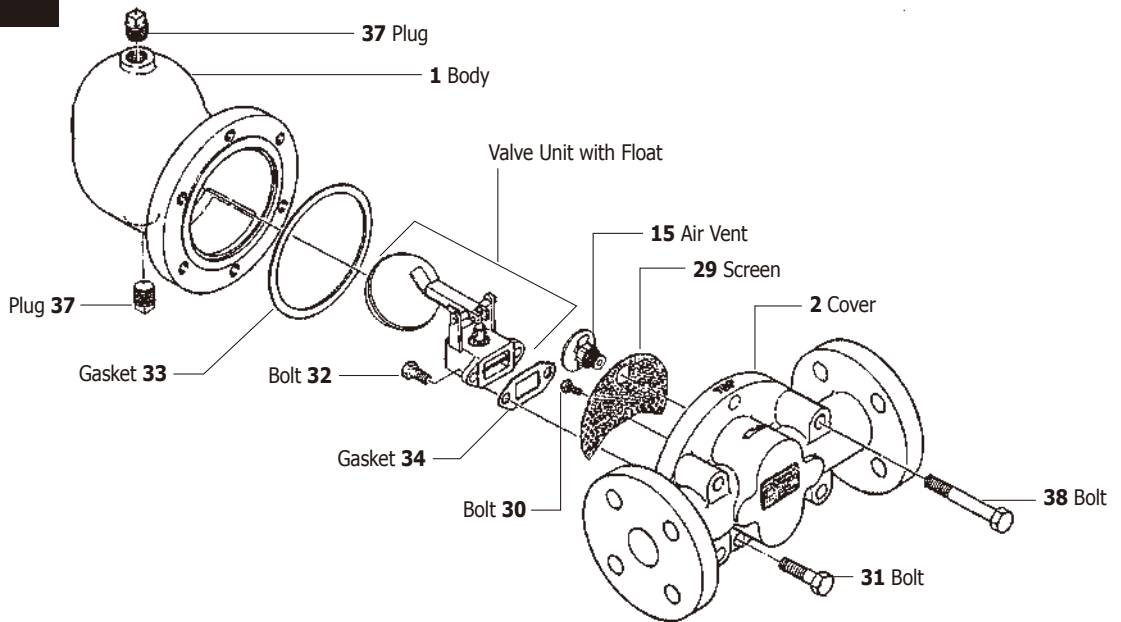


G3N, GH3N, G5, GH5

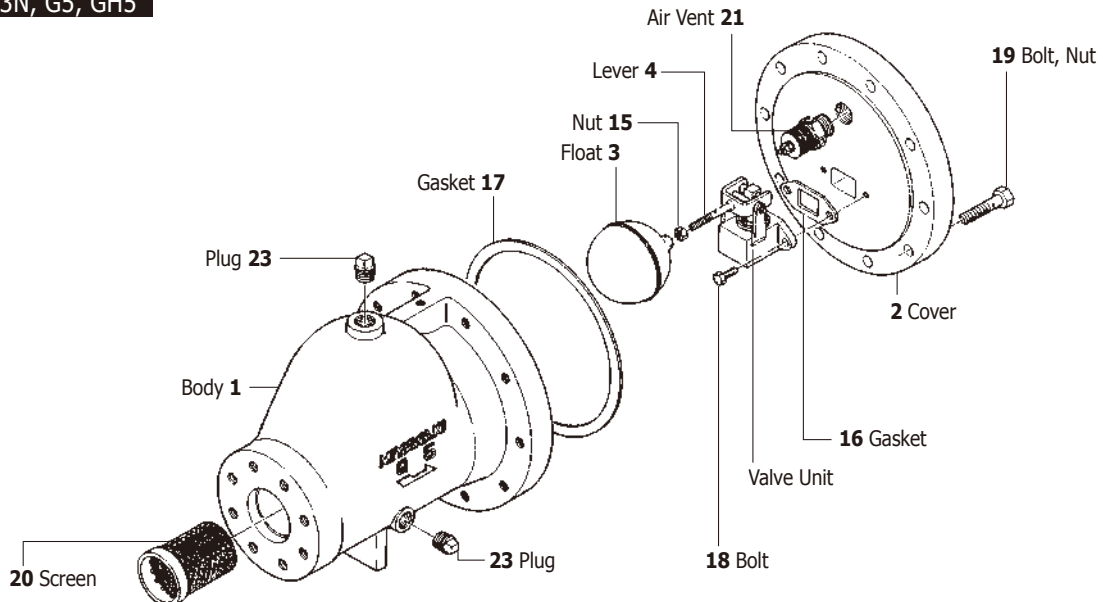

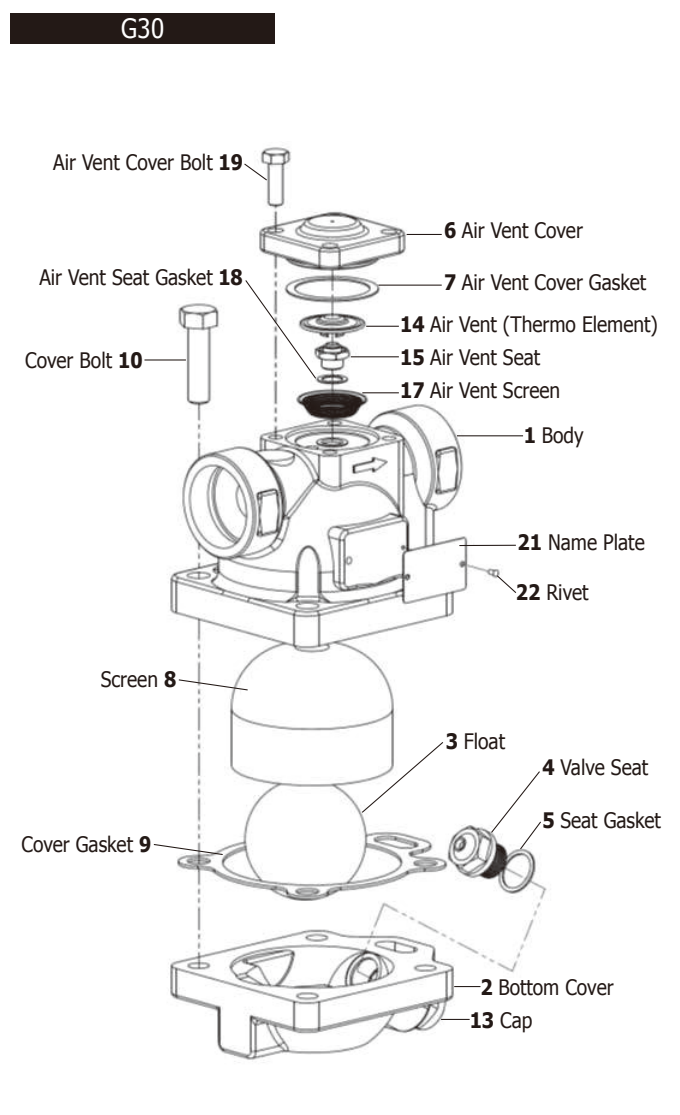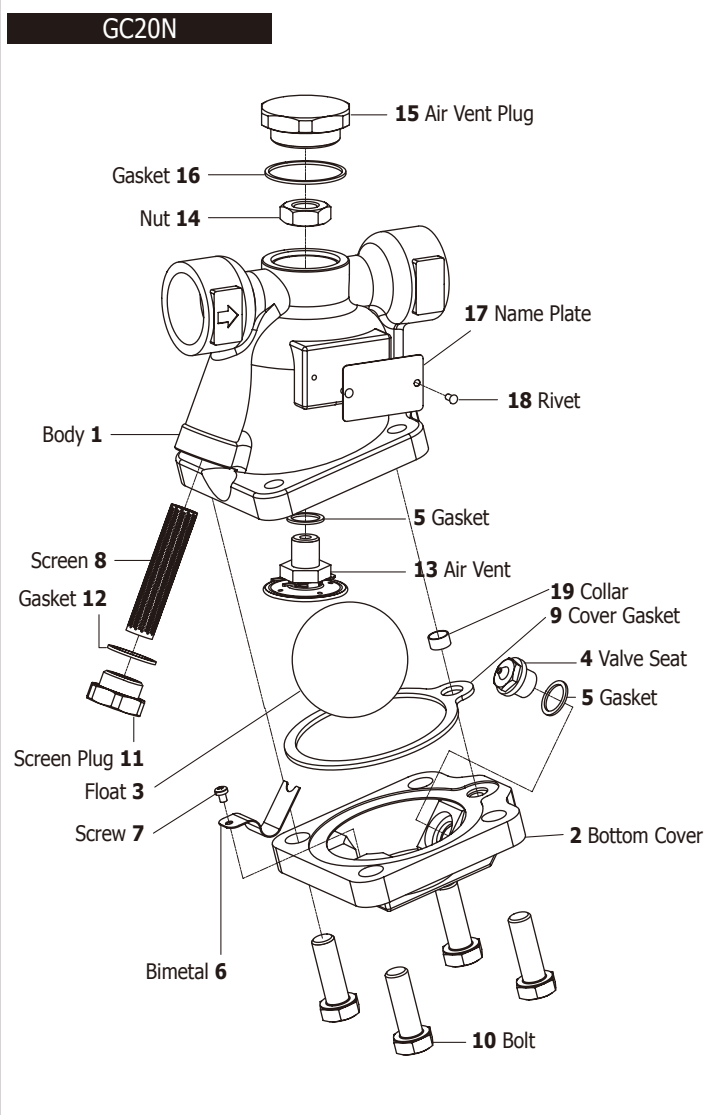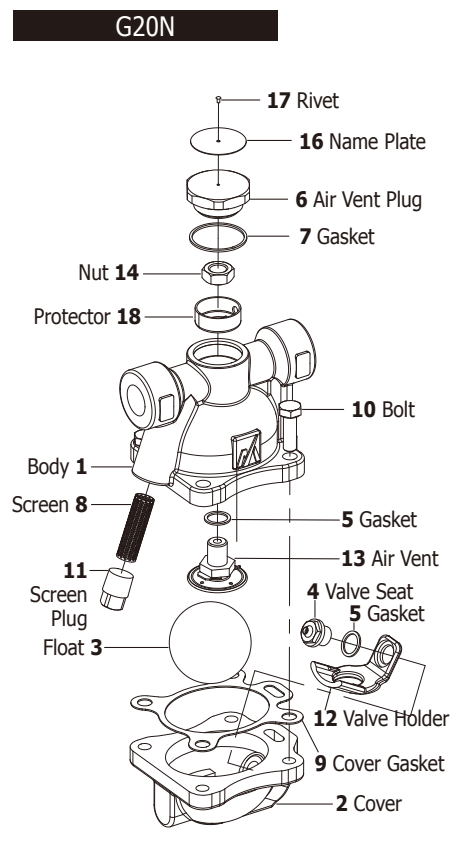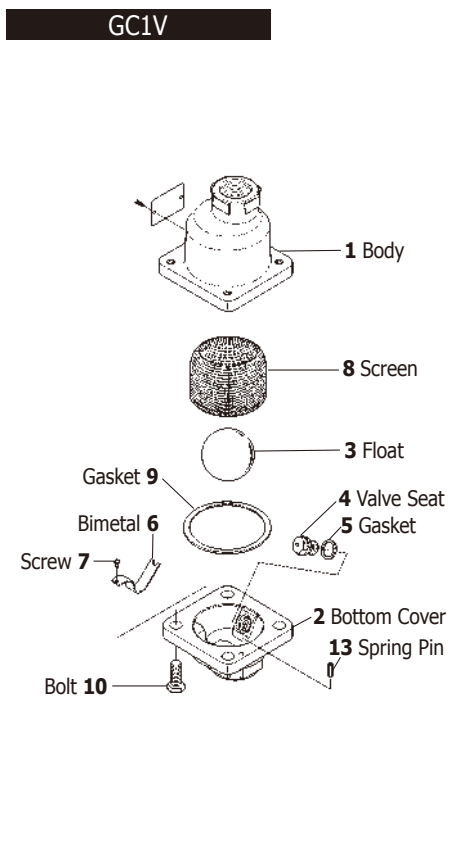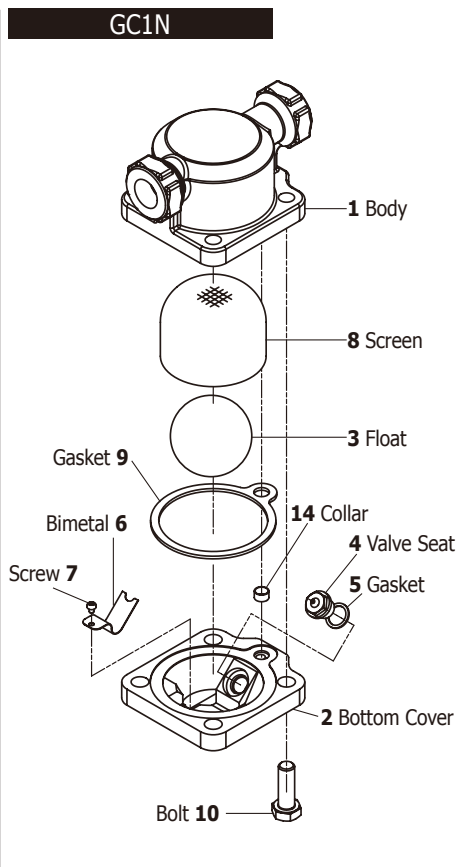


SERIES G Ball Float Traps


GH40

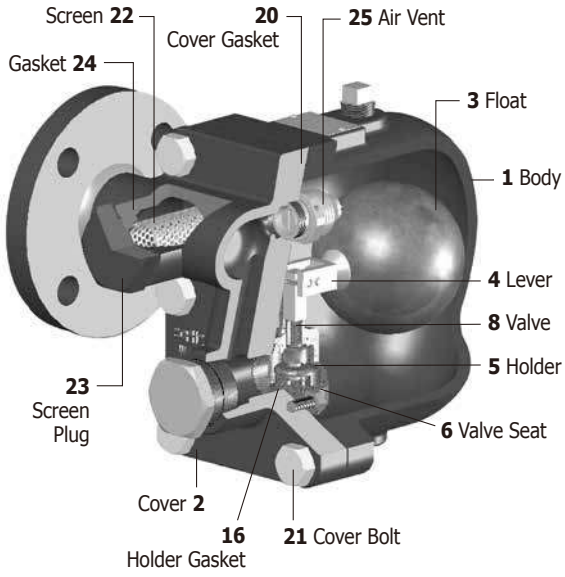


GTH12

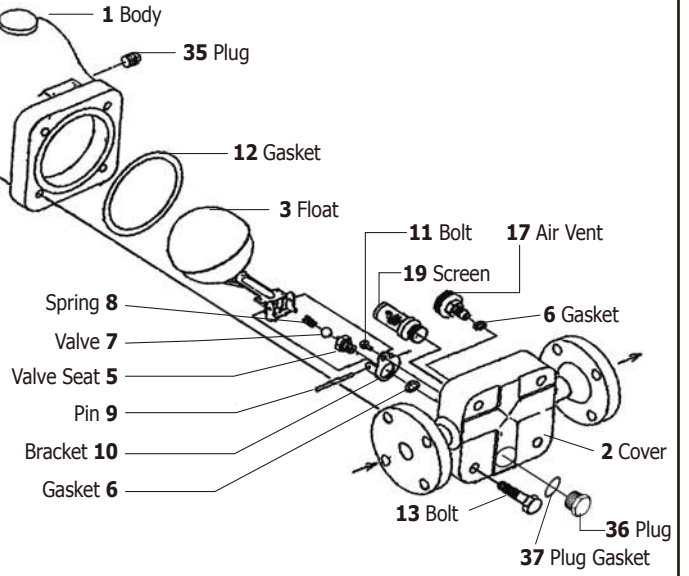


GH50

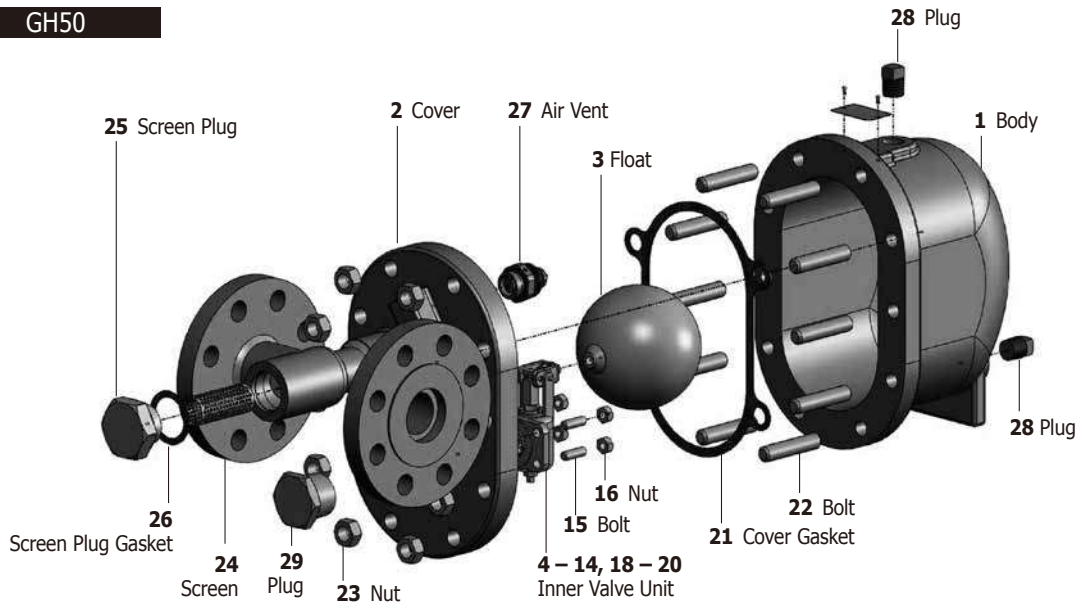


GH60

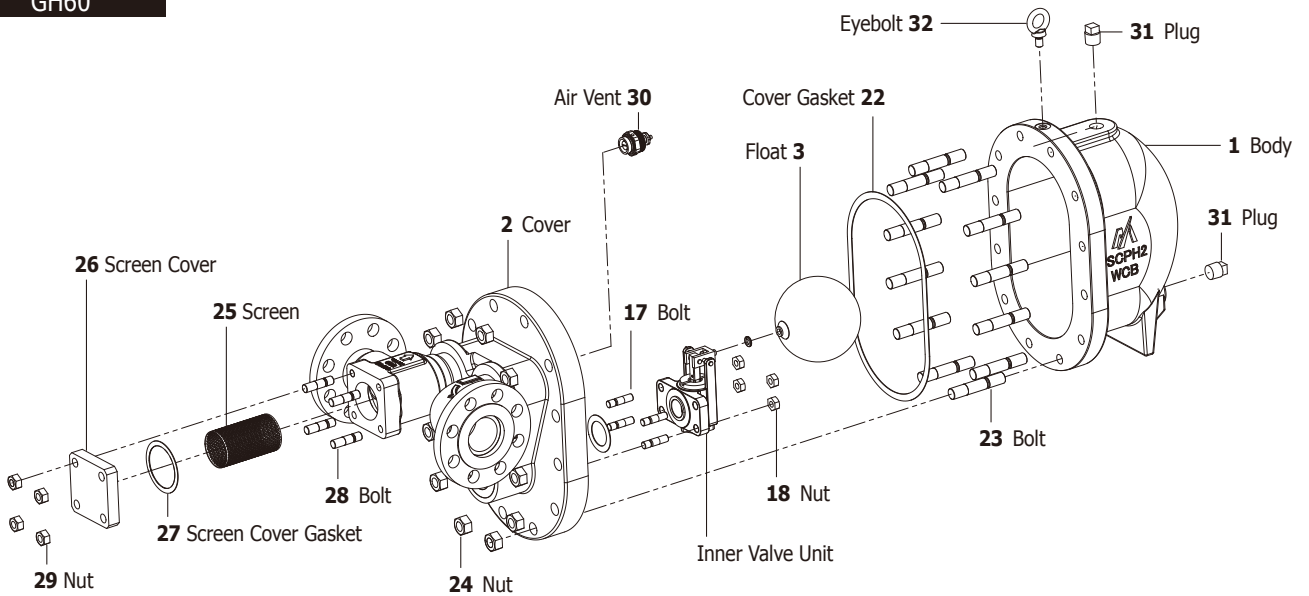


GH70

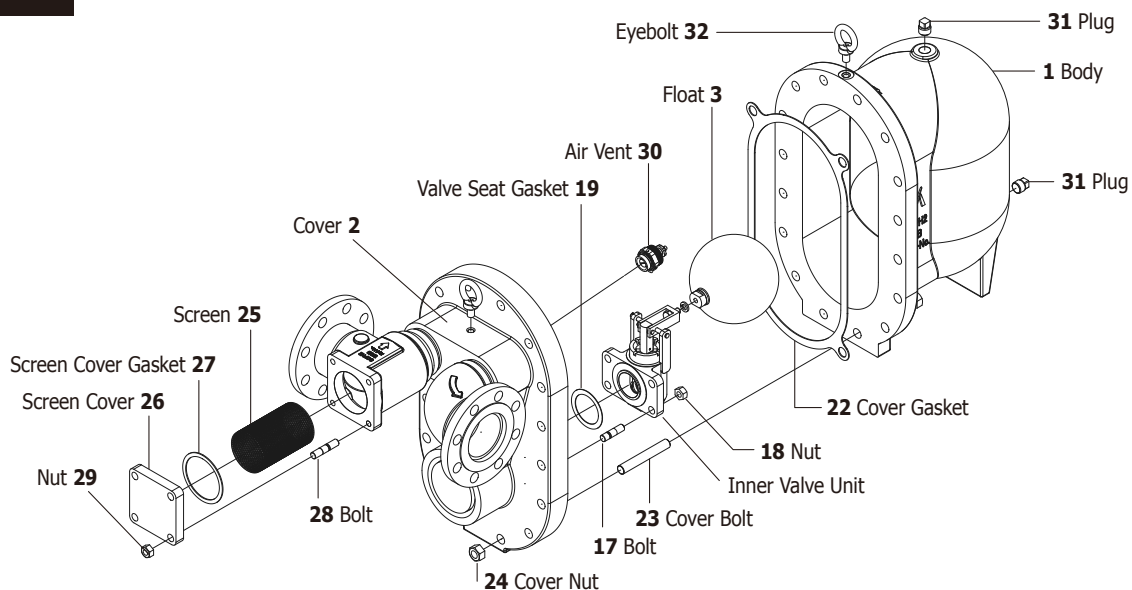

GTH10

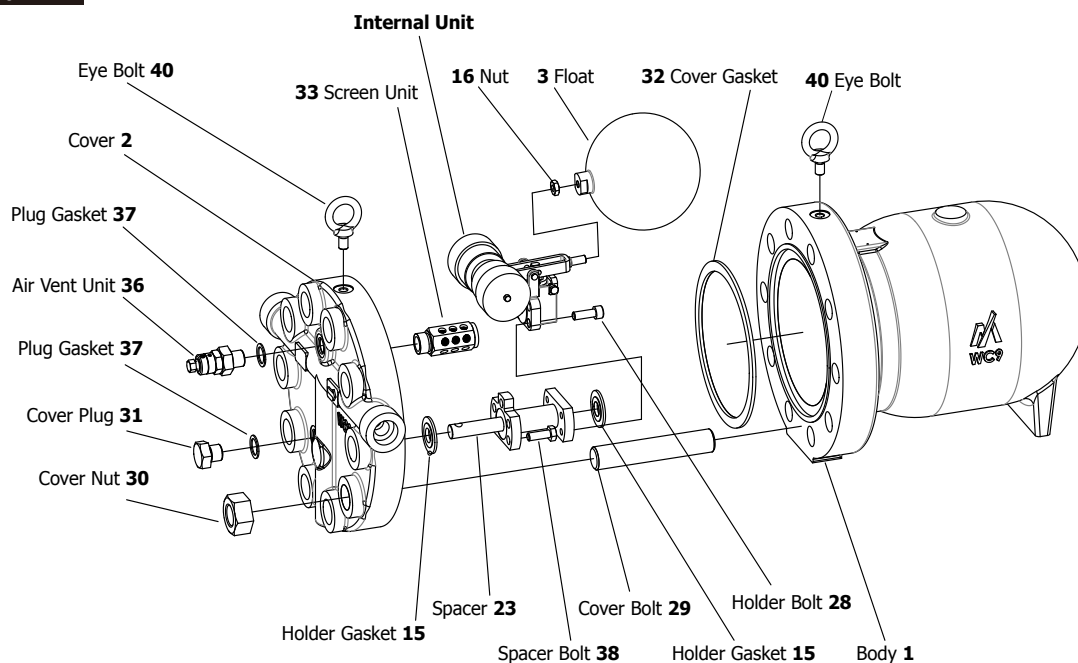

GWH70

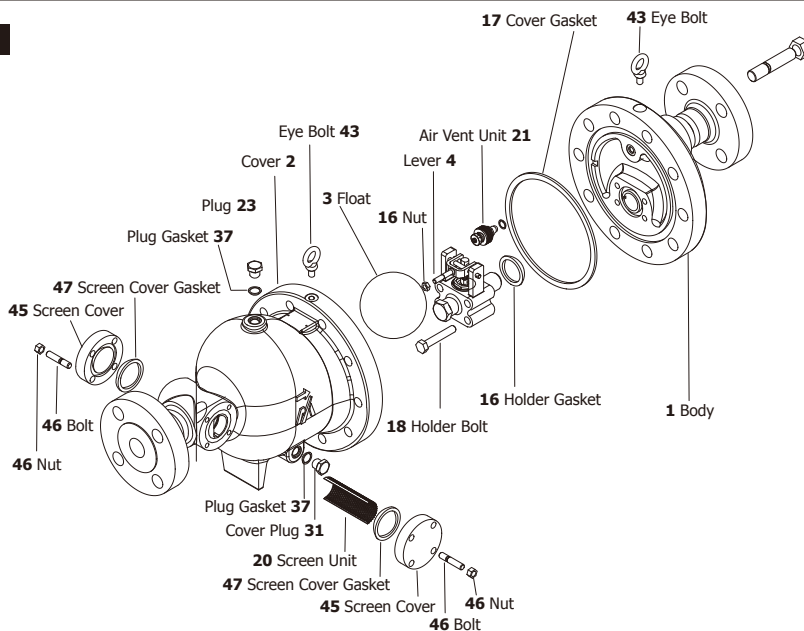

Steam Traps with Two-bolt Connection

SERIES DC1, SU2

Steam Traps with Two-bolt Connection are intended to make steam trap replacement as easy and quick as possible. It should be mostly unnecessary to remove the body from the pipeline. Steam trap maintenance and replacement are executed by unscrewing the two bolts and removing the steam trap part from the body.

Models

| | |
|----------------|---|
| DC1-21U | Balanced Pressure Thermostatic Steam Trap |
| SU2-32U | Thermodynamic Steam Trap |


Features

- Made from stainless steel
- At time of non-operation self-draining
- Can be installed both horizontally and vertically
- Easy in-line inspection and maintenance
- Lightweight, compact design

Suitable for

light to medium condensate loads: steam tracing, steam main drips, small heat exchangers, unit heaters, steam heating coils, sterilizers and many other applications in the petrochemical, chemical, textile, food, pharmaceutical, and other industries.

Installation Example

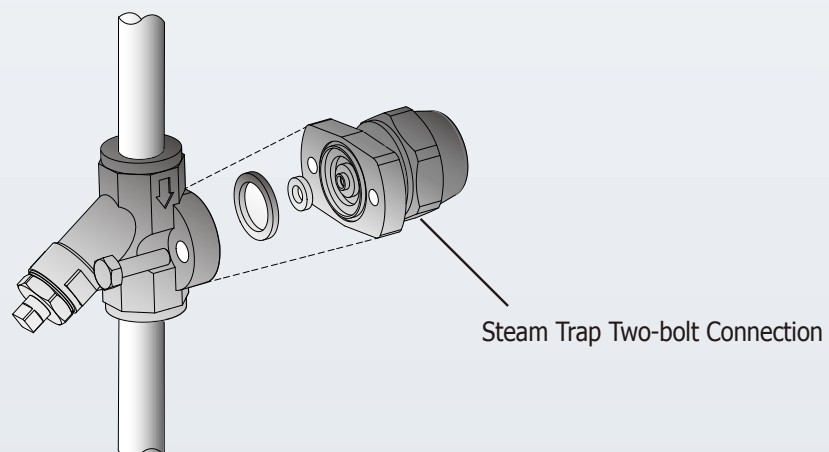

Steam Traps with Two-bolt Connection

DC1-21U

Balanced Pressure
Thermostatic Type



SU2-32U


Thermodynamic Type




All models:

With stainless steel body and stainless steel internals. For horizontal and vertical installation. Two-bolt connection for simplified replacement of the steam trap.


Capacity Chart DC1-21U

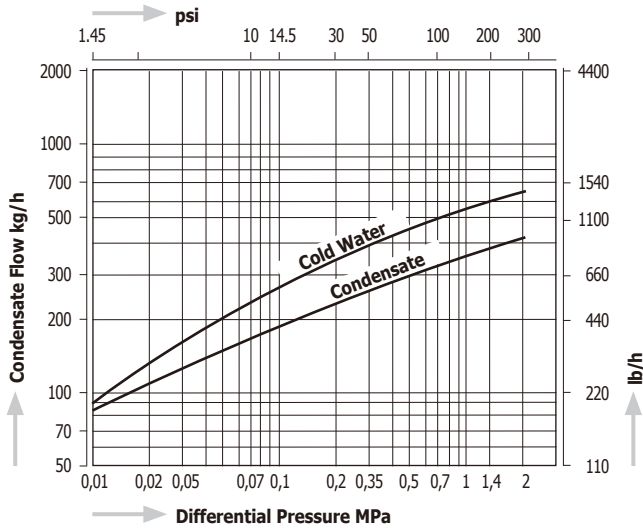


Capacity Chart SU2-32U

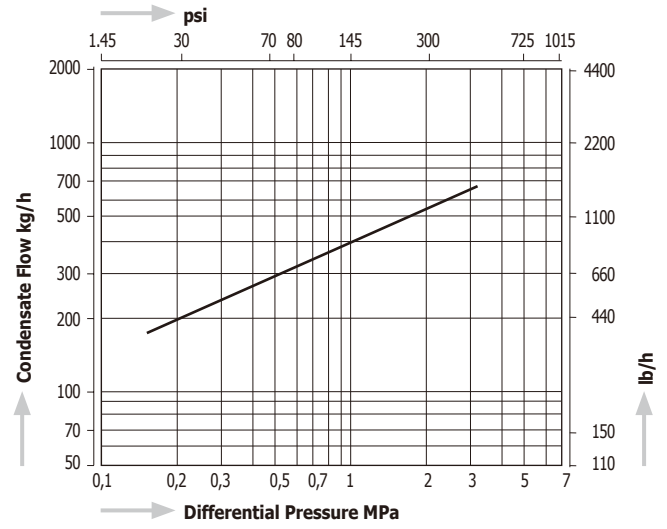

Dimensions



Dimensions



| Model | Connection | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | Dimensions (in) | | | Body Material | Weight | |
|---------|-------------------------------|-------------------------|------|----------------------------|-----|-----------------|----|----|-----------------|-----|-----|----------------------|--------|-----|
| | | MPa | psig | °C | °F | D | H | W | D | H | W | | kg | lb |
| DC1-21U | Universal Two-bolt Connection | 2,1 | 305 | 235 | 455 | 55 | 62 | 70 | 2.2 | 2.4 | 2.8 | Stainless Steel CF8M | 0,8 | 1.8 |
| SU2-32U | | 3,2 | 464 | 350 | 662 | 60 | 55 | 70 | 2.4 | 2.2 | 2.8 | | | |

Pumping Traps

SERIES GL

Pumping Traps transport low pressure condensate into a higher location / pressure line. They are used to drain condensate from process application where the pressure is not sufficient to push the condensate to the condensate return lines or to the condensate vessel. Pumping traps are utilizing steam, air or gases for operation and have no electric components which may fail.

| | | |
|---------------|----------------------|---|
| Models | GL11 | Small compact Ductile Cast Iron pumping trap for condensate recovery |
| | GL81E | Ductile Cast Iron pumping trap for the recovery of large condensate amounts |
| | GLP71, GLP81E | Carbon steel pumping trap for the recovery of large condensate amounts |


- Features**
- Can be used in hazardous areas as there is no electricity needed.
 - Work with a low filling head
 - Air/N₂ or saturated steam can be used as motive medium
 - The internal parts are manufactured of high-quality stainless steel

Applications

Condensate return from low pressure installations, condensate return to places located higher than the condensate vessel, condensate return from vacuum systems

Operating principle

condensate steam

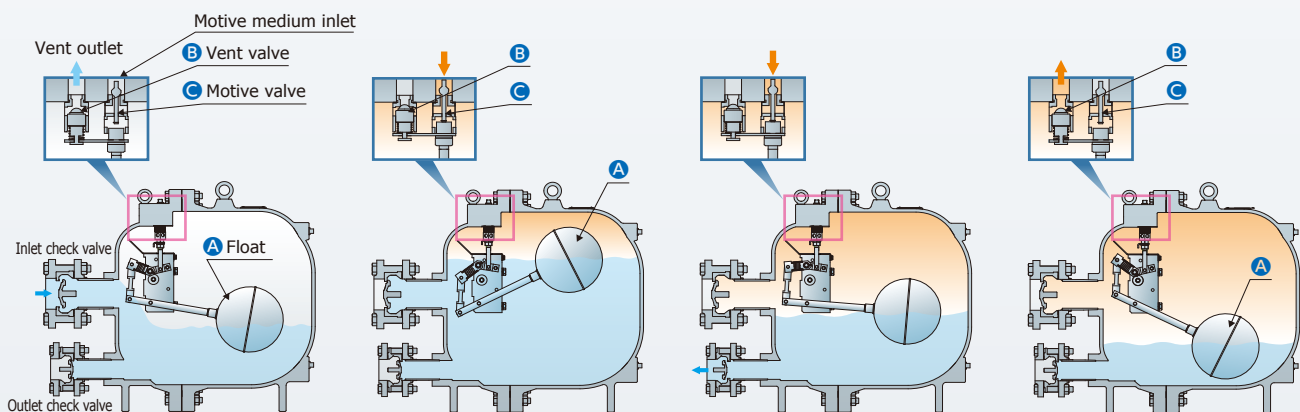

1

On startup, **A** is at the low position, and **B** is opened and **C** is closed. As condensate flows into the pumping trap through the inlet check valve, **A** rises.

2

When **A** rises to its high position, **B** is closed and **C** is opened. Then, motive medium flows into the pumping trap and the pressure in the pumping trap rises.


3

When the pressure in the pumping trap becomes higher than the outlet pressure, the outlet check valve opens and the condensate is discharged from the outlet.


4

As the condensate level in the pumping trap falls, **C** is closed and **B** is opened. The increased pressure in the pumping trap is released through **B**. When the pressure in the pumping trap falls and is equal to the inlet pressure, condensate flows into the pumping trap again and the operating cycle **1** to **4** is repeated.

GL11

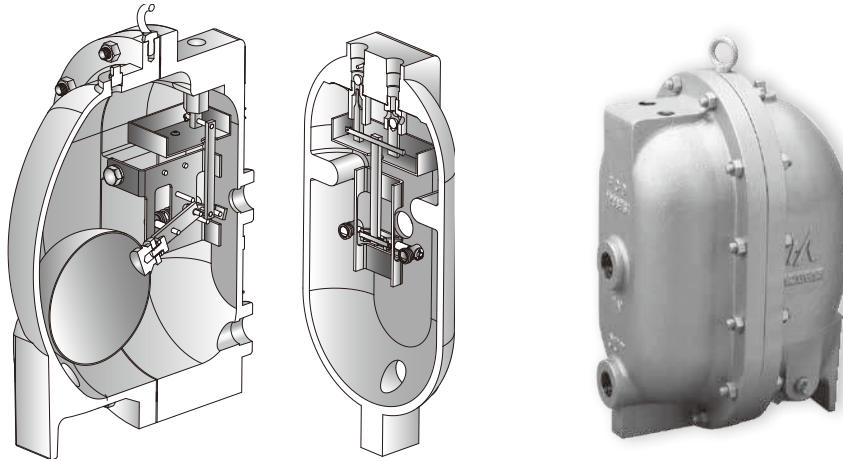

Flow Capacity Charts

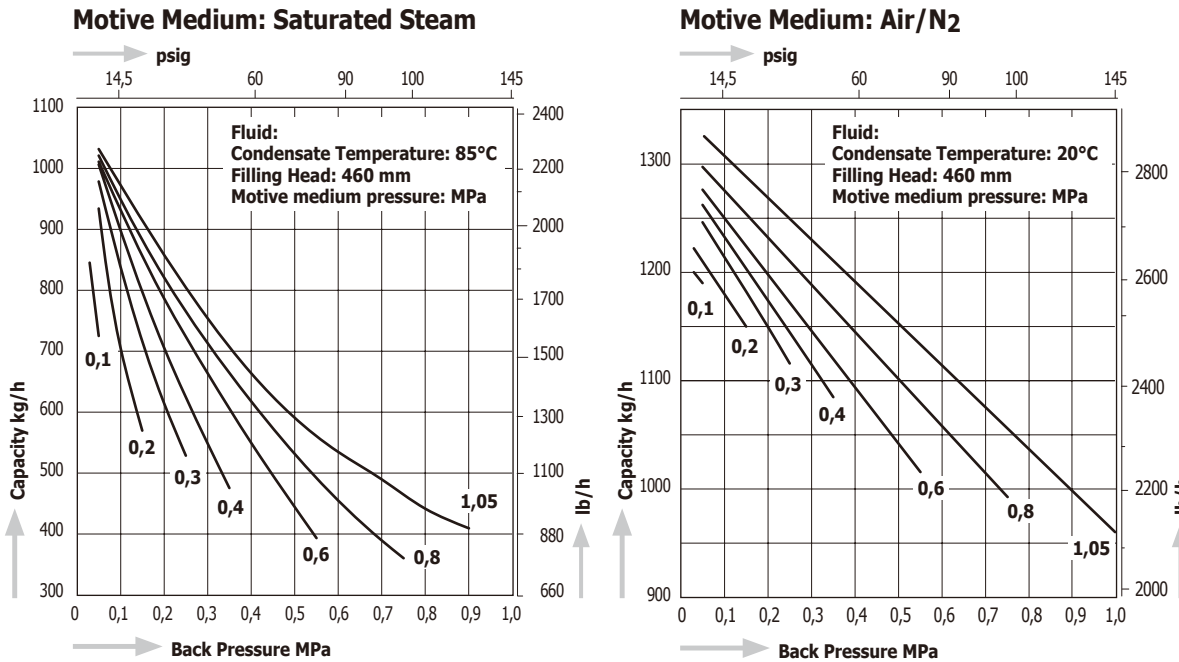


Capacity for other filling heads:

To get the capacity for other filling heads multiply the capacity of this chart by the "FH-factors".

| Filling Head | | FH-factors |
|--------------|------|------------|
| mm | in | |
| 120 | 4.7 | 0,79 |
| 300 | 11.8 | 0,92 |
| 460 | 18.1 | 1,00 |
| 700 | 27.6 | 1,06 |
| 1000 | 39.4 | 1,11 |
| 1100 | 43.3 | 1,12 |

Dimensions

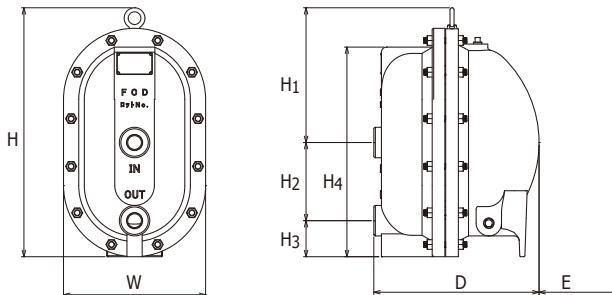

Recommended standard receiver tank dimensions:

Diameter: 8" / DN200
 Length: 580 mm / 22.8 in
 If a receiver tank is not available, a standard pipe (size 3" / DN80) can be used as condensate reservoir.
 Use the following pipe length:


| Connection | | | | Max. Allowable Pressure PMA | | Max. Allowable Temperature TMA | | Max. Operating Pressure PMO | | Max. Operating Temperature TMO | |
|------------------|-------------------|---------------------|----------------|-----------------------------|------|--------------------------------|-----|-----------------------------|------|--------------------------------|-----|
| Inlet Condensate | Outlet Condensate | Inlet Motive Medium | Venting Outlet | MPa | psig | °C | °F | MPa | psig | °C | °F |
| 1" Rc | 1" Rc | ½" Rc | ½" Rc | 1,6 | 232 | 220 | 428 | 1,05 | 152 | 185 | 365 |

| Condensate amount | Length | | | |
|-------------------|--------|------|-------|----|
| | kg/h | lb | mm | in |
| 100 | 220 | 290 | 11.4 | |
| 200 | 440 | 580 | 22.8 | |
| 400 | 880 | 1150 | 45.3 | |
| 600 | 1.320 | 1730 | 68.1 | |
| 800 | 1.760 | 2300 | 90.6 | |
| 1000 | 2.220 | 2870 | 113.0 | |
| 1200 | 2.640 | 3450 | 135.8 | |
| 1300 | 2.860 | 3730 | 146.9 | |


| Dimensions | | | | | | | | | | | Body Material | | Weight | | | | | |
|------------|------|-----|------|-----|-----|----|-----|-----|------|-----|---------------|-----|--------|------|------|--|----|-----|
| H | H1 | H2 | H3 | H4 | D | W | E* | mm | in | mm | | | | | in | kg | lb | |
| 495 | 19.5 | 270 | 10.6 | 154 | 6.1 | 70 | 2.8 | 413 | 16.3 | 325 | 12.8 | 280 | 11.0 | >165 | >6.5 | Ductile Cast Iron FCD450 comparable with EN-GJS-450-10 (EN-JS1040) | 50 | 110 |

*Maintenance space

GL81E

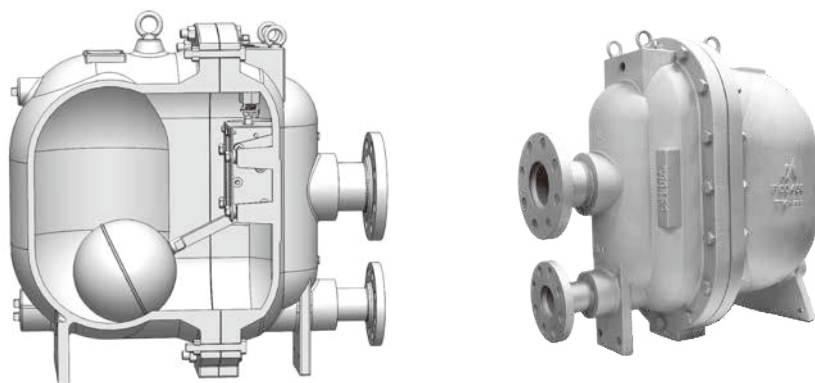

GL81E

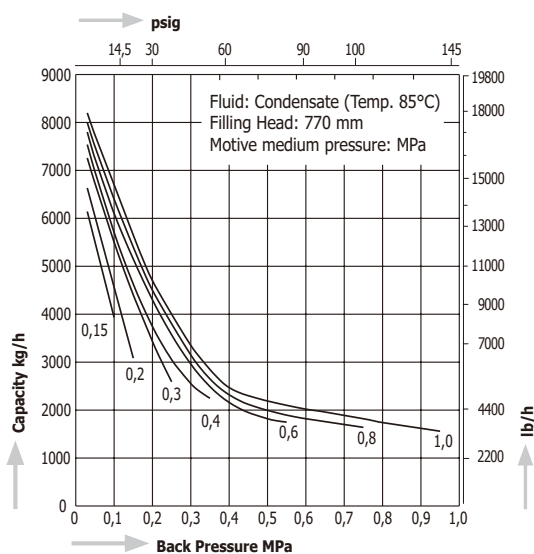

Capacity for other filling heads:

To get the capacity for other filling heads multiply the capacity of this chart by the "FH-factors".

| Filling Head | | FH-factors |
|--------------|------|------------|
| mm | in | |
| 150 | 5.9 | 0,66 |
| 270 | 10.6 | 0,75 |
| 370 | 14.5 | 0,82 |
| 570 | 22.4 | 0,92 |
| 770 | 30.3 | 1,00 |
| 970 | 38.2 | 1,01 |
| 1270 | 50.0 | 1,03 |


Model GL81E: To get the capacity for air/N₂ as motive medium, please ask MIYAWAKI Inc. or an authorized representative.

| Model | Connection | | | | Max. Allowable Pressure PMA | | Max. Allowable Temperature TMA | | Max. Operating Pressure PMO | | Max. Operating Temperature TMO | |
|--------------|--------------------------|-------------------|---------------------|----------------|-----------------------------|------|--------------------------------|-----|-----------------------------|------|--------------------------------|-----|
| | Inlet Condensate | Outlet Condensate | Inlet Motive Medium | Venting Outlet | MPa | psig | °C | °F | MPa | psig | °C | °F |
| GL81E | Flanged PN16, ASME 150lb | | Screwed Rc | | 1,6 | 232 | 185 | 365 | 1,05 | 152 | 185 | 365 |
| | DN80 (3") | DN50 (2") | ½" | 1" | | | | | | | | |


| Model | Dimensions | | | | | | | | | | | | | | | | Body Material | Weight | | | | |
|--------------|------------|------|-----|-----|-----|-----|-----|------|-----|------|-----|-----|-----|------|----|-----|---------------|--------|----|----|-----|-----|
| | H | | H1 | | H2 | | H3 | | D | | D1 | | W | | W1 | | | E* | | kg | lb | |
| | mm | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm | in | | mm | in | | | |
| GL81E | 670 | 26.4 | 220 | 8.7 | 123 | 4.8 | 579 | 22.8 | 680 | 26.8 | 240 | 9.4 | 368 | 14.5 | 50 | 2.0 | > 380 | > 15.0 | | | 160 | 353 |

*Maintenance space

Dimensions

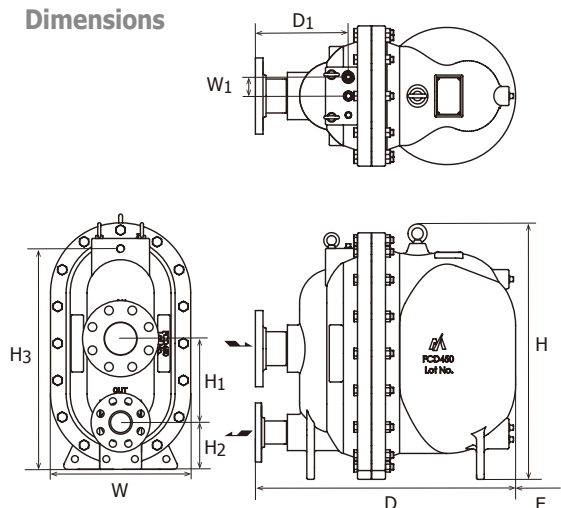


Steam and Air/N₂ consumption chart for GL81E

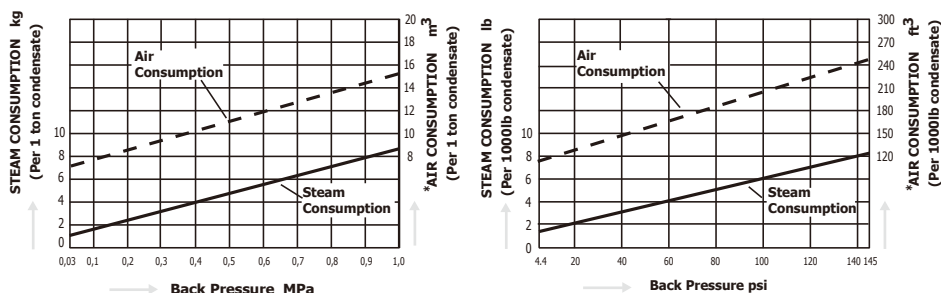


Equivalent consumption of air at 20°C (68°F) under atmospheric pressure.

GLP71, GLP81E

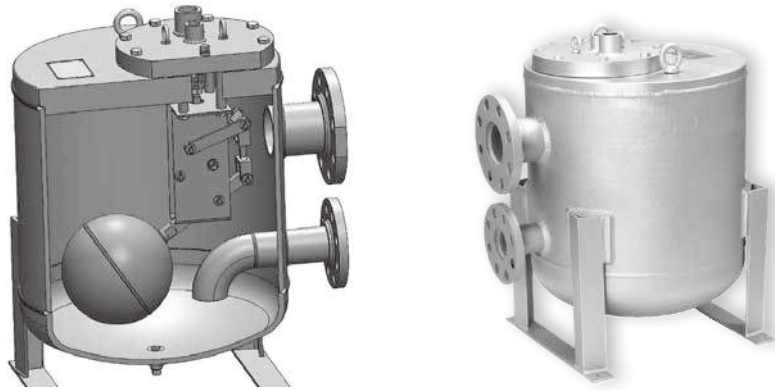

Flow Capacity Charts

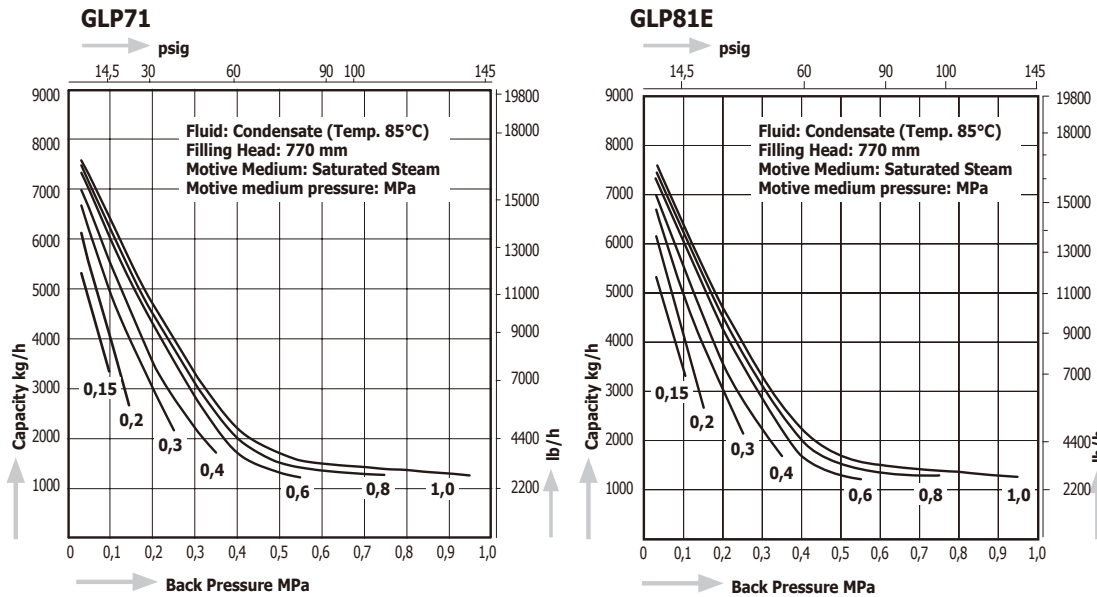

Capacity for other filling heads:

To get the capacity for other filling heads multiply the capacity of this chart by the "FH-factors".

| Filling Head | | FH-factors |
|--------------|------|------------|
| mm | in | |
| 150 | 5.9 | 0,66 |
| 270 | 10.6 | 0,75 |
| 370 | 14.5 | 0,82 |
| 570 | 22.4 | 0,92 |
| 770 | 30.3 | 1,00 |
| 970 | 38.2 | 1,01 |
| 1270 | 50.0 | 1,03 |

Model GLP81 and GPL81E: To get the capacity for air/N₂ as motive medium, please, see our Technical Bulletin No. 017-002.


| Model | Connection | | | | Max. Allowable Pressure PMA | | Max. Allowable Temperature TMA | | Max. Operating Pressure PMO | | Max. Operating Temperature TMO | |
|--------|------------------------------|-------------------|---------------------|----------------|-----------------------------|------|--------------------------------|-----|-----------------------------|------|--------------------------------|-----|
| | Inlet Condensate | Outlet Condensate | Inlet Motive Medium | Venting Outlet | MPa | psig | °C | °F | MPa | psig | °C | °F |
| GLP71 | Flanged PN16, ASME 150lb | | Screwed Rc | | 1,6 | 232 | 220 | 428 | 1,05 | 152 | 185 | 365 |
| | DN80 (3") | DN50 (2") | ½" | 1" | | | | | | | | |
| GLP81E | Flanged JIS16KFF, ASME 150lb | | Screwed Rc | | 1,6 | 232 | 185 | 365 | 1,05 | 152 | 185 | 365 |
| | DN80 (3") | DN50 (2") | ½" | 1" | | | | | | | | |

| Model | Dimensions | | | | | | | | | | | | | | Body Material | Weight | | | | |
|--------|------------|------|-----|-----|-----|-----|-----|------|-----|------|-----|------|-----|------|---------------|--------|-------|--------|-----|-----|
| | H | | H1 | | H2 | | D | | D1 | | D2 | | W | | | E* | | kg | lb | |
| | mm | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm | in | | mm | in | | | |
| GLP71 | 656 | 25.8 | 210 | 8.3 | 230 | 9.1 | 630 | 24.8 | | | | | | | | | | 150 | 331 | |
| GLP81E | 669 | 26.3 | 250 | 9.8 | 250 | 9.8 | 554 | 21.8 | 380 | 15.0 | 380 | 15.0 | 400 | 15.7 | 457 | 18.0 | > 550 | > 21.7 | 112 | 247 |


*Maintenance space

Stainless Steel as body material for GLP81 is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.

Dimensions

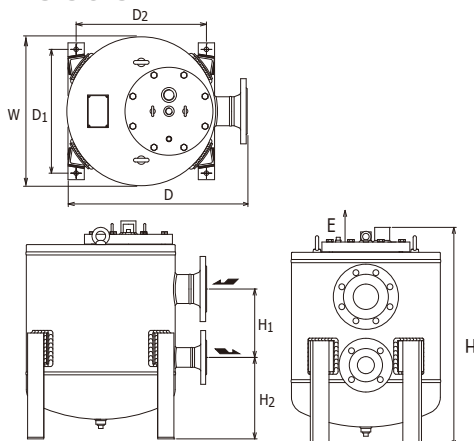

Steam and Air/N₂ consumption chart for GLP71, GLP81E

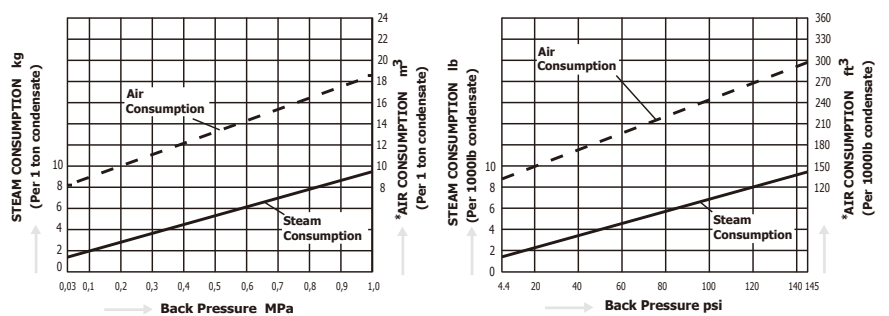


Equivalent consumption of air at 20°C (68°F) under atmospheric pressure

Installation line examples


Open system

● GL81E

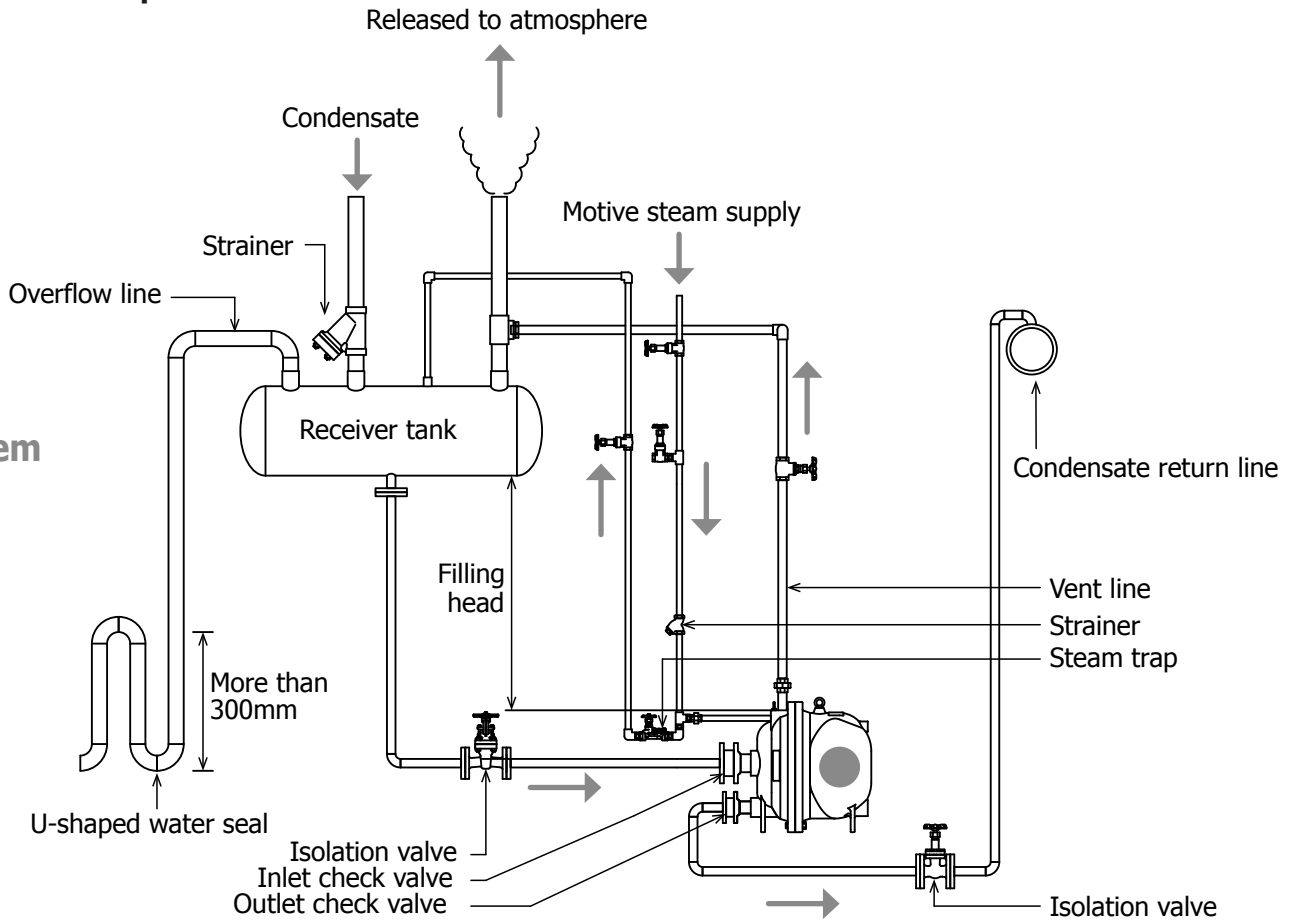


Closed system


● GL81E

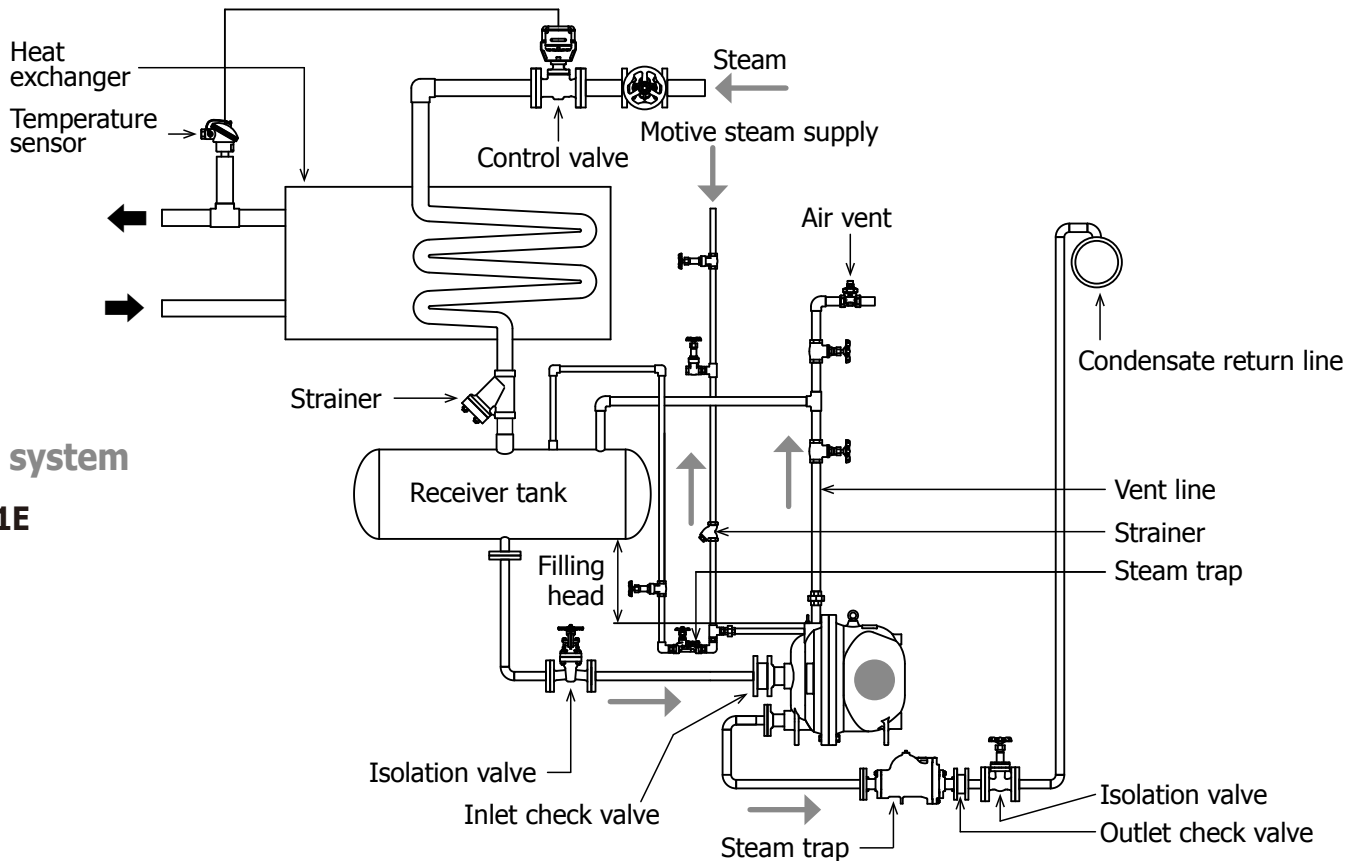


GL11

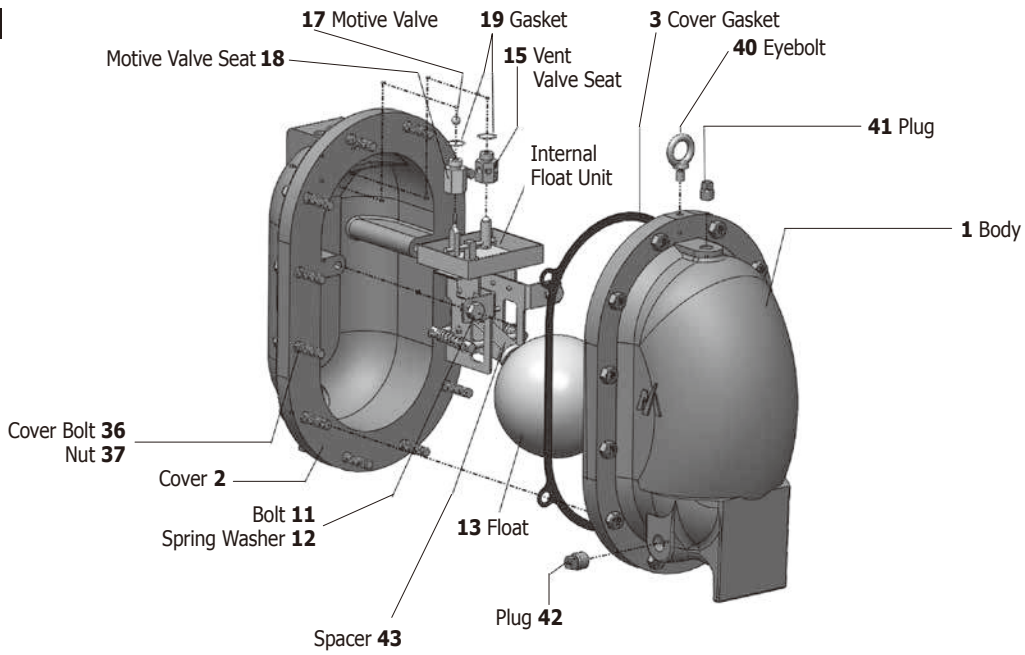

GLP71, GLP81E

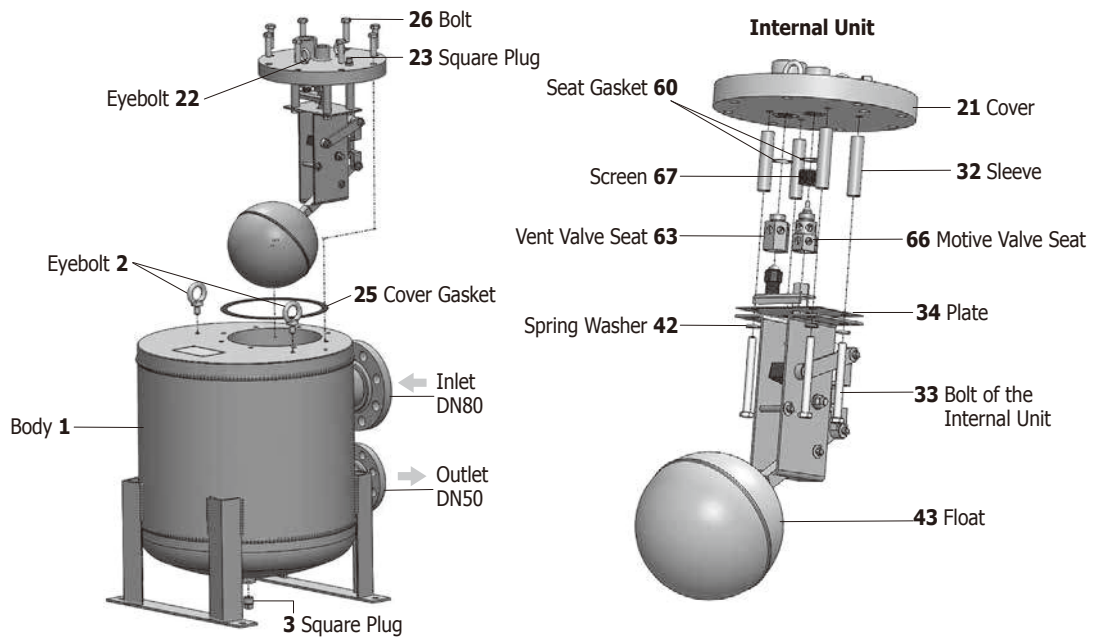

GL81E

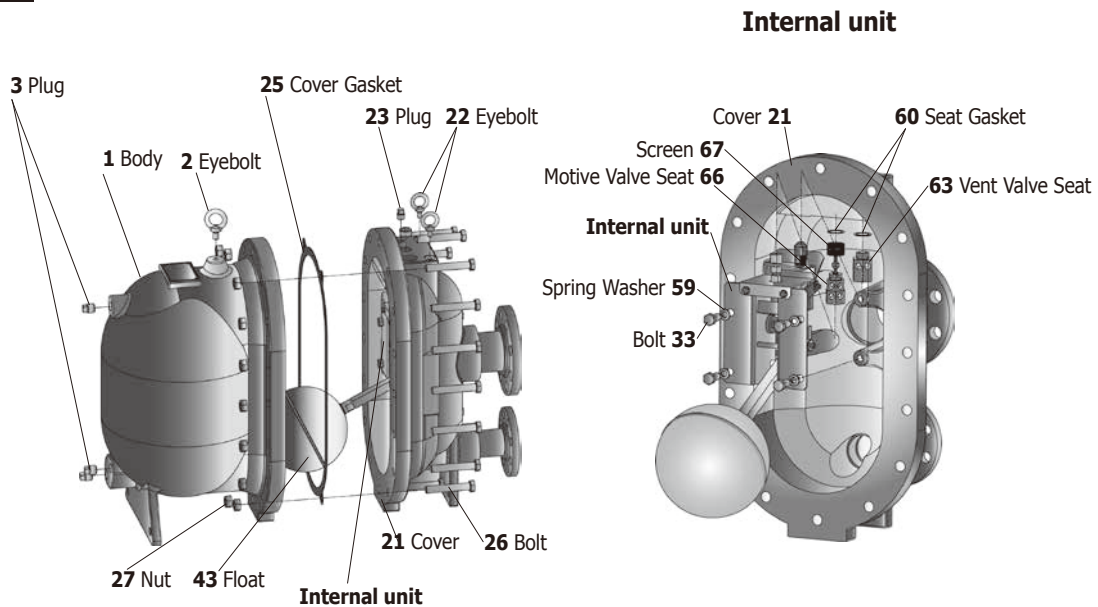

Air Traps

SERIES A

MIYAWAKI **Air Traps** are designed for discharge of condensate from air piping, receiver tanks, gas and compressed air systems.


Depending on the operating conditions and applications a wide range of various types of air traps is available. Most of the traps can be fitted with a pressure – balancing line to ensure air can escape from the trap body to prevent air locking. Pressure-balancing lines are usually not necessary, if the air trap is installed directly below the equipment to be drained or if the trap is installed vertically.

MIYAWAKI offers different seat materials and various body materials (including stainless steel) for draining special gas applications.


Models

| | |
|---------------------|--|
| AG11, AG12 | Cast iron ball float air traps for medium condensate amounts |
| AGC1V | Stainless steel ball float air trap for small condensate loads (vertical installation) |
| AGH29 | Cast steel ball float air and gas trap |
| AGU29 | Stainless steel ball float air and gas trap |
| AGH12, AGH50 | Cast Steel ball float air and gas trap |
| AE8 | Ductile cast iron inverted bucket air trap |
| AV | Cast iron thermodynamic air trap with incorporated bypass |


Installation Example

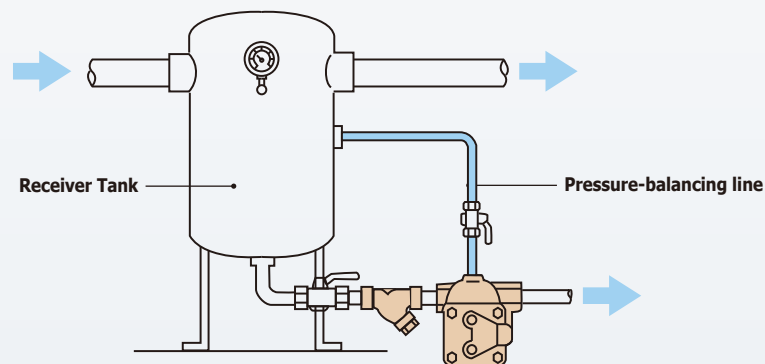


Operating principle

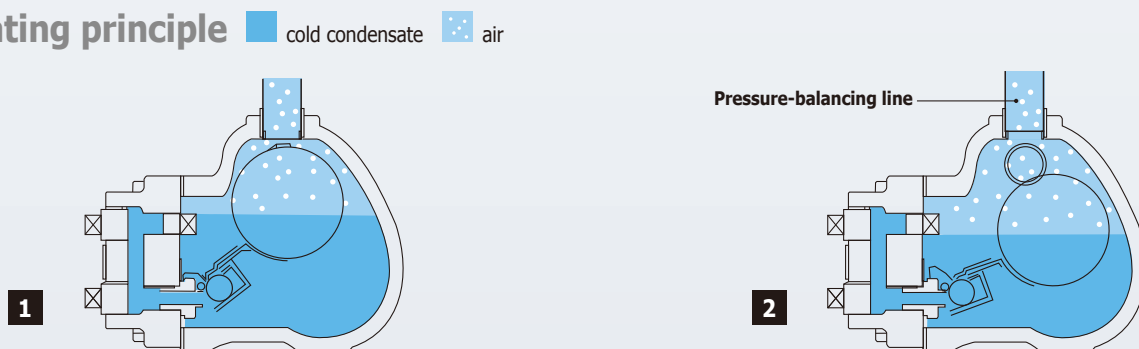


AG11, AG12

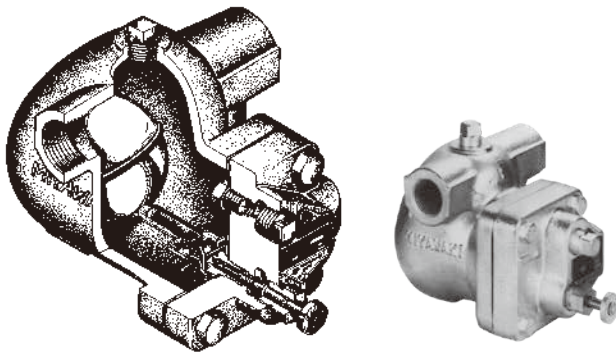


Capacity Chart AG11, AG12

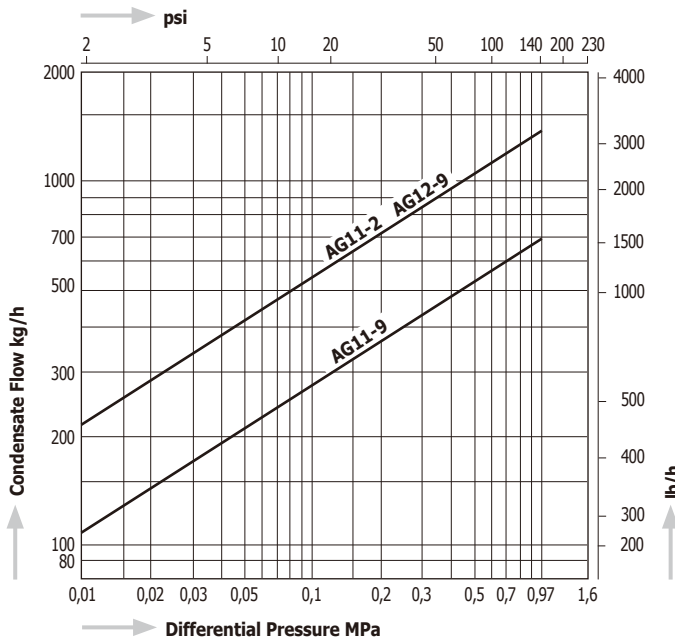


AGC1V

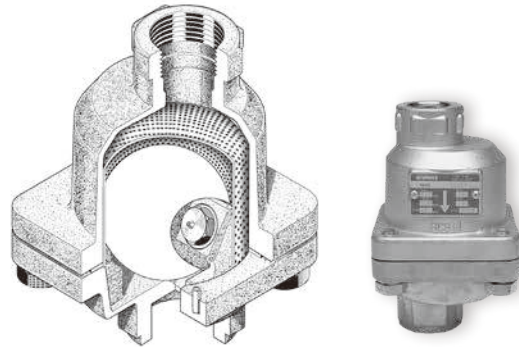

Capacity Chart AGC1V

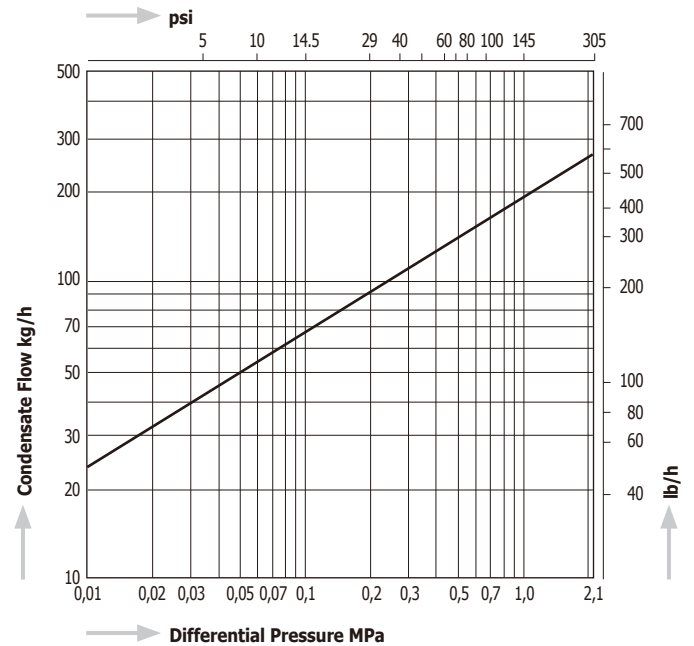


Dimensions AG11, AG12

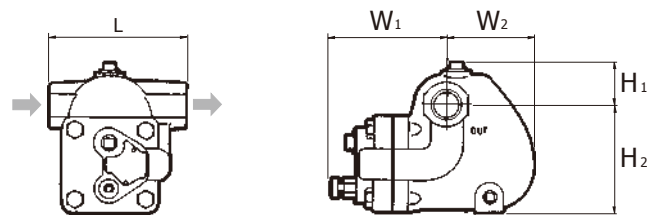


Dimensions

AGC1V, AGC1V-W




AGC1V-F




| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | | | Dimensions (in) | | | | | | Body Material | Weight | |
|----------------------|----------------------------|------------|-------------------------|------|----------------------------|-----|-----------------|-----|----|-----|-----|-----|-----------------|-----|-----|-----|-----|----------------------------|----------------------------|--------|-----|
| | | | MPa | psig | °C | °F | L | H1 | H2 | W1 | W2 | W | L | H1 | H2 | W1 | W2 | W | | kg | lb |
| AG11 - 2 AG12 - 9 | Screwed Rc, NPT | 1/2", 3/4" | 0,2 | 29 | 100 | 212 | 120 | 37 | 92 | 121 | 60 | - | 4.7 | 1.5 | 3.6 | 4.8 | 2.4 | - | Cast Iron FC250 | 3,9 | 8.6 |
| | | 3/4", 1" | 0,97 | 140 | | | 140 | 140 | 47 | 113 | 129 | 92 | - | 5.5 | 1.9 | 4.4 | 5.1 | 3.6 | | - | 5,9 |
| AGC1V | Screwed Rc, NPT | 1/2" | 2,1 | 305 | 350 | 662 | 127 | - | - | 53 | - | 86 | 5.0 | - | - | 2.1 | - | 3.4 | Stainless Steel SCS13A/CF8 | 1,8 | 4.0 |
| | | 3/4" | | | | | 5.4 | | | | | | 1,9 | | | | | | | 4.2 | |
| | | 1" | | | | | 5.5 | | | | | | 2,0 | | | | | | | 4.4 | |
| | | 1 1/2" | | | | | 5.5 | | | | | | 2,0 | | | | | | | 4.4 | |
| AGC1V-W | Socket Weld JIS, ASME, DIN | 1/2" | 2,1 | 305 | 350 | 662 | 127 | - | - | 53 | - | 86 | 5.0 | - | - | 2.1 | - | 3.4 | Stainless Steel SCS13A/CF8 | 1,8 | 4.0 |
| | | 3/4" | | | | | 5.4 | | | | | | 1,9 | | | | | | | 4.2 | |
| | | 1" | | | | | 5.5 | | | | | | 2,0 | | | | | | | 4.4 | |
| AGC1V-F | Flanged JIS, ASME, DIN | 1/2" | 2,1 | 305 | 350 | 662 | 175 | - | - | 53 | 86 | 6.9 | - | - | 2.1 | - | 3.4 | Stainless Steel SCS13A/CF8 | 3,3 | 7.3 | |
| | | 3/4" | | | | | 7.7 | | | | | 4,5 | | | | | | | 9.9 | | |
| | | 1" | | | | | 8.5 | | | | | 5,3 | | | | | | | 11.7 | | |
| | | 1 1/2" | | | | | 8.5 | | | | | 5,3 | | | | | | | 11.7 | | |

Horizontal version for AGC1V is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.


AE8

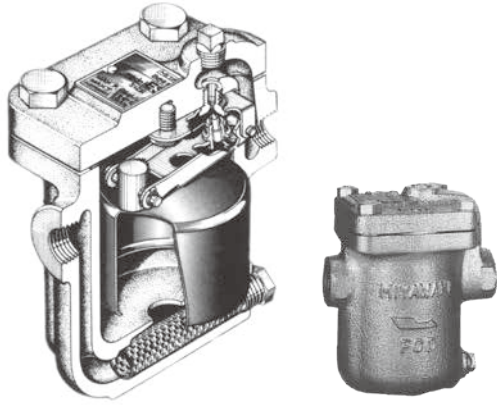


AV

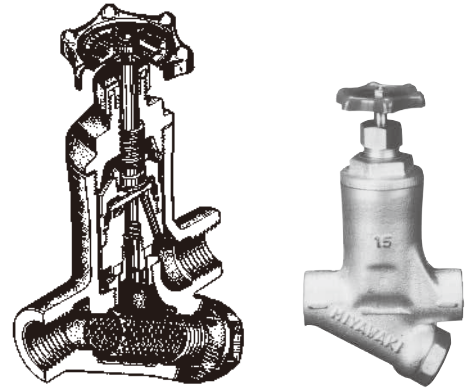

Capacity Chart AE8

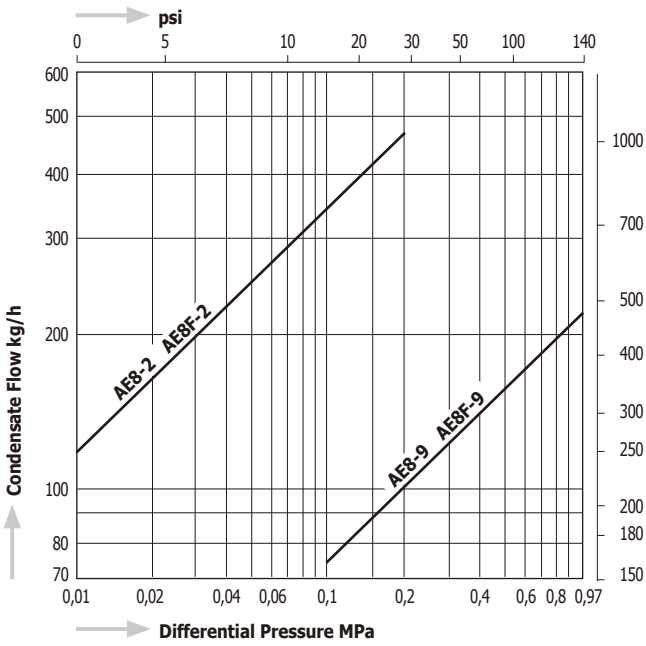


Capacity Chart AV

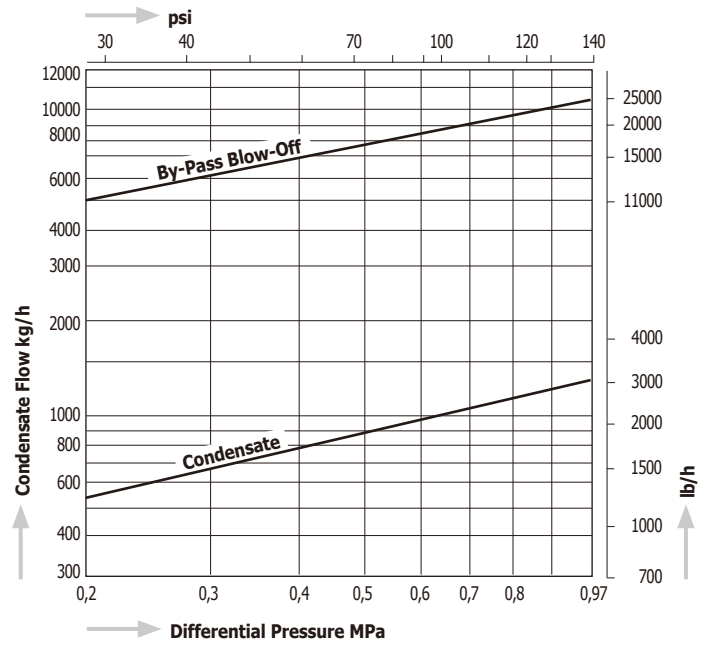


Dimensions


AE8



AE8F

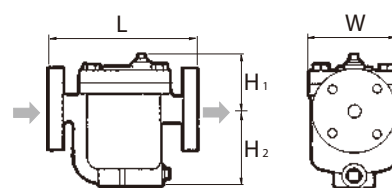


AV




| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | | | | |
|--------|------------------------|--------|-------------------------|------|----------------------------|-----|-----------------|----------------|----------------|-----|-----------------|----------------|----------------|--------------------------|--------------------------|--------|------|-----|------|------|
| | | | MPa | psig | °C | °F | L | H ₁ | H ₂ | W | L | H ₁ | H ₂ | W | | kg | lb | | | |
| AE8-2 | Screwed Rc, NPT | 1/2" | 0,2 | 29 | 350 | 662 | 130 | 73 | 90 | 100 | 5.1 | 2.9 | 3.5 | 3.9 | Ductile Cast Iron FCD450 | 3,7 | 8.1 | | | |
| | | 3/4" | | | | | 135 | 73 | 90 | 100 | 5.3 | | | | | 3,9 | 8.6 | | | |
| | | 1" | 0,97 | 140 | | | 130 | 73 | 90 | 100 | 5.1 | 2.9 | 3.5 | 3.9 | | 3,7 | 8.1 | | | |
| | | 3/4" | | | | | 135 | 73 | 90 | 100 | 5.3 | | | | | 3,9 | 8.6 | | | |
| AE8F-2 | Flanged JIS, ASME, DIN | 1/2" | 0,2 | 29 | 350 | 662 | 175 | 73 | 90 | 100 | 6.9 | 2.9 | 3.5 | Ductile Cast Iron FCD450 | | 5,3 | 11.7 | | | |
| | | 3/4" | | | | | 195 | 68 | 95 | | 7.7 | 2.7 | 3.7 | | | 5,7 | 12.5 | | | |
| | | 1" | 0,97 | 140 | | | 215 | 73 | 90 | 100 | 8.5 | 2.9 | 3.5 | | | 6,8 | 15.0 | | | |
| | | 3/4" | | | | | 175 | 73 | 90 | | 6.9 | | | | | 2.9 | 3.5 | 5,3 | 11.7 | |
| | | AE8F-9 | Flanged JIS, ASME, DIN | 1/2" | | | 0,97 | 140 | 350 | 662 | 195 | 68 | 95 | | 100 | 7.7 | 2.7 | 3.7 | 5,7 | 12.5 |
| | | | | 3/4" | | | | | | | 215 | | | | | 73 | | | 90 | 8.5 |
| AV-4 | Screwed Rc, NPT | 1/2" | 0,97 | 140 | 150 | 302 | 110 | 155 | 60 | 65 | 4.3 | 6.1 | 2.4 | | Cast Iron FC250 | 2,4 | 5.3 | | | |
| | | 3/4" | | | | | 65 | | 2.6 | | 2,5 | | 5.5 | | | | | | | |
| | | 1" | | | | | 70 | | 2.8 | | 2,7 | | 6.0 | | | | | | | |

AGH29, AGU29

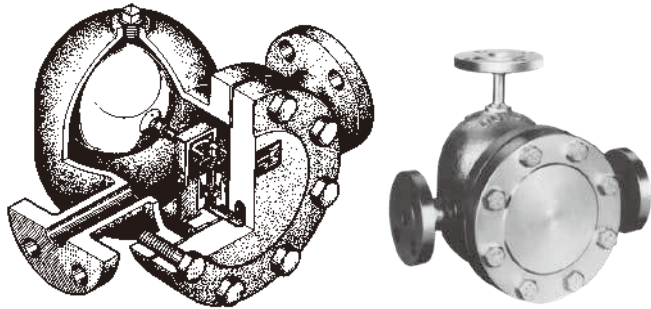


Capacity Chart AGH29, AGU29

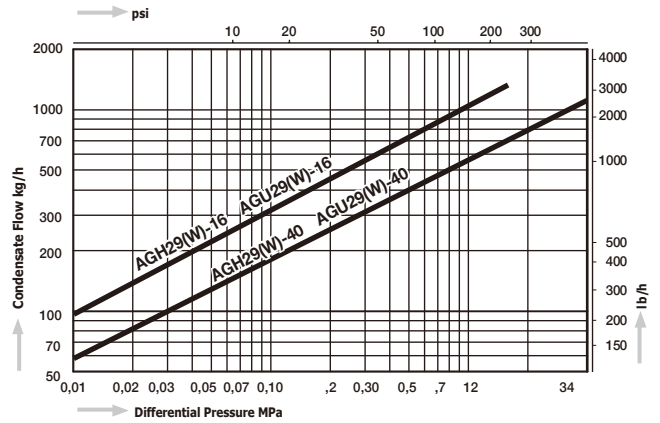

Dimensions

AGH29, AGU29


AGH29W, AGU29W

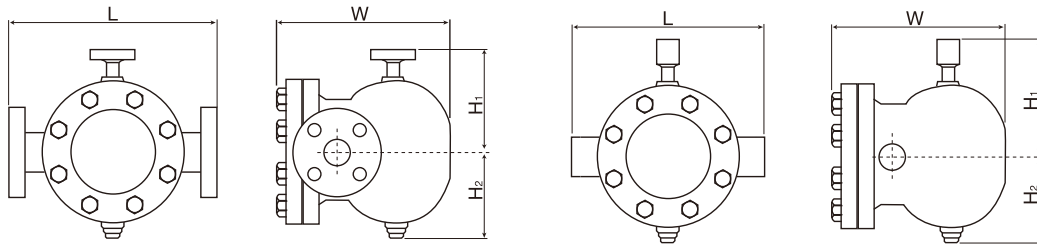


| Model | Connections | Size | Max. Operating Pressure PMO | | Max. Differential Pressure PMX | | Max. Operating Temperature TMO | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|-----------------|--|---------|-----------------------------|------|--------------------------------|------|--------------------------------|-----|-----------------|----------------|----------------|-----|-----------------|----------------|----------------|------|--------------------------------------|--------|-------|
| | | | MPa | psig | MPa | psig | °C | °F | L | H ₁ | H ₂ | W | L | H ₁ | H ₂ | W | | kg | lb |
| AGH29 - | 16 Flanged JIS, ASME, DIN | ½" - 2" | 3,0 | 435 | 1,6 | 232 | 400 | 752 | 340 | 200 | 120 | 260 | 13,4 | 7,9 | 4,7 | 10,2 | Cast Steel SCPH2/ WCB | 28,0* | 61,7* |
| | | | 4,5 | 652 | 4,0 | 580 | | | 390 | | | | 15,4 | | | | | 32,0* | 70,5* |
| AGH29W - | 16 Socket Weld JIS, ASME, DIN | ½" - 1" | 3,0 | 435 | 1,6 | 232 | 400 | 752 | 280 | 200 | 120 | 260 | 11,0 | 7,9 | 4,7 | 10,2 | Cast Steel SCPH2/ WCB | 25,5 | 56,1 |
| | | | 4,5 | 652 | 4,0 | 580 | | | | | | | | | | | | | |
| AGU29 - | 16 Flanged JIS, ASME, DIN | ½" - 2" | 3,0 | 435 | 1,6 | 232 | 400 | 752 | 340 | 200 | 120 | 260 | 13,4 | 7,9 | 4,7 | 10,2 | Stainless Steel SCS13A/ CF8 | 28,0* | 61,7* |
| | | | 4,5 | 652 | 4,0 | 580 | | | 390 | | | | 15,4 | | | | | 32,0* | 70,5* |
| AGU29W - | 16 Socket Weld JIS, ASME, DIN | ½" - 1" | 3,0 | 435 | 1,6 | 232 | 400 | 752 | 280 | 200 | 120 | 260 | 11,0 | 7,9 | 4,7 | 10,2 | Stainless Steel SCS13A/ CF8 | 25,5 | 56,1 |
| | | | 4,0 | 580 | | | | | | | | | | | | | | | |

* The weight may differ depending on the size and flange standard.

AGH12, AGH50




AGH12

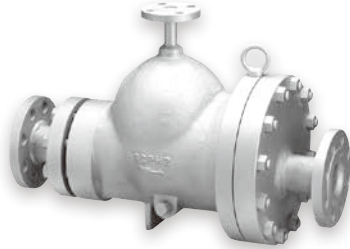


AGH50

Capacity Chart AGH12-45

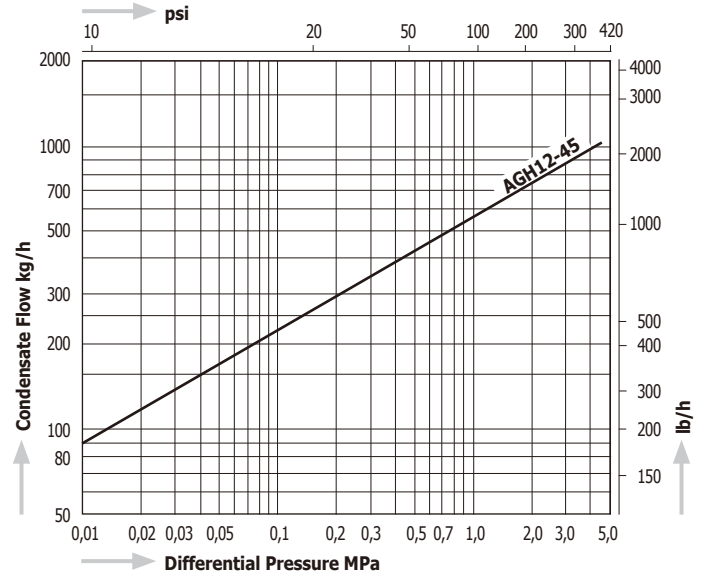


Dimensions


AGH12-45F

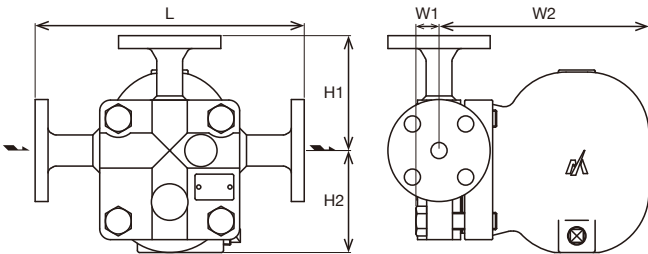

AGH12-45W

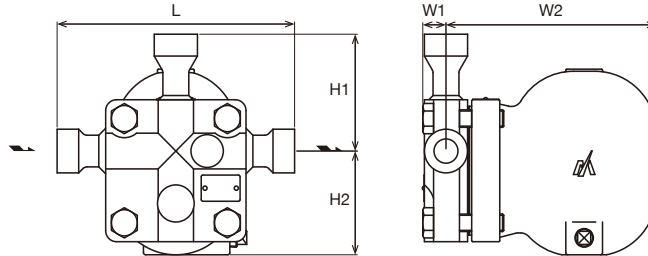

AGH50

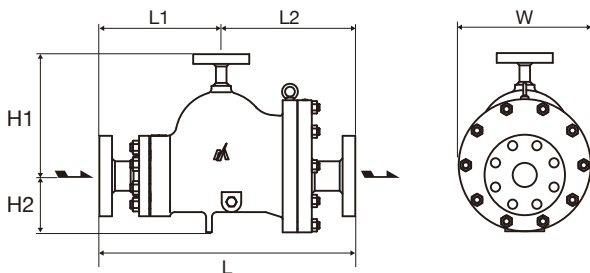

Capacity Chart AGH50

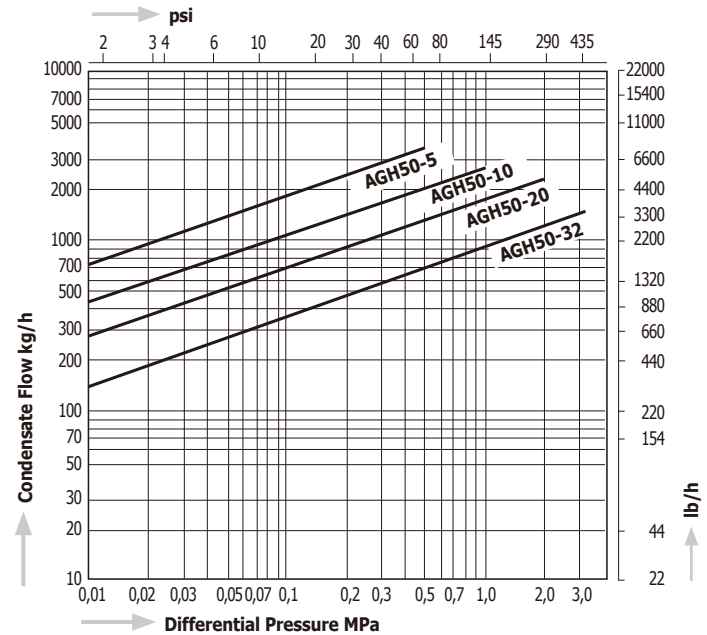


Table 1: Dimensions L and Weight


| Model | Size | ASME Class* (#150, #300) | | | | | | | |
|-------|------|--------------------------|----------------|----------------|------------------|----------------|----------------|---------|---------------|
| | | Dimensions* (mm) | | | Dimensions* (in) | | | Weight* | |
| | | L | L ₁ | L ₂ | L | L ₁ | L ₂ | kg | lb |
| AGH50 | 2" | 525 | 250 | 275 | 20.7 | 9.8 | 10.8 | 64 | 140.8 |
| | 2½" | 550 | 265 | 285 | 21.7 | 10.4 | 11.2 | 68 | 149.6 |
| | 3" | 555 | | 290 | 21.9 | 10.4 | 11.4 | 72 | 158.4 |
| | 4" | 590 | 285 | 305 | 23.2 | 11.2 | 12.0 | 73 / 82 | 160.6 / 180.4 |

| Model | Connections | Size | Max. Operating Pressure, PMO | | Max. Differential Pressure, PMX | | Max. Operating Temperature, TMO | | Dimensions* (mm) | | | | Dimensions* (in) | | | | Body Material | Weight* | | |
|-------------|-------------------------------|---------|------------------------------|------|---------------------------------|------|---------------------------------|-----|------------------|----------------|----------------|-----|------------------|----------------|----------------|------|-----------------------------|---------|------|--|
| | | | MPa | psig | MPa | psig | °C | °F | L | H ₁ | H ₂ | W | L | H ₁ | H ₂ | W | | kg | lb | |
| AGH12 - 45F | Flanged JIS, ASME, DIN | ½" - 1" | 4,5 | 652 | 4,5 | 652 | 425 | 800 | 250 | 107 | 95 | 195 | 9.8 | 4.2 | 3.7 | 7.7 | Cast Steel SCPH2/ WCB | 17 | 37.4 | |
| AGH12 - 45W | Socket Weld JIS, ASME, DIN | | | | | | | | 220 | 75 | | | 8.7 | | | | | 12 | 26.4 | |
| AGH50 - | Flanged JIS, ASME, DIN | 2" - 4" | 3,2 | 464 | | | 400 | 752 | Table 1 | 250 | 115 | 270 | Table 1 | 9.8 | 4.5 | 10.6 | Cast Steel SCPH2 | Table 1 | | |
| | | | | | | | | | | | | | | | | | | 0,5 | 72.5 | |
| | | | | | | | | | | | | | | | | | | 1,0 | 145 | |
| | | | | | | | | | | | | | | | | | | 2,0 | 290 | |
| | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | |


* Depending on the flange standard the face-to-face dimensions and the weight may differ.

Stainless Steel as body material is available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.


AG11/AG12

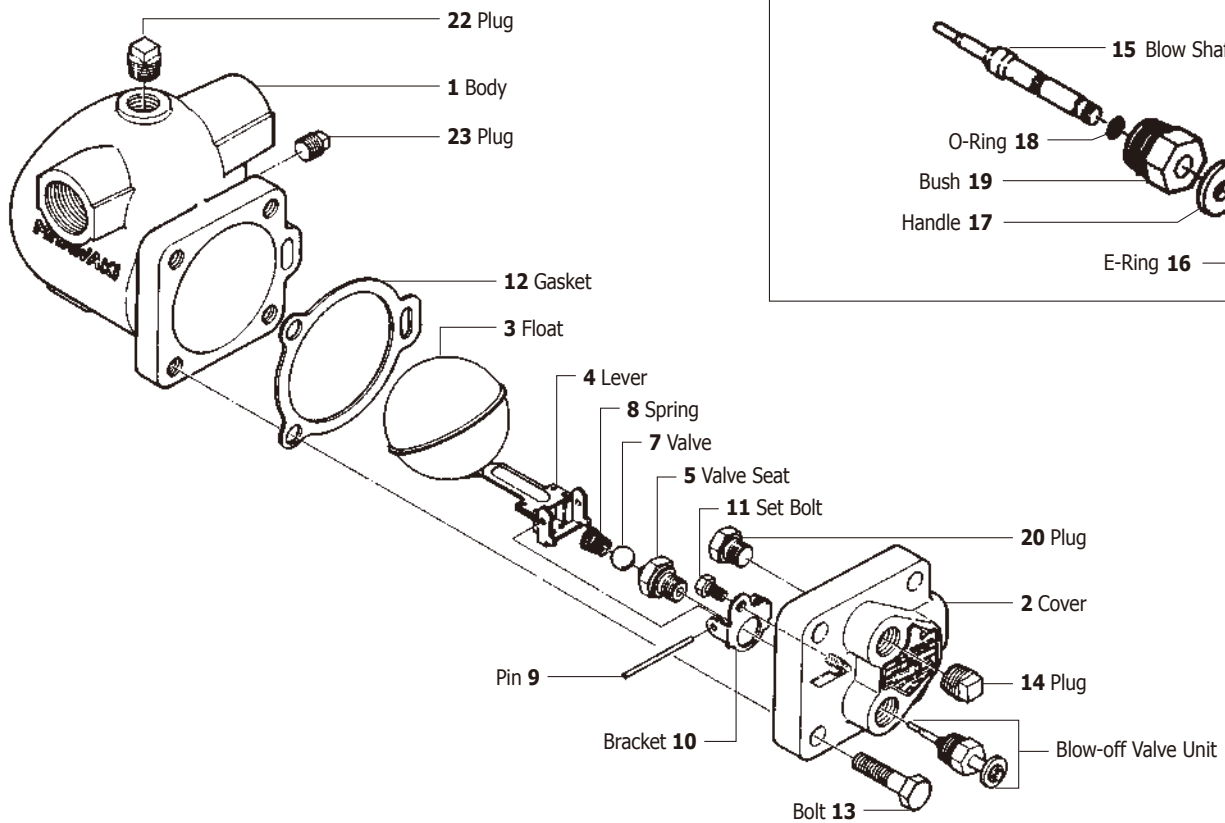


AGC1V

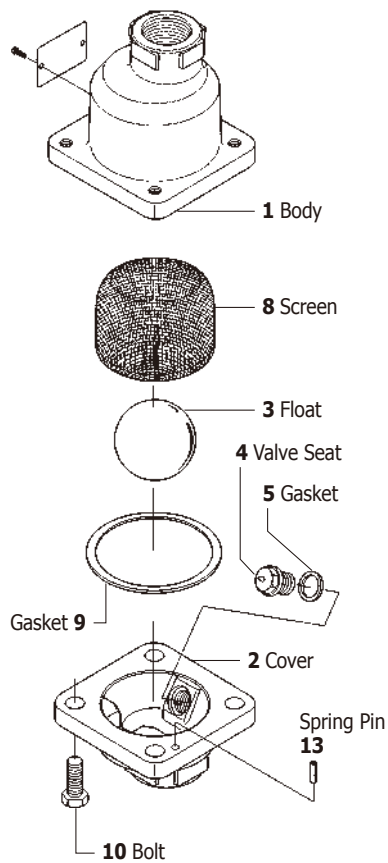


AE8

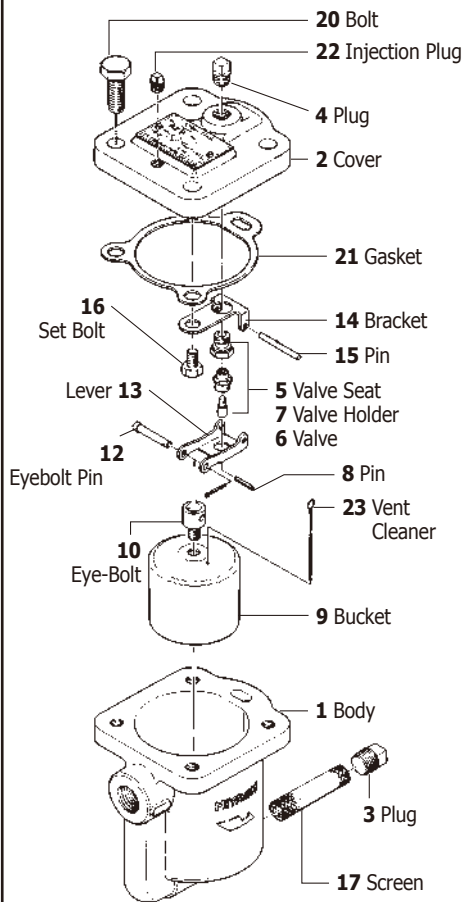


AV

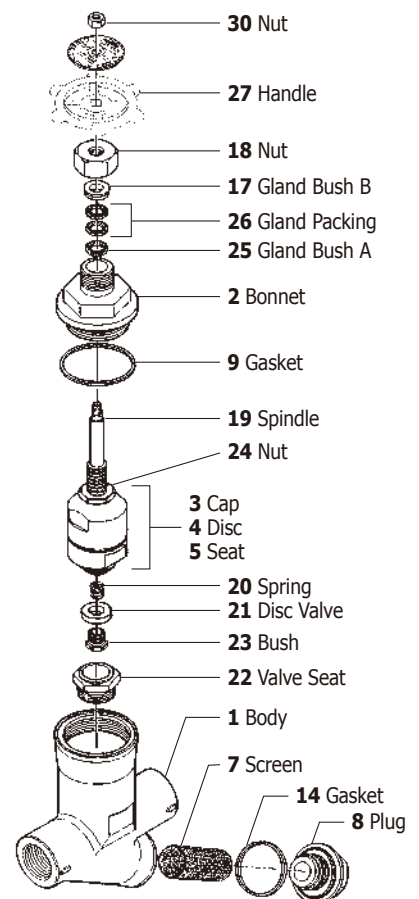


AGH29, AGU29

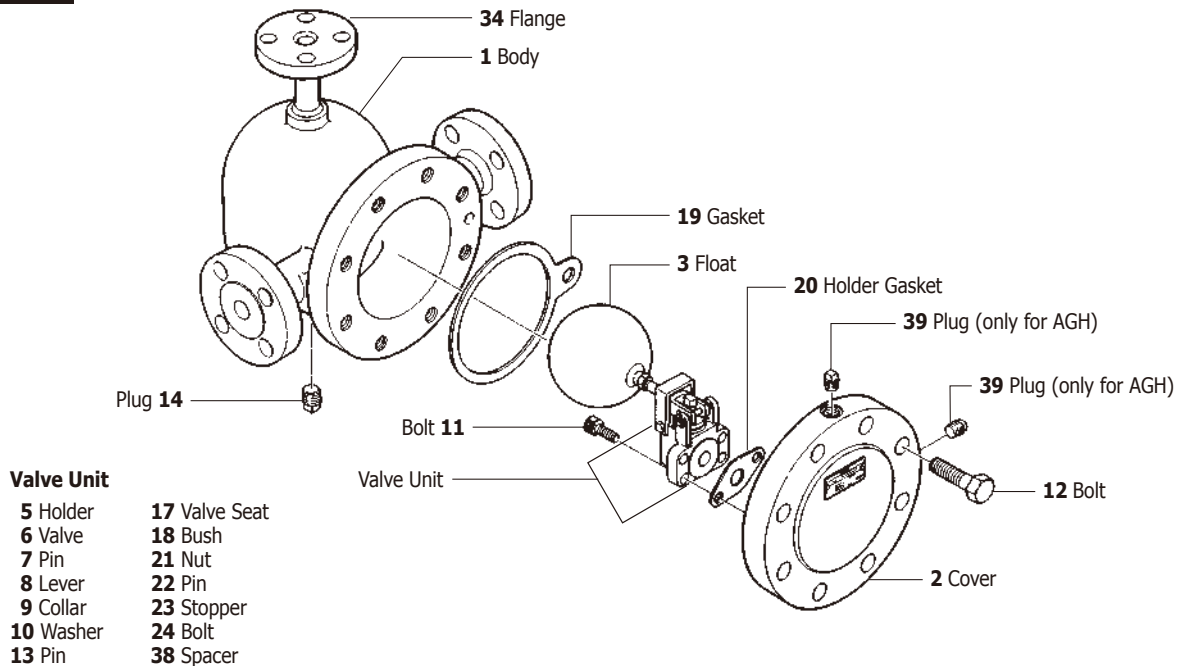

AGH12

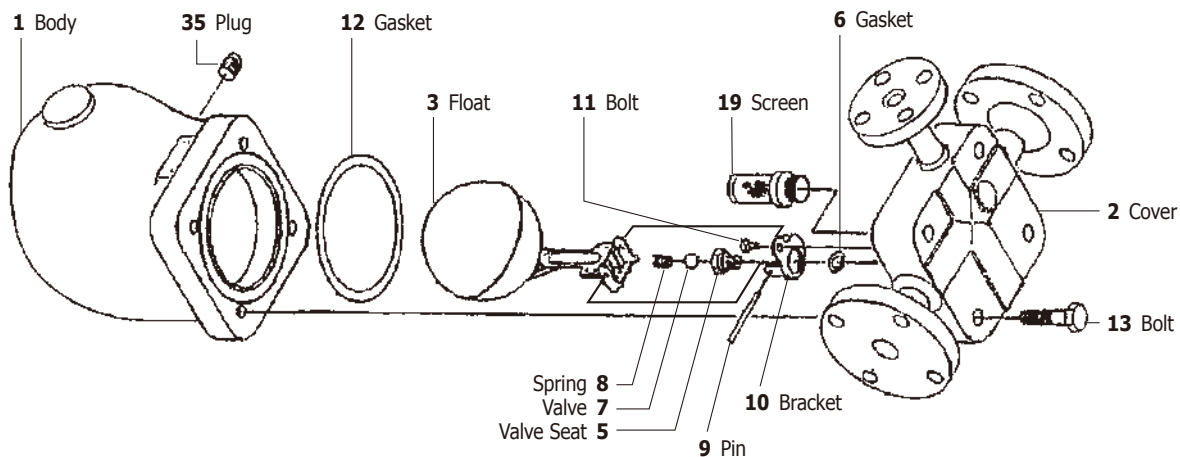

AGH50

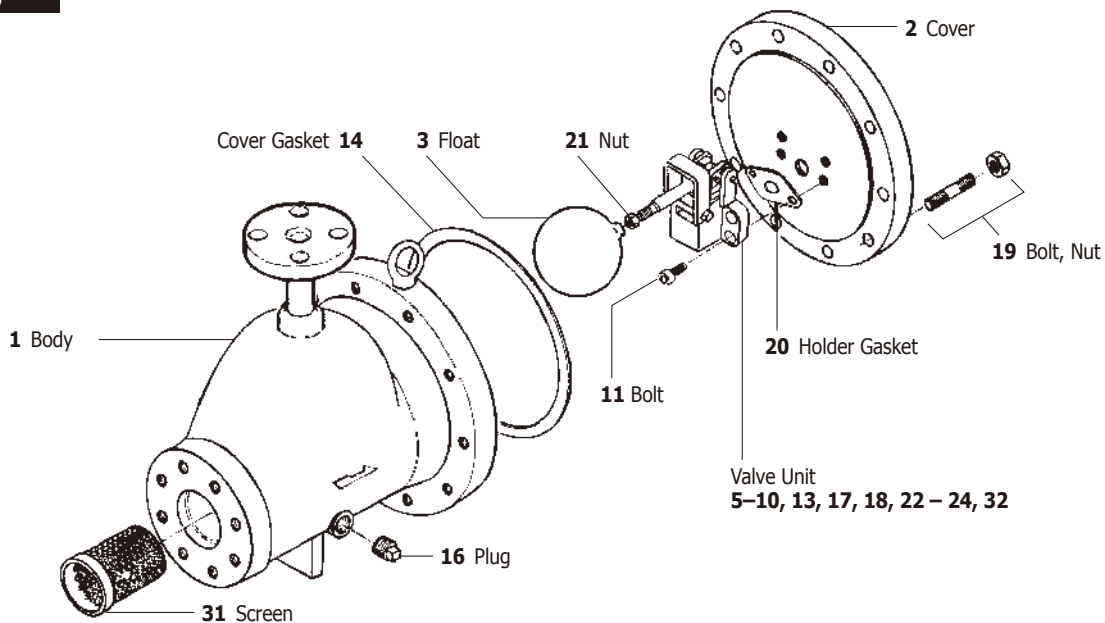

Air Vents

SERIES AT, AD, AW

MIYAWAKI **Air vents** are used to remove air and gases from pipelines for steam and liquids, boilers and other special equipment.

MIYAWAKI offers a wide range of thermostatic air vent. They ensure the efficiency of the system by removing the air and gases accumulated during operation and system downtime.


Air vents must be installed at the highest point of the equipment/ system section to be vented.

Models


- AW** Thermostatic air vents made of brass
- AT7N, AT9N** Forged steel, with bimetal and with the ability to adjust the temperature of the exhaust gas-air mixture for equipment with low and medium pressure
- ADC1, ADL1** Stainless steel thermostatic air vents
- AT51** Forged steel, with the ability to adjust the temperature of the exhaust gas mixture for high pressure equipment

Installation Example


Open boiler

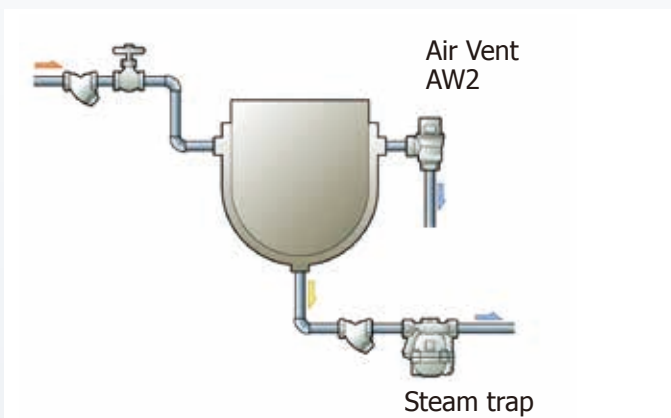


Autoclave

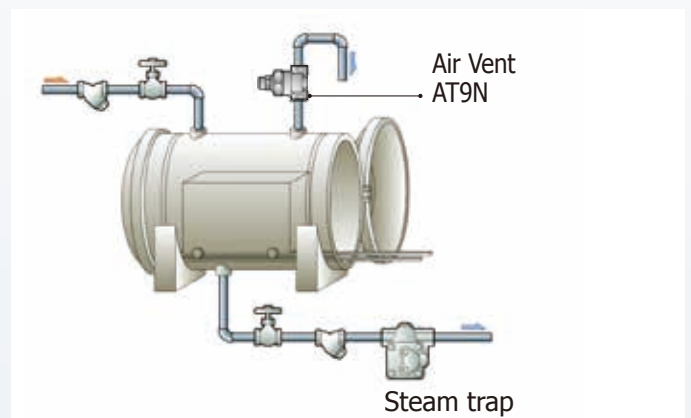


Drum dryer

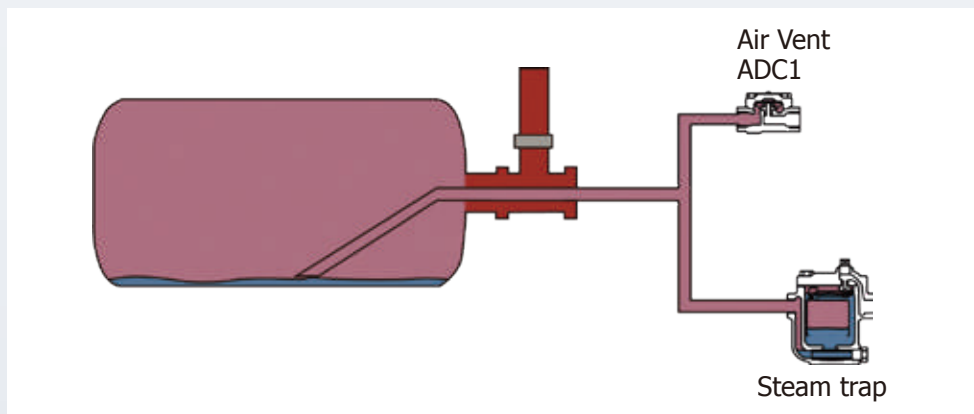


AW2





AT7N



AT9N

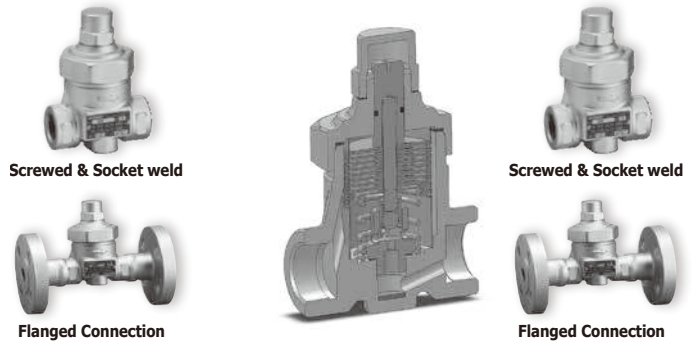

Dimensions

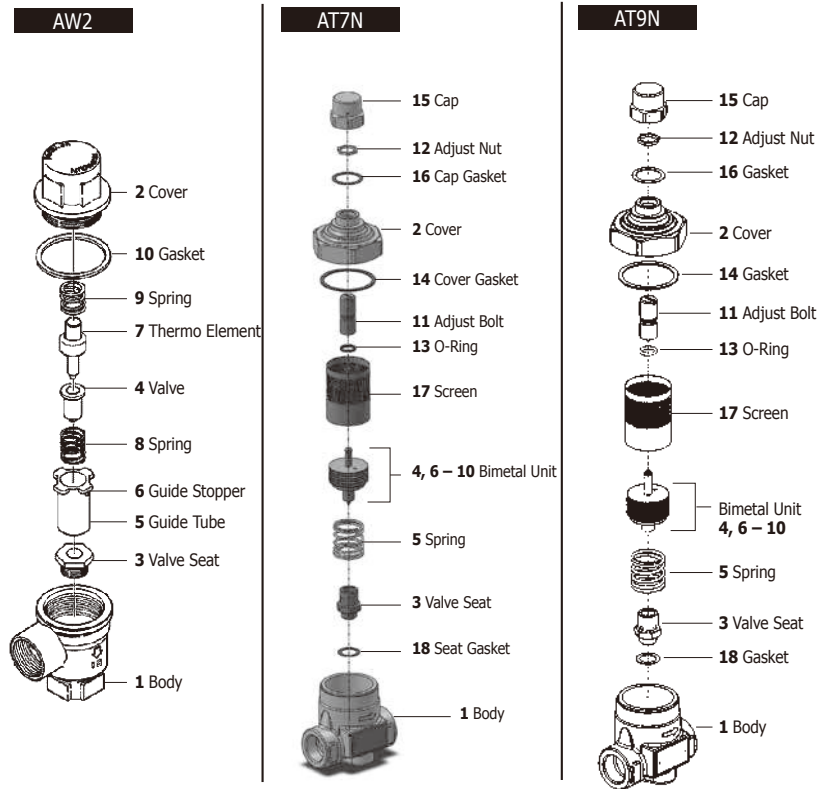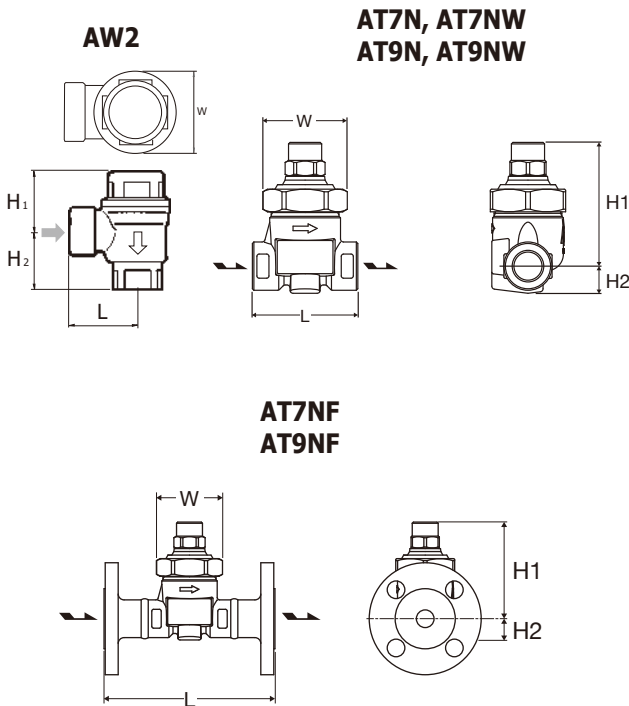


| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|-------|----------------------------|------|-------------------------|------|----------------------------|-----|-----------------|----------------|----------------|-----|-----------------|----------------|----------------|-----|-------------------|--------|-----|
| | | | MPa | psig | °C | °F | L | H ₁ | H ₂ | W | L | H ₁ | H ₂ | W | | kg | lb |
| AW2-5 | Screwed Rc, NPT | 1/2" | 0,5 | 73 | 160 | 320 | 35 | 42 | 35 | 41 | 1.4 | 1.7 | 1.4 | 1.6 | Brass C3771 | 0,4 | 0.9 |
| | | 3/4" | | | | | 41 | 41 | 1.6 | 1.6 | 0,5 | 1.1 | | | | | |
| AT7N | Screwed Rc, NPT | 1/2" | 2,1 | 305 | 350 | 662 | 70 | | 18 | | 2.8 | | 0.7 | | Forged Steel A105 | 0,9 | 2.0 |
| | | 3/4" | | | | | 80 | 82 | 19 | 56 | 3.2 | 3.2 | 0.8 | 2.2 | | 1,0 | 2.2 |
| | | 1" | | | | | | | 23 | | 0.9 | | 1,1 | 2.4 | | | |
| AT7NW | Socket Weld JIS, ASME, DIN | 1/2" | 2,1 | 305 | 350 | 662 | 70 | | 18 | | 2.8 | | 0.7 | | Forged Steel A105 | 0,9 | 2.0 |
| | | 3/4" | | | | | 80 | 82 | 19 | 56 | 3.2 | 3.2 | 0.8 | 2.2 | | 1,0 | 2.2 |
| | | 1" | | | | | | | 23 | | 0.9 | | 1,1 | 2.4 | | | |
| AT7NF | Flanged JIS, ASME, DIN | 1/2" | 2,1 | 305 | 350 | 662 | 145* | 82 | 18 | | 5.7* | 3.2 | 0.7 | | Forged Steel A105 | 2,6 | 5.7 |
| | | 3/4" | | | | | | 19 | 56 | 0.8 | 2.2 | 3,4 | 7.5 | | | | |
| | | 1" | | | | | | 23 | | 0.9 | | 4,0 | 8.8 | | | | |
| AT9N | Screwed Rc, NPT | 1/2" | 1,6 | 230 | 350 | 662 | 70 | | 18 | | 2.8 | | 0.7 | | Forged Steel A105 | 0,9 | 2.0 |
| | | 3/4" | | | | | 80 | 82 | 19 | 56 | 3.2 | 3.2 | 0.8 | 2.2 | | 1,0 | 2.2 |
| | | 1" | | | | | | | 23 | | 0.9 | | 1,1 | 2.4 | | | |
| AT9NW | Socket Weld JIS, ASME, DIN | 1/2" | 1,6 | 230 | 350 | 662 | 70 | | 18 | | 2.8 | | 0.7 | | Forged Steel A105 | 0,9 | 2.0 |
| | | 3/4" | | | | | 80 | 82 | 19 | 56 | 3.2 | 3.2 | 0.8 | 2.2 | | 1,0 | 2.2 |
| | | 1" | | | | | | | 23 | | 0.9 | | 1,1 | 2.4 | | | |
| AT9NF | Flanged JIS, ASME, DIN | 1/2" | 1,6 | 230 | 350 | 662 | 145* | 82 | 18 | | 5.7* | 3.2 | 0.7 | | Forged Steel A105 | 2,6 | 5.7 |
| | | 3/4" | | | | | | 19 | 56 | 0.8 | 2.2 | 3,4 | 7.5 | | | | |
| | | 1" | | | | | | 23 | | 0.9 | | 4,0 | 8.8 | | | | |

*On request also available with different face-to-face length

ADC1



ADL1

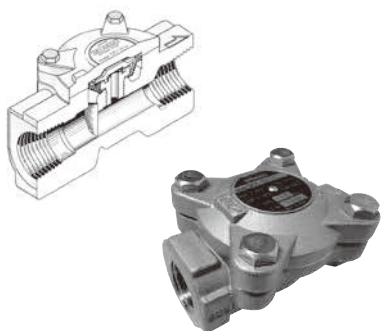




Dimensions

ADC1

ADC1-F





ADL1

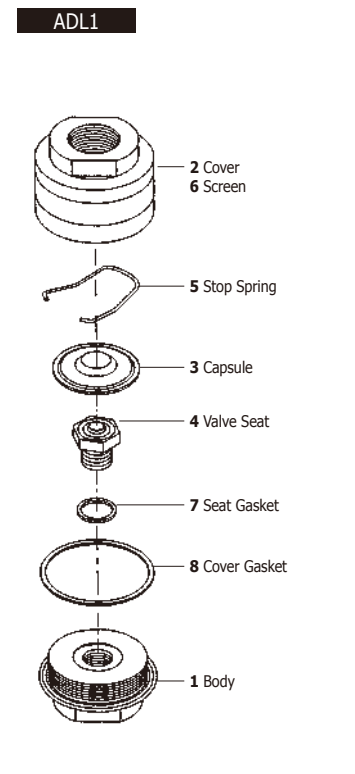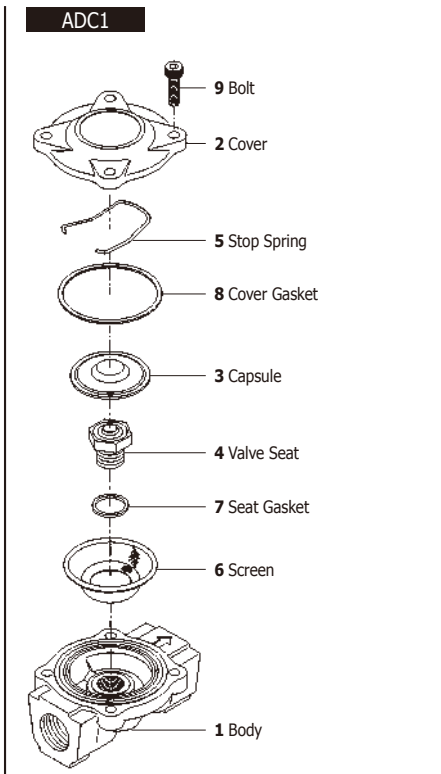

| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|--------------------------------------|---------------------------|------------|-------------------------|------|----------------------------|-----|-----------------|----------------|----------------|-----|--------------------------|----------------|----------------|-----|---------------------------|--------|-----|
| | | | MPa | psig | °C | °F | L | H ₁ | H ₂ | W | L | H ₁ | H ₂ | W | | kg | lb |
| ADC1-21H ADC1-21L | Screwed Rc, NPT | 1/4", 3/8" | 2,1 | 305 | 220 | 428 | 65 | 29 | 11 | 53 | 2.6 | 1.1 | 0.4 | 2.1 | Stainless Steel SCS13A | 0,4 | 0.9 |
| | | 1/2", 3/4" | | | | | 75 | 31 | 17 | | 3.0 | 1.2 | 0.7 | | | 0,5 | 1.1 |
| 1" | 80 | 34 | | | | | 21 | 3.1 | 1.3 | | 0.8 | 1,3 | 2.9 | | | | |
| ADC1-21HF ADC1-21LF | Flanged JIS, ASME, DIN | 1/2" | | | | | 150 | 31 | 17 | | 5.9 | 1.2 | 0.7 | | | 2,2 | 4.9 |
| | | 3/4" | | | | | 160 | 34 | 21 | | 6.3 | 1.3 | 0.8 | | | 3,1 | 6.8 |
| ADL1-21H ADL1-21L | Screwed Rc, NPT | 1/4" | 2,1 | 305 | 220 | 428 | 60 | 48 | 2.4 | 1.9 | Stainless Steel SCS13 | 0,7 | 1.5 | | | | |
| | | 3/8" | | | | | | | | | | | | | | | |
| | | 1/2" | | | | | | | | | | | | | | | |
| | | 3/4" | | | | | | | | | | | | | | | |
| ADL1-10C | Screwed Rc, NPT | 1" | 1,0 | 145 | 220 | 428 | 60 | 48 | 2.4 | 1.9 | Stainless Steel SCS13 | 0,7 | 1.5 | | | | |
| | | 1/4" | | | | | | | | | | | | | | | |
| | | 3/8" | | | | | | | | | | | | | | | |
| | | 1/2" | | | | | | | | | | | | | | | |

AT51

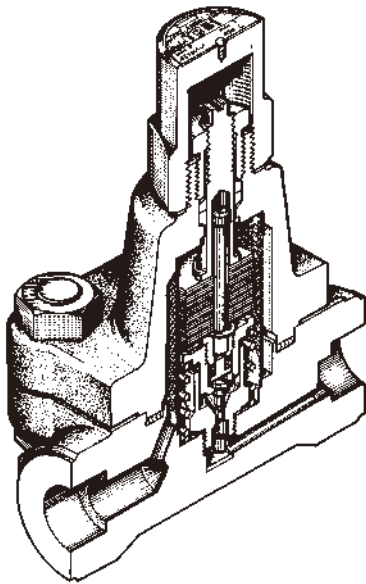


Screwed & Socket Weld




Flanged

AT51

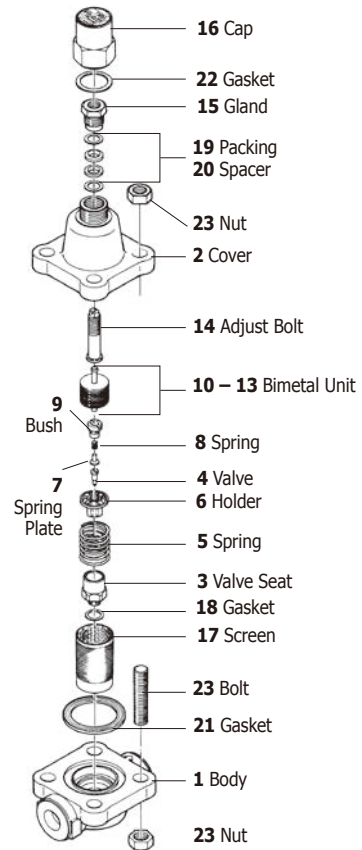

Dimensions

AT51 / AT51W



AT51F

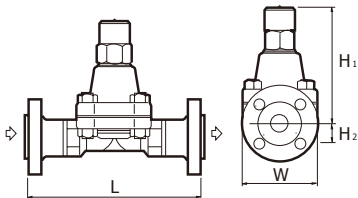


Table 1: Face-to-face dimensions / weights

| Size | JIS 20 K | | | | JIS 30 K | | | | JIS 40 K | | | | JIS 63 K | | | |
|------|----------|-----|-----|------|----------|-----|------|------|----------|-----|------|------|----------|-----|------|------|
| | mm | in | kg | lb | mm | in | kg | lb | mm | in | kg | lb | mm | in | kg | lb |
| ½" | 200 | 7.9 | 7,3 | 16.1 | 200 | 7.9 | 8,4 | 18.5 | 200 | 7.9 | 8,7 | 19.2 | 220 | 8.7 | 9,6 | 21.2 |
| ¾" | 210 | 8.3 | 7,7 | 17.0 | 210 | 8.3 | 8,9 | 19.6 | 210 | 8.3 | 9,2 | 20.3 | 230 | 9.1 | 11,1 | 24.5 |
| 1" | 240 | 9.5 | 9,2 | 20.3 | 240 | 9.5 | 10,1 | 22.3 | 240 | 9.5 | 10,5 | 23.2 | 240 | 9.5 | 12,1 | 26.7 |

| Size | ASME 150 lb | | | | ASME 300 lb | | | | ASME 600 lb | | | | ASME 900 lb | | | |
|------|-------------|-----|-----|------|-------------|-----|-----|------|-------------|-----|-----|------|-------------|-----|------|------|
| | mm | in | kg | lb | mm | in | kg | lb | mm | in | kg | lb | mm | in | kg | lb |
| ½" | 200 | 7.9 | 6,7 | 14.8 | 200 | 7.9 | 7,2 | 15.9 | 200 | 7.9 | 7,3 | 16.1 | 220 | 8.7 | 9,6 | 21.2 |
| ¾" | 210 | 8.3 | 7,7 | 17.0 | 230 | 9.1 | 8,2 | 18.1 | 230 | 9.1 | 8,5 | 18.7 | 230 | 9.1 | 10,9 | 24.0 |
| 1" | 240 | 9.5 | 8,3 | 18.3 | 240 | 9.5 | 9,4 | 20.7 | 240 | 9.5 | 9,6 | 21.2 | 240 | 9.5 | 13,3 | 29.3 |

| Size | DIN PN10 - PN40 | | | | DIN PN63 / PN100 | | | |
|------|-----------------|-----|------|------|------------------|-----|------|------|
| | mm | in | kg | lb | mm | in | kg | lb |
| DN15 | 210 | 8.3 | 9,4 | 20.7 | 210 | 8.3 | 9,4 | 20.7 |
| DN20 | 230 | 9.1 | 11,4 | 25.1 | 230 | 9.1 | 11,4 | 25.1 |
| DN25 | 230 | 9.1 | 12,5 | 27.6 | 230 | 9.1 | 12,5 | 27.6 |

| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | | | | | | | | | | | | |
|--------------|-------------|-------------------------------|-------------------------|------|----------------------------|-----|-----------------|----------------|----------------|----|-----------------|----------------|----------------|-----|---------------|----------------------|---------|---------|---------|-----|----|-----|---------|-----|-----|-----|---------|---------|
| | | | MPa | psig | °C | °F | L | H ₁ | H ₂ | W | L | H ₁ | H ₂ | W | | kg | lb | | | | | | | | | | | |
| AT51 | 45 65 | Screwed Rc, NPT | ½" - 1" | 4,5 | 653 | 425 | 800 | 130 | 155 | 25 | 100 | 5.1 | 6.1 | 1.0 | 3.9 | Forged Steel A105 | 5,7 | 12.6 | | | | | | | | | | |
| | | | | 6,5 | 943 | | | | | | | | | | | | | | | | | | | | | | | |
| AT51W | 45 65 | Socket Weld JIS, ASME, DIN | ½" - 1" | 4,5 | 653 | | | | | | | | | | | | | | Table 1 | 155 | 25 | 100 | Table 1 | 6.1 | 1.0 | 3.9 | Table 1 | Table 1 |
| | | | | 6,5 | 943 | | | | | | | | | | | | | | | | | | | | | | | |
| AT51F | 45 65 | Flanged JIS, ASME, DIN | ½" - 1" | 4,5 | 653 | | | Table 1 | 155 | 25 | 100 | Table 1 | 6.1 | 1.0 | 3.9 | | Table 1 | Table 1 | | | | | | | | | | |
| | | | | 6,5 | 943 | | | | | | | | | | | | | | | | | | | | | | | |

Pressure Reducing Valves


SERIES RE

Pressure Reducing Valves (PRV) are designed for regulating the downstream pressure and maintaining it within certain acceptable limits. Ideally, a PRV should provide constant downstream pressure while delivering the required flow, i.e. the PRV automatically adjusts the steam flow to meet the downstream system demand. Depending on the model, MIYAWAKI's pressure reducing valves are designed for steam, air, gases and liquids. MIYAWAKI is manufacturing three types of PRV:

- Direct acting pressure reducing valves
- Pilot operated pressure reducing valves
- Pressure reducing valves with a downstream pressure sensing line (pulse line)


Operating principle General

Direct Acting PRV



The direct acting PRV has 3 essential elements:
 A Main Valve Unit
 B Pressure Measuring Element (Bellows)
 C Adjust Spring

Changes in downstream pressure are sensed by the bellows, which expands or contracts depending on the pressure change. The movement of the bellows will be directly transferred to the spring, which will open or close the main valve, thus keeping the downstream pressure at a certain level.



Pilot Operated PRV

The pilot operated PRV has 4 essential elements:


- A Main Valve Unit
- B Pilot Valve (same structure as the direct-acting PRV)
- C Adjusting Unit (piston and cylinder liner)
- D Downstream pressure sensing line (pulse line)

Changes in downstream pressure are sensed by the pilot valve mechanism (bellows connected with a pilot valve unit) through a signal line D, which connects the pilot valve regulator with the secondary pressure side. Movement of the bellows will open or close the pilot valve, regulating the amount of steam influencing the movement of the piston, which will close or open the main valve, thus keeping downstream pressure on a stable level.


Pilot operated pressure reducing valves are used to improve accuracy and capacity, compared with direct acting pressure regulators. The decision whether to use a direct acting valve or a pilot operated valve depends on the demands of the steam using system.

Operating principle Pilot operated PRV


■ Inlet Steam Pressure
 ■ Secondary Steam Pressure
 ■ Adjusting Steam Pressure

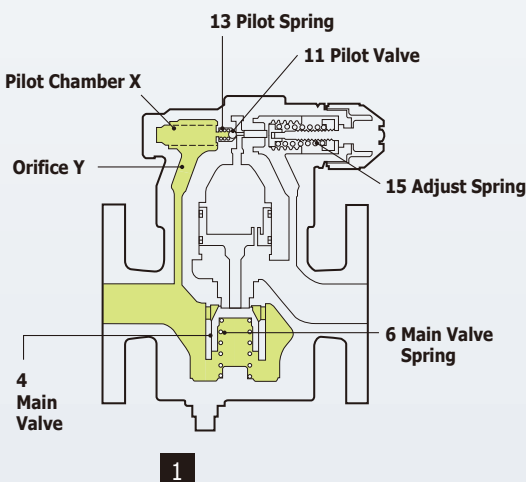

Before adjusting the secondary pressure the green handle must be turned clockwise to release the adjust spring (15) until the handle moves freely. In this position the main valve (4) is closed by the force of the spring (6) and the pilot valve (11) is closed by the force of the spring (13). When steam enters the valve, part of the steam enters the pilot chamber (X) through the orifice (Y).

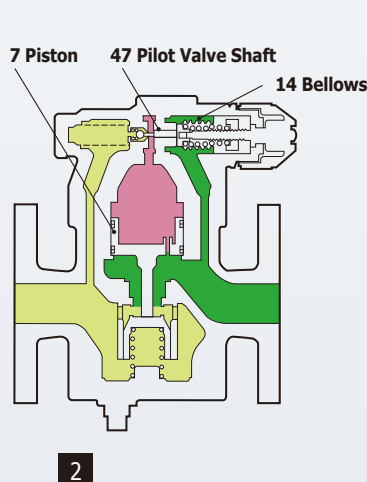


To adjust the secondary pressure the handle must be turned counterclockwise. As a result, the adjust spring (15) will be pressed into the bellows (14). The bellows will expand and the pilot valve shaft (47) will open the pilot valve (11). The steam, which has entered the pilot chamber (X) will flow through the pilot valve unit into the chamber above the piston (7). Due to the steam pressure the piston (7) will move downwards and open the main valve (4). Steam will flow towards the secondary side.

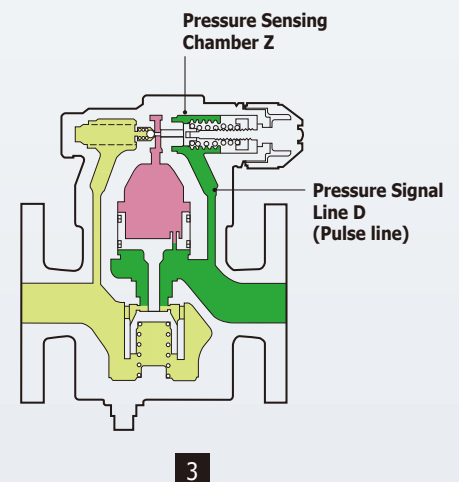


Part of the steam, which flows to the secondary side will enter the pressure sensing chamber (Z) through the pressure signal line (D). Due to the pressure influence, the bellows (14) will contract. Depending on the secondary pressure value the force exerted by the bellows and the force exerted by the adjust spring (15) will be balanced and the opening degree of the pilot valve (11) will be adjusted, thus regulating the amount of steam flowing through the pilot valve to the piston. Consequently, the opening degree of the main valve (4) will be also adjusted to regulate the steam flow in the direction of the secondary side maintaining a stable steam flow and steam pressure on the secondary side.

RE1




Capacity Chart RE1, RE1-4

Minimum Differential Pressure:
0,04 MPa (5.8 psig)

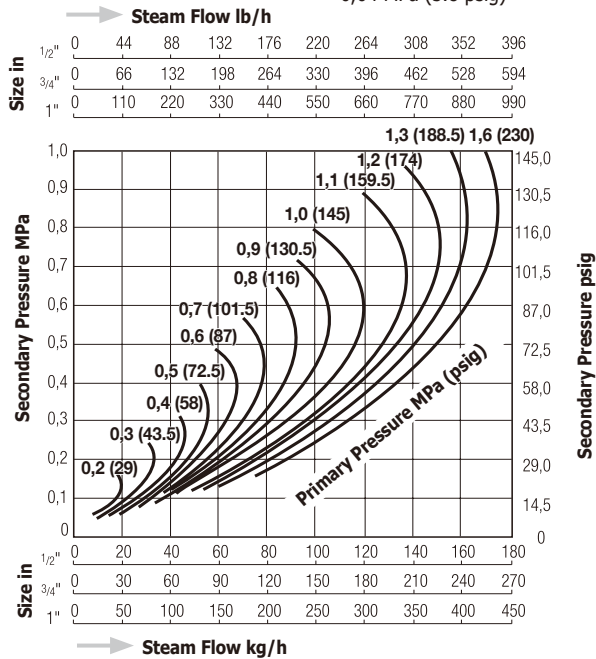


RE2




Capacity Chart RE2

Minimum Differential Pressure:
0,05 MPa (7.3 psig)

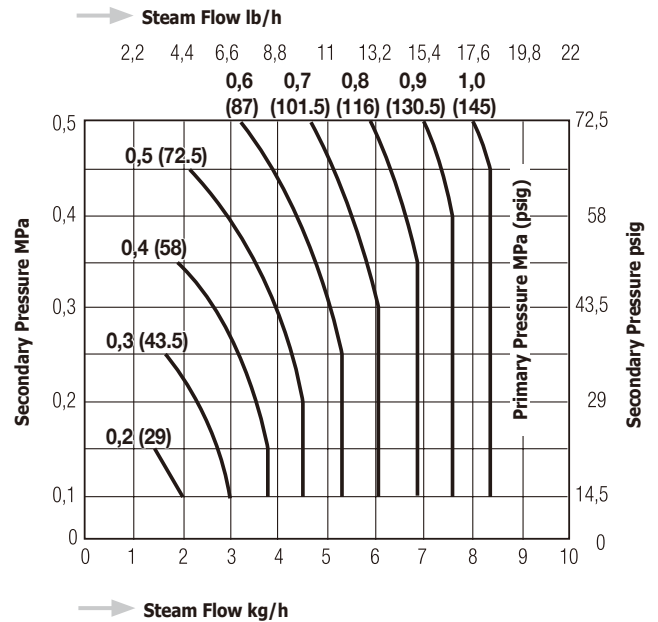


Capacity Chart RE1-2


Minimum Differential Pressure:
0,05 MPa (7.3 psig)

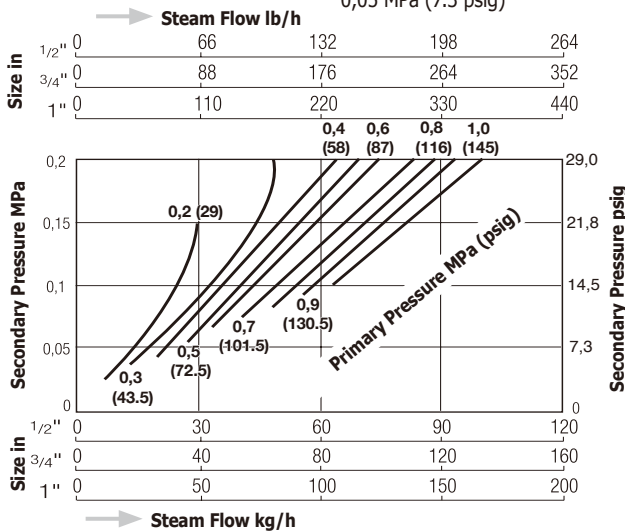

Dimensions RE1



Dimensions RE2





| Cv Values | Size (in) | RE1 & RE1-4 | RE1-2 | Kvs Values | Size (in) | RE1 & RE1-4 | RE1-2 |
|-----------|-----------|-------------|-------|------------|-----------|-------------|-------|
| | 1/2" | 1,2 | 1,9 | | 1/2" | 1,0 | 1,6 |
| | 3/4" | 1,9 | 1,9 | | 3/4" | 1,6 | 1,6 |
| | 1" | 3,2 | 2,1 | | 1" | 2,8 | 1,8 |

| Model | Connection | Size (in) | Operating Pressure (Primary) | | Secondary Pressure | | Max. Red. Pressure Ratio | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|-------|-----------------|-----------|------------------------------|------------|--------------------|-----------|--------------------------|----------------------------|-----|-----------------|-----|-----|-----|-----------------|-----|-----|-----|---------------|--------|-----|
| | | | MPa | psig | MPa | psig | | °C | °F | L | H1 | H2 | W | L | H1 | H2 | W | | kg | lb |
| RE1 | Screwed Rc, NPT | 1/2" | 0,2 - 1,6 | 29 - 230 | 0,05 - 1,0 | 7,3 - 145 | 10 : 1 | 204 | 399 | 80 | 137 | 46 | 65 | 3,2 | 5,4 | 1,8 | 2,6 | Brass C3771 | 1,4 | 3,1 |
| | | 90 | | | | | | | | 137 | 46 | 65 | 3,5 | 5,4 | 1,8 | 1,6 | | | 3,5 | |
| | | 105 | | | | | | | | 144 | 58 | 65 | 4,1 | 5,7 | 2,3 | 1,9 | | | 4,2 | |
| RE1-4 | | 1/2" | 0,2 - 1,0 | 29 - 145 | 0,05 - 0,4 | 7,3 - 58 | 10 : 1 | 204 | 399 | 80 | 137 | 46 | 65 | 3,2 | 5,4 | 1,8 | 2,6 | | 1,4 | 3,1 |
| | | 90 | | | | | | | | 137 | 46 | 65 | 3,5 | 5,4 | 1,8 | 1,6 | | | 3,5 | |
| | | 105 | | | | | | | | 144 | 58 | 65 | 4,1 | 5,7 | 2,3 | 1,9 | | | 4,2 | |
| RE1-2 | 1/2" | 0,2 - 1,0 | 29 - 145 | 0,02 - 0,2 | 2,9 - 29 | 10 : 1 | 204 | 399 | 80 | 137 | 46 | 65 | 3,2 | 5,4 | 1,8 | 2,6 | 1,4 | 3,1 | | |
| | 90 | | | | | | | | 137 | 46 | 65 | 3,5 | 5,4 | 1,8 | 1,6 | | 3,5 | | | |
| | 105 | | | | | | | | 144 | 58 | 65 | 4,1 | 5,7 | 2,3 | 1,9 | | 4,2 | | | |
| RE2 | | 3/8" | 0,2 - 1,0 | 29 - 145 | 0,1 - 0,5 | 14 - 72 | 10 : 1 | 184 | 363 | 50 | 89 | 31 | 43 | 2,0 | 3,5 | 1,2 | 1,7 | 0,56 | 1,2 | |

REC1

Capacity Chart REC1

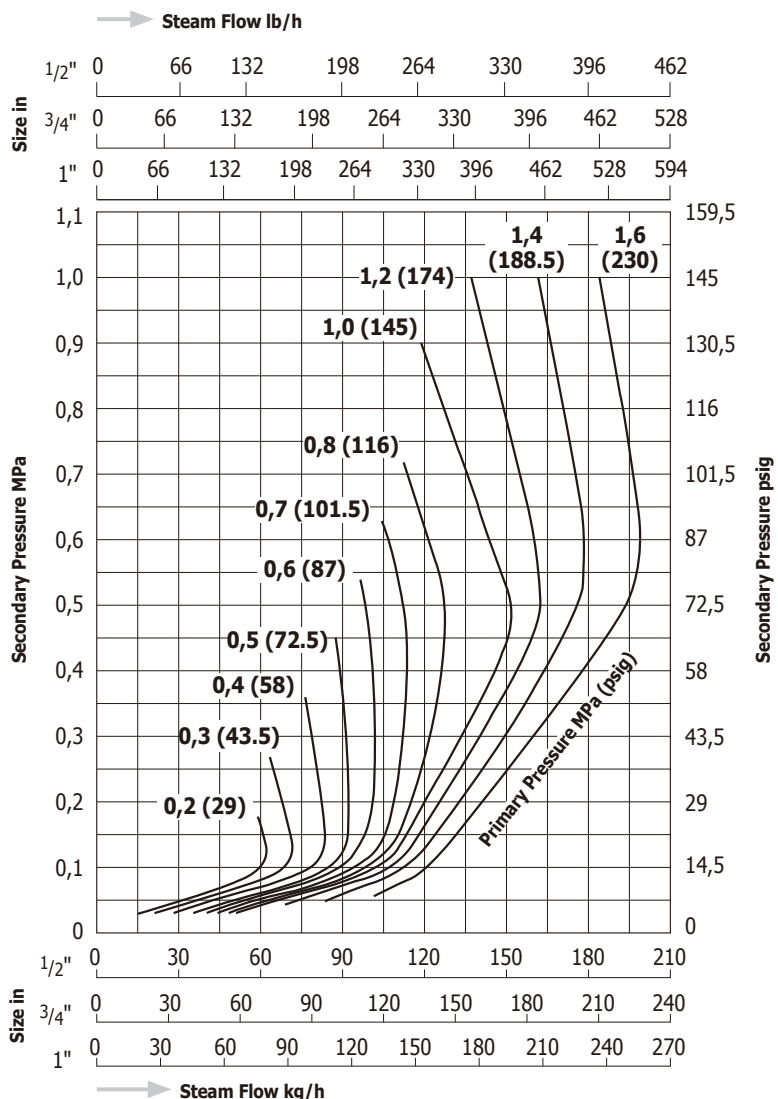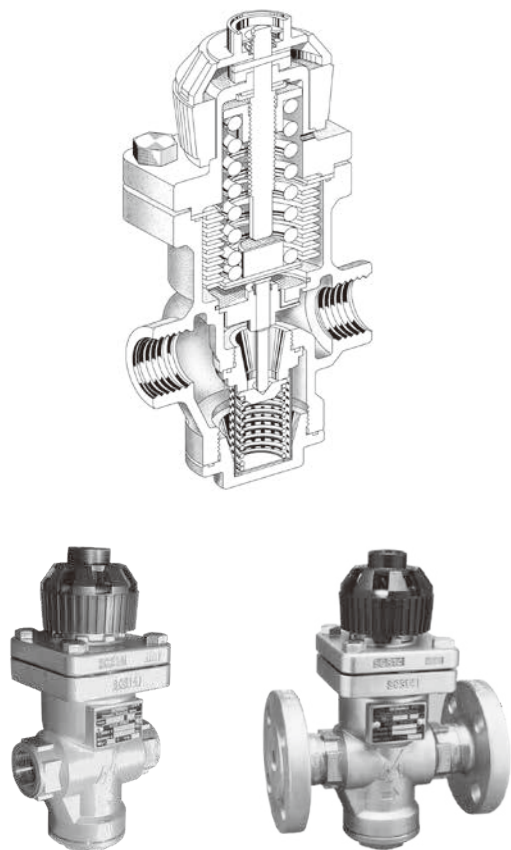





Minimum Differential Pressure:
more than 10 % of Operating Pressure

Body Material:
Stainless Steel SCS14/CF8M

Dimensions REC1 - Screwed


Dimensions REC1 - Flanged

| | Size (in) | REC1 |
|------------|-----------|------|
| Cv Values | 1/2" | 3,8 |
| | 3/4" | 4,0 |
| | 1" | 4,0 |
| Kvs Values | 1/2" | 3,3 |
| | 3/4" | 3,4 |
| | 1" | 3,4 |




| Model | Connections | Size (in) | Operating Pressure (Primary) | | Secondary Pressure | | Max. Red. Pressure Ratio | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Weight | | | | | | | | | | |
|----------|------------------------------|-----------|------------------------------|------------|--------------------|----------|--------------------------|----------------------------|-----|-----------------|----------------|----------------|----------|-----------------|----------------|----------------|-----|--------|-----|-----|------|-----|-----|-----|-----|-----|------|------|
| | | | MPa | psig | MPa | psig | | °C | °F | L | H ₁ | H ₂ | W | L | H ₁ | H ₂ | W | kg | lb | | | | | | | | | |
| REC1-2 | Screwed Rc, NPT, Rp | 1/2" - 1" | 0,2 - 1,6 | 29 - 230 | 0,02 - 0,2 | 2,9 - 29 | 30 : 1 | 220 | 428 | 96 | 138 | 63 | 78 | 3,8 | 5,4 | 2,5 | 3,1 | 2,9 | 6,4 | | | | | | | | | |
| REC1-6 | | 1/2" - 1" | 0,2 - 1,6 | 29 - 230 | 0,18 - 0,6 | 26 - 87 | 8,9 : 1 | | | | | | | | | | | 2,8 | 6,2 | | | | | | | | | |
| REC1-10 | | 1/2" - 1" | 0,6 - 1,6 | 87 - 230 | 0,54 - 1,0 | 78 - 145 | 3 : 1 | | | | | | | | | | | 2,8 | 6,2 | | | | | | | | | |
| REC1-2F | Flanged JIS, ASME, DIN | 1/2" | 0,2 - 1,6 | 29 - 230 | 0,02 - 0,2 | 2,9 - 29 | 30 : 1 | | | 220 | 428 | 150 | 138 | 63 | 78 | 5,9 | 5,4 | 2,5 | 3,1 | 4,5 | 9,9 | | | | | | | |
| | | 3/4" | | | | | | | | | | | | | | | | | | 5,1 | 11,2 | | | | | | | |
| | | 1" | | | | | | | | | | | | | | | | | | 5,9 | 13 | | | | | | | |
| REC1-6F | | 1/2" | | | | | | | | | | 0,2 - 1,6 | 29 - 230 | 0,18 - 0,6 | 26 - 87 | 8,9 : 1 | 220 | 428 | 150 | 138 | 63 | 78 | 5,9 | 5,4 | 2,5 | 3,1 | 4,5 | 9,9 |
| | | 3/4" | | | | | | | | | | | | | | | | | | | | | | | | | 5,1 | 11,2 |
| | | 1" | | | | | | | | | | | | | | | | | | | | | | | | | 5,9 | 13 |
| REC1-10F | 1/2" | 0,6 - 1,6 | 87 - 230 | 0,54 - 1,0 | 78 - 145 | 3 : 1 | 220 | | | 428 | 150 | | | | | | | | 138 | 63 | 78 | 5,9 | 5,4 | 2,5 | 3,1 | 4,5 | 9,9 | |
| | 3/4" | | | | | | | | | | | | | | | | | | | | | | | | | 5,1 | 11,2 | |
| | 1" | | | | | | | | | | | | | | | | | | | | | | | | | 5,9 | 13 | |

RE3

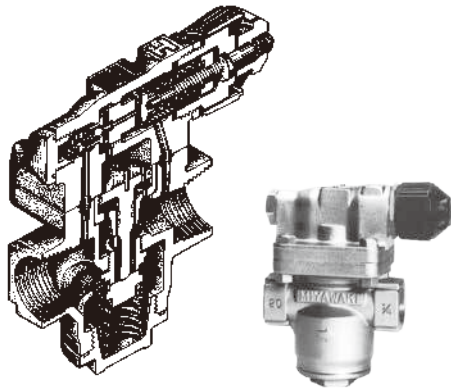


Body Material: Brass C3771

Dimensions RE3

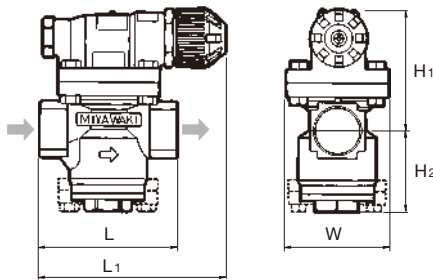

Minimum Differential Pressure:
0,07 MPa (10.2 psig)


Capacity Chart RE3

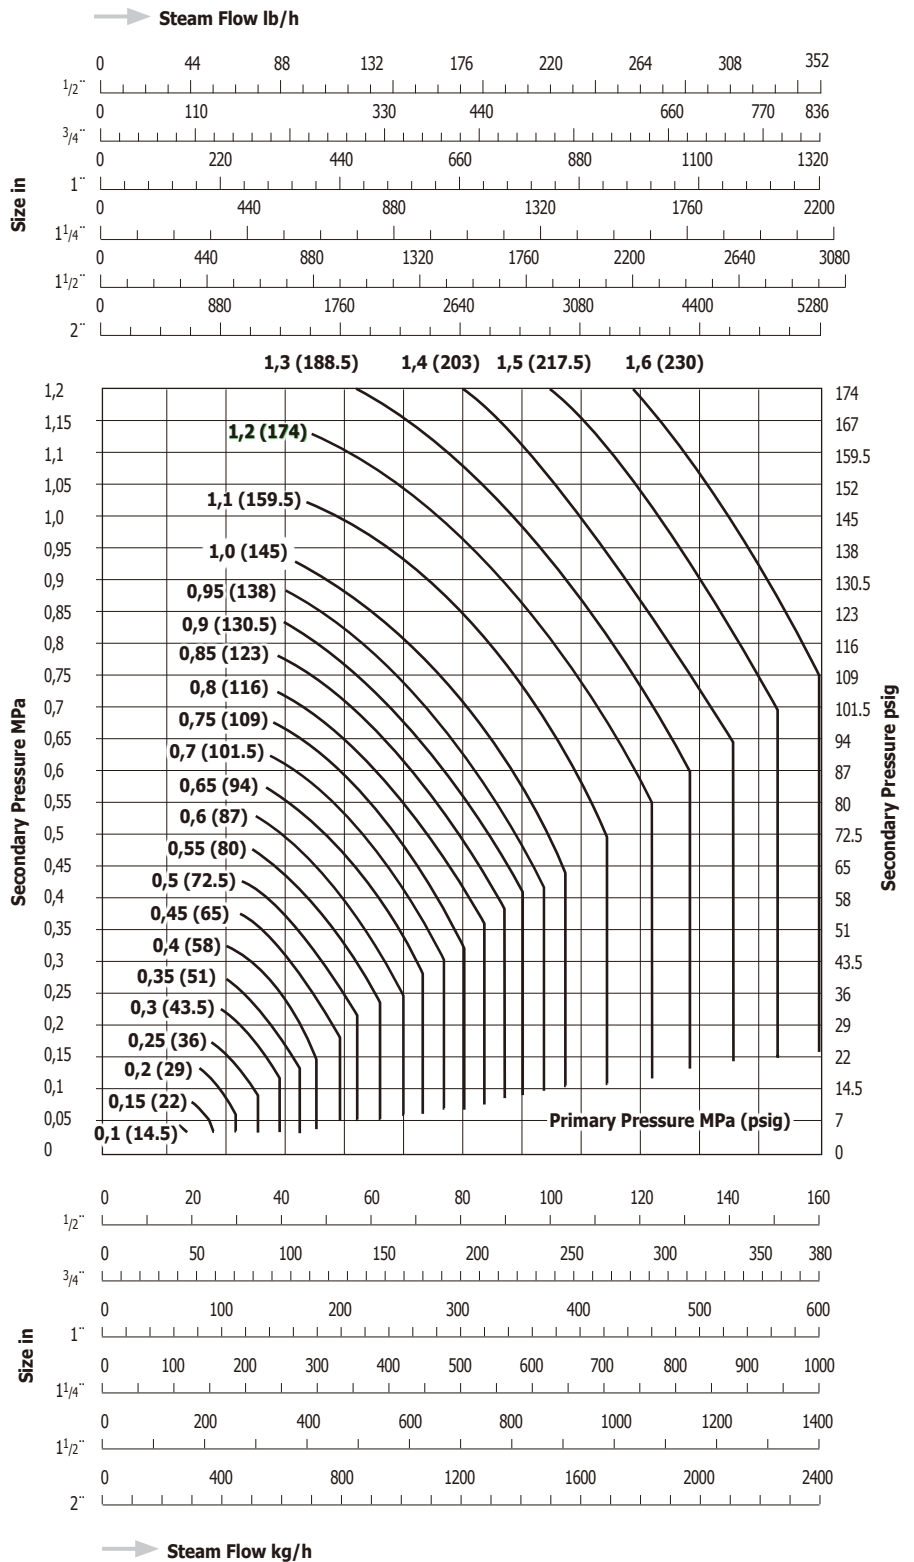


| Model | Connection | Size (in) | Operating Pressure (Primary) | | Secondary Pressure | | Max. Red. Pressure Ratio | Max. Oper. Temperature | | Dimensions (mm) | | | | | Dimensions (in) | | | | | Weight | | | | Values | | | |
|-------|-----------------|-----------|------------------------------|------------|--------------------|-----------|--------------------------|------------------------|-----|-----------------|----------------|----------------|----------------|-----|-----------------|----------------|----------------|----------------|-----|--------|------|------|------|--------|--|--|--|
| | | | MPa | psig | MPa | psig | | °C | °F | L | L ₁ | H ₁ | H ₂ | W | L | L ₁ | H ₁ | H ₂ | W | kg | lb | Cv | Kvs | | | | |
| RE3 | Screwed Rc, NPT | 1/2" | 0,1 - 1,6 | 14.5 - 230 | 0,03 - 1,2 | 4.4 - 174 | 20 : 1 | 220 | 428 | 90 | 127 | 87 | 58 | 74 | 3.5 | 5.0 | 3.4 | 2.3 | 2.9 | 2,8 | 6.2 | 0,8 | 0,7 | | | | |
| | | 95 | | | | | | | | 130 | 3.7 | | | | 5.1 | 2,9 | | | | 6.4 | 1,9 | 1,6 | | | | | |
| | | 100 | | | | | | | | 132 | 3.9 | | | | 5.2 | 3,0 | | | | 2,6 | | | | | | | |
| | | 1 1/4" | | | | | | | | 130 | 155 | 111 | 73 | 96 | 5.1 | 6.1 | 4.4 | 2.9 | 3.8 | 6,2 | 13.6 | 4,9 | 4,2 | | | | |
| | | 1 1/2" | | | | | | | | 130 | 155 | 111 | 73 | 96 | 5.1 | 6.1 | 4.4 | 2.9 | 3.8 | 6,3 | 13.9 | 6,8 | 5,9 | | | | |
| | | 2" | | | | | | | | 140 | 157 | 121 | 79 | 110 | 5.5 | 6.2 | 4.8 | 3.1 | 4.3 | 8,2 | 18.0 | 12,0 | 10,3 | | | | |

RE20 REH20 REC20


The model RE20 is a direct acting pressure reducing valve designed for use of steam. The valve provides a constant downstream pressure at a stable given inlet pressure and constant running flowrates. Changes in the upstream pressure and fluctuating steam consumption on the secondary side will result in variations in downstream pressure. The valve is not designed for dead-end services. Due to carefully selected springs a wide range of pressure applications is available. The pressure reducing valve can be delivered with ductile cast iron, cast steel or stainless steel housings. All important internal parts are manufactured in stainless steel. As option the valves can be equipped with a pressure gauge on the valve body. Maximum pressure reduction ratio: 25:1

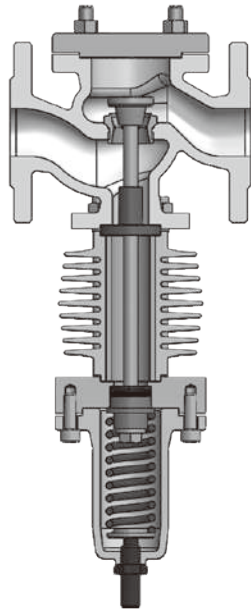

Size: DN 15 – 100


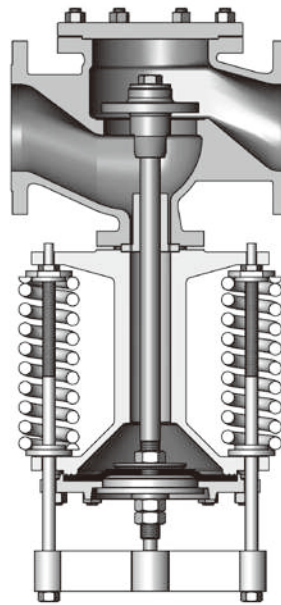


Size: DN 125 – 200

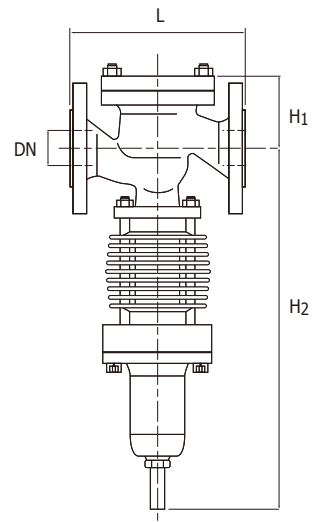


RE20L REH20L REC20L


The model RE20L is a pressure reducing valve with a downstream pressure sensing line (pulse line) designed for use of steam. The valve provides a precise downstream pressure even at changing inlet pressures. Due to carefully selected springs a wide range of pressure applications is available. The valve is very well suited to intermittent or fluctuating loads at the secondary side. It closes securely when the load on the secondary side will be zero. The pressure reducing valve can be delivered with ductile cast iron, cast steel or stainless steel housings. All important internal parts are manufactured in stainless steel. As option the valves can be equipped with a pressure gauge on the valve body. Maximum pressure reduction ratio: 25:1

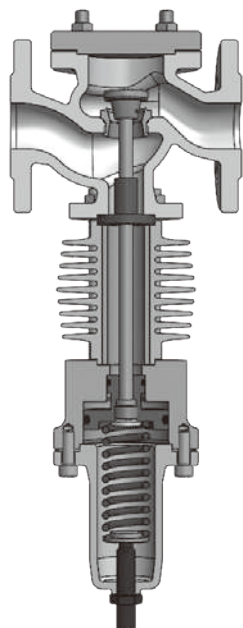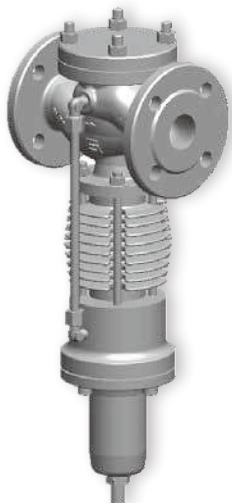

Size: DN 15 – 100

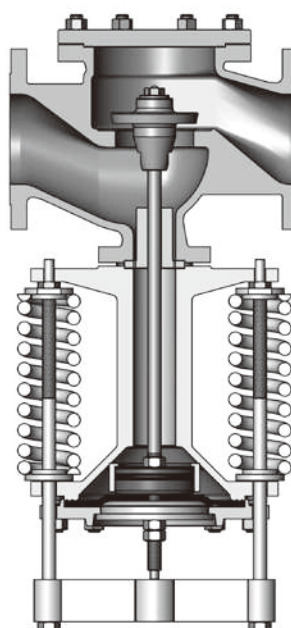

Size: DN 125 – 200

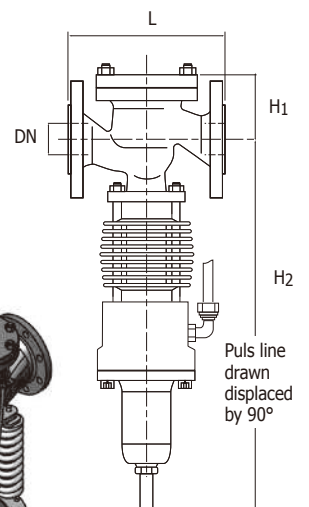

RE20 & RE20L

Body material

| RE20 / RE20L | REH20 / REH20L | REH20-M / REH20L-M | REC20 / REC20L |
|--|---|---------------------------------------|---|
| PN16 & PN25 | PN40 | PN63 & PN100 | PN40 |
| Ductile Cast Iron EN-GJS-400-15 (GGG-40, 0.7040) | Cast Steel GP240GH (GS-C25, 1.0619) | Cast Steel G17CrMo 5-5 (1.7357) | Stainless Steel GX5CrNiMo19-11-2 (1.4408) |

Body design conditions

| | | RE20 / RE20L | | REH20 / REH20L | REH20-M / REH20L-M | | REC20 / REC20L |
|---------------------------------|-----|--------------|------|----------------|--------------------|-------|----------------|
| | | PN16 | PN25 | PN40 | PN63 | PN100 | PN40 |
| Max. design pressure (MPa) | PMA | 1,6 | 2,5 | 4,0 | 6,3 | 10,0 | 4,0 |
| Max. design temperature (°C) | TMA | 350 | 350 | 400 | 530 | 530 | 400 |
| Max. operating pressure (MPa) | PMO | 1,5 | 2,2 | 2,8 | 5,7 | 8,4 | 2,9 |
| Max. operating temperature (°C) | TMO | 350 | 350 | 400 | 530 | 530 | 400 |

Pressure – Temperature rating

| PN | Body material | Temperature °C | | | | | | | | | | |
|-----|---------------|----------------|------|------|------|-----|-----|-----|-----|-----|-----|-----|
| | | -10... +50 | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 530 |
| | | Pressure MPa | | | | | | | | | | |
| 16 | 0.7040 | 1,6 | 1,6 | 1,6 | 1,5 | 1,4 | 1,3 | 1,1 | | | | |
| 25 | 0.7040 | 2,5 | 2,5 | 2,4 | 2,3 | 2,2 | 2,0 | 1,8 | | | | |
| 40 | 1.0619 | 4,0 | 3,7 | 3,5 | 3,1 | 2,8 | 2,6 | 2,4 | 2,3 | | | |
| | 1.4408 | 4,0 | 3,7 | 3,4 | 3,1 | 2,9 | 2,8 | 2,7 | 2,6 | | | |
| 63 | 1.0619 | 6,3 | 5,9 | 5,5 | 4,9 | 4,5 | 4,1 | 3,8 | 3,6 | | | |
| | 1.7357 | 6,3 | 6,3 | 6,3 | 6,3 | 6,2 | 5,7 | 5,3 | 5,0 | 4,8 | 3,8 | 2,2 |
| 100 | 1.0619 | 10,0 | 9,3 | 8,7 | 7,8 | 7,1 | 6,4 | 6,0 | 5,8 | | | |
| | 1.7357 | 10,0 | 10,0 | 10,0 | 10,0 | 9,8 | 9,1 | 8,4 | 8,0 | 7,6 | 6,1 | 3,5 |

Available secondary pressure ranges

| Downstream pressure range MPa | RE20 REH20 REC20 | RE20L REH20L REC20L |
|----------------------------------|------------------------|---------------------------|
| | < 0,05 | on request |
| 0,05 – 0,1 | ✓ | ✓ |
| 0,1 – 0,16 | ✓ | ✓ |
| 0,16 – 0,25 | ✓ | ✓ |
| 0,25 – 0,4 | ✓ | ✓ |
| 0,4 – 0,63 | ✓ | ✓ |
| 0,63 – 1,0 | ✓ | ✓ |
| 1,0 – 1,6 | ✓ | on request |
| > 1,6 | on request | |

Minimum differential pressure:
0,05 MPa (DN15-50), 0,07 MPa (DN65-125), 0,1 MPa (DN150-200)

Dimensions & Weights

| Size (DN) | Model RE20 (REH20, REC20) | | | | | | | Model RE20L (REH20L, REC20L) | | | | | | | Kvs Value |
|-----------|---------------------------|----------|-----|-----|-------------|--------|--------|------------------------------|----------|-----|-----|-------------|--------|--------|-----------|
| | Dimensions (mm) | | | | Weight (kg) | | | Dimensions (mm) | | | | Weight (kg) | | | |
| | L | | H1 | H2 | 0.7040 | 1.0619 | 1.4408 | L | | H1 | H2 | 0.7040 | 1.0619 | 1.4408 | |
| | PN16-40 | PN63-100 | | | | | | PN16-40 | PN63-100 | | | | | | |
| 15 | 130 | 210 | 90 | 435 | 11,4 | 12,0 | 12,0 | 130 | 210 | 90 | 435 | 13,0 | 14,5 | 14,5 | 8,0 |
| 20 | 150 | 230 | | | 11,4 | 12,0 | 12,0 | 150 | 230 | | | 13,0 | 14,5 | 14,5 | 11,0 |
| 25 | 160 | 230 | | | 12,5 | 13,0 | 13,0 | 160 | 230 | | | 14,5 | 16,5 | 16,5 | 12,0 |
| 32 | 180 | 260 | 120 | 455 | 14,5 | 16,0 | 16,0 | 180 | 260 | 120 | 455 | 16,0 | 18,5 | 18,5 | 12,0 |
| 40 | 200 | 260 | | | 16,0 | 18,0 | 18,0 | 200 | 260 | | | 18,0 | 22,0 | 22,0 | 14,0 |
| 50 | 230 | 300 | 130 | 605 | 35,0 | 37,5 | 37,5 | 230 | 300 | 130 | 605 | 34,0 | 37,5 | 37,5 | 63,0 |
| 65 | 290 | 340 | 155 | 635 | 39,5 | 43,0 | 43,0 | 290 | 340 | 155 | 635 | 45,0 | 49,0 | 49,0 | 92,0 |
| 80 | 310 | 380 | 180 | 800 | 52,5 | 58,0 | 58,0 | 310 | 380 | 180 | 800 | 61,0 | 65,0 | 65,0 | 113,0 |
| 100 | 350 | 430 | | | 825 | 68,0 | 77,0 | 77,0 | 350 | | | 430 | 825 | 87,0 | 91,0 |
| 125 | 400 | | 190 | 715 | 120,0 | 120,0 | 120,0 | 400 | | 190 | 715 | 128,0 | 139,0 | 139,0 | 196,0 |
| 150 | 480 | | 200 | 720 | 183,0 | 183,0 | 183,0 | 480 | | 200 | 720 | 172,0 | 183,0 | 183,0 | 321,0 |
| 200 | 600 | | 275 | 950 | 358,0 | 358,0 | 358,0 | 600 | | 275 | 950 | 302,0 | 343,0 | 343,0 | 483,0 |


Connections: Flanged EN-DIN1092, ASME B16.5 (for ductile cast iron, PN25 only ≤ DN80, 300# only 1/2" and 1 1/4" - 3") available

For leakage class 4 acc. to ANSI order with soft sealing


For more information see the special MIYAWAKI leaflet.

REA20 REAH20 REAC20


The model REA20 is a direct acting pressure reducing valve designed for use of compressible media, such as air and various gases and for incompressible media such as water, oil and others. The valve provides a constant downstream pressure at a stable given inlet pressure and constant running flowrates. Changes in the upstream pressure and fluctuating consumption on the secondary side will result in variations in downstream pressure. The valve is not designed for dead-end services. Due to carefully selected springs a wide range of pressure applications is available. The pressure reducing valve can be delivered with ductile cast iron, cast steel or stainless steel housings. All important internal parts are manufactured in stainless steel. Depending on the medium the valve can be equipped with soft sealing or metal sealing valves/seats. As option the valves can be equipped with a pressure gauge on the valve body. Maximum pressure reduction ratio: 25:1

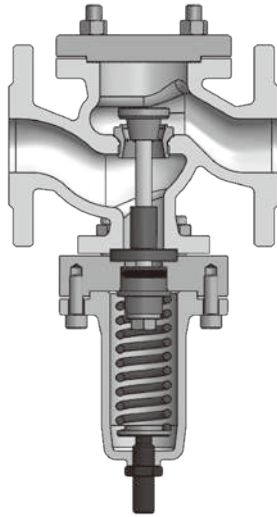

Size: DN 15 – 100


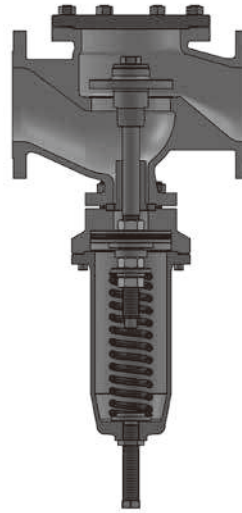


Size: DN 125 – 200

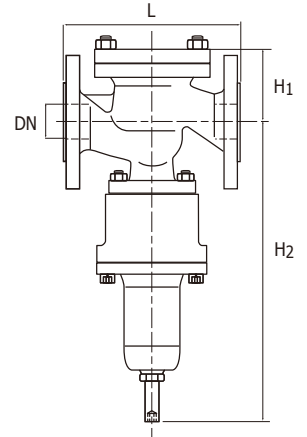


REA20L REAH20L REAC20L


The model REA20L is a pressure reducing valve designed for use of compressible media, such as air and various gases and for incompressible media such as water, oil and others. Due to the use of a downstream pressure sensing line (pulse line) the valve provides a constant accurate downstream pressure. Carefully selected springs secure a wide range of downstream pressure applications. The pressure reducing valve can be delivered with ductile cast iron, cast steel or stainless steel housings. All important internal parts are manufactured in stainless steel. The valve is designed for dead-end services. In case of zero consumption on the secondary side the valve closes reliably. Depending on the medium the valve can be equipped with soft sealing or metal sealing valves/seats. As option the valves can be equipped with pressure gauges. Maximum pressure reduction ratio: 25:1

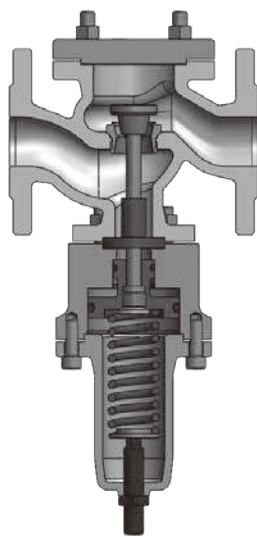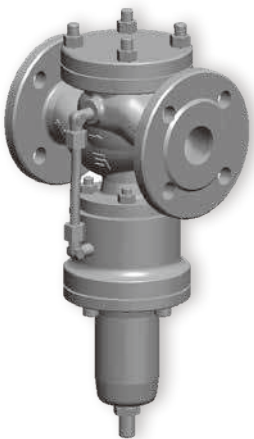

Size: DN 15 – 100

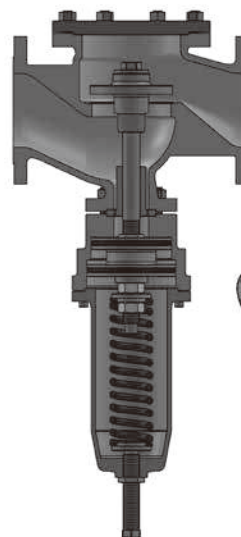

Size: DN 125 – 200

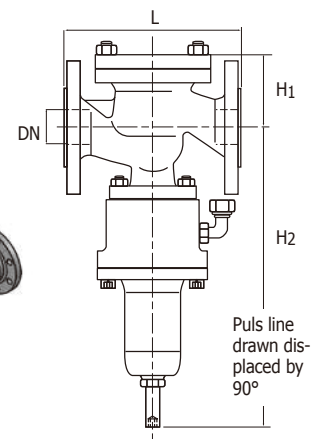

- Usable for the following gases :

Acetylene, Ammonia, Argon, Carbon dioxide, Carbon monoxide, Chlorine, Coal gas, Hydrogen, Ethylene, Helium, Methane, Nitrogen, Oxygen*, Sulphur dioxide

Others may be possible as well. Please ask MIYAWAKI Inc. or an authorized representative for more detail.

- Special cleaning to make the product oil-free / grease-free is available at an additional cost.

*** Special cleaning is mandatory for oxygen applications.**

REA20 & REA20L

Body material

| REA20 / REA20L | REAH20 / REAH20L | REAH20-M / REAH20L-M | REAC20 / REAC20L |
|--|---|---------------------------------------|---|
| PN16 & PN25 | PN40 | PN63 & PN100 | PN40 |
| Ductile Cast Iron EN-GJS-400-15 (GGG-40, 0.7040) | Cast Steel GP240GH (GS-C25, 1.0619) | Cast Steel G17CrMo 5-5 (1.7357) | Stainless Steel GX5CrNiMo19-11-2 (1.4408) |

Body design conditions

| | | REA20 / REA20L | | REAH20 / REAH20L | REAH20-M / REAH20L-M | | REAC20 / REAC20L |
|-------------------------------|-----|----------------|------|------------------|----------------------|-------|------------------|
| | | PN16 | PN25 | PN40 | PN63 | PN100 | PN40 |
| Max. design pressure (MPa) | PMA | 1,6 | 2,5 | 4,0 | 6,3 | 10,0 | 4,0 |
| Max. design temperature (°C) | TMA | 350 | 350 | 400 | 530 | 530 | 400 |
| Max. operating pressure (MPa) | PMO | 1,6 | 2,5 | 4,0 | 6,3 | 10,0 | 4,0 |

The max. operating temperature (°C) TMO depends for all on the O-Ring material: 120 °C with NBR, 130 °C with EPDM, 200 °C with FKM.

Pressure – Temperature rating

| PN | Body material | Temperature °C | | | | | | | | | | |
|-----|---------------|----------------|------|------|------|-----|-----|-----|-----|-----|-----|-----|
| | | -10... +50 | 100 | 150 | 200 | 250 | 300 | 350 | 400 | 450 | 500 | 530 |
| | | Pressure MPa | | | | | | | | | | |
| 16 | 0.7040 | 1,6 | 1,6 | 1,6 | 1,5 | 1,4 | 1,3 | 1,1 | | | | |
| 25 | 0.7040 | 2,5 | 2,5 | 2,4 | 2,3 | 2,2 | 2,0 | 1,8 | | | | |
| 40 | 1.0619 | 4,0 | 3,7 | 3,5 | 3,1 | 2,8 | 2,6 | 2,4 | 2,3 | | | |
| | 1.4408 | 4,0 | 3,7 | 3,4 | 3,1 | 2,9 | 2,8 | 2,7 | 2,6 | | | |
| 63 | 1.0619 | 6,3 | 5,9 | 5,5 | 4,9 | 4,5 | 4,1 | 3,8 | 3,6 | | | |
| | 1.7357 | 6,3 | 6,3 | 6,3 | 6,3 | 6,2 | 5,7 | 5,3 | 5,0 | 4,8 | 3,8 | 2,2 |
| 100 | 1.0619 | 10,0 | 9,3 | 8,7 | 7,8 | 7,1 | 6,4 | 6,0 | 5,8 | | | |
| | 1.7357 | 10,0 | 10,0 | 10,0 | 10,0 | 9,8 | 9,1 | 8,4 | 8,0 | 7,6 | 6,1 | 3,5 |

Available secondary pressure ranges

| Downstream pressure range MPa | REA20 REAH20 REAC20 | REA20L REAH20L REAC20L |
|----------------------------------|---------------------------|------------------------------|
| | < 0,05 | on request |
| 0,05 – 0,1 | ✓ | ✓ |
| 0,1 – 0,16 | ✓ | ✓ |
| 0,16 – 0,25 | ✓ | ✓ |
| 0,25 – 0,4 | ✓ | ✓ |
| 0,4 – 0,63 | ✓ | ✓ |
| 0,63 – 1,0 | ✓ | ✓ |
| 1,0 – 1,6 | ✓ | on request |
| > 1,6 | on request | |

Minimum differential pressure:
0,05 MPa (DN15-50), 0,07 MPa (DN65-125), 0,1 MPa (DN150-200)

Dimensions & Weights


| Size (DN) | Model REA20 (REAH20, REAC20) | | | | | | | Model REA20L (REAH20L, REAC20L) | | | | | | | Kvs Value |
|-----------|------------------------------|----------|-----|-----|-------------|--------|--------|---------------------------------|----------|-----|-----|-------------|--------|--------|-----------|
| | Dimensions (mm) | | | | Weight (kg) | | | Dimensions (mm) | | | | Weight (kg) | | | |
| | L | | H1 | H2 | 0.7040 | 1.0619 | 1.4408 | L | | H1 | H2 | 0.7040 | 1.0619 | 1.4408 | |
| | PN16-40 | PN63-100 | | | | | | PN16-40 | PN63-100 | | | | | | |
| 15 | 130 | 210 | 90 | 310 | 10,5 | 12,5 | 12,5 | 130 | 210 | 90 | 310 | 10,5 | 12,5 | 12,5 | 8,0 |
| 20 | 150 | 230 | | | 10,5 | 12,5 | 12,5 | 150 | 230 | | | 10,5 | 12,5 | 12,5 | 11,0 |
| 25 | 160 | 230 | | | 12,0 | 13,5 | 13,5 | 160 | 230 | | | 12,0 | 13,5 | 13,5 | 12,0 |
| 32 | 180 | 260 | 120 | 330 | 14,5 | 16,0 | 16,0 | 180 | 260 | 120 | 330 | 14,5 | 16,0 | 16,0 | 12,0 |
| 40 | 200 | 260 | | | 15,5 | 18,5 | 18,5 | 200 | 260 | | | 15,5 | 18,5 | 18,5 | 14,0 |
| 50 | 230 | 300 | 130 | 435 | 28,5 | 32,5 | 32,5 | 230 | 300 | 130 | 435 | 28,5 | 32,5 | 32,5 | 63,0 |
| 65 | 290 | 340 | 155 | 465 | 37,0 | 40,0 | 40,0 | 290 | 340 | 155 | 465 | 37,0 | 40,0 | 40,0 | 92,0 |
| 80 | 310 | 380 | 180 | 630 | 56,5 | 66,0 | 66,0 | 310 | 380 | 180 | 630 | 56,5 | 66,0 | 66,0 | 113,0 |
| 100 | 350 | 430 | | | 65,5 | 69,0 | 78,0 | 78,0 | 350 | | | 430 | 65,5 | 69,0 | 78,0 |
| 125 | 400 | | 210 | 660 | 120,0 | 120,0 | 120,0 | 400 | | 210 | 660 | 133,0 | 141,0 | 141,0 | 196,0 |
| 150 | 480 | | 235 | 680 | 183,0 | 183,0 | 183,0 | 480 | | 235 | 680 | 158,0 | 184,0 | 184,0 | 321,0 |
| 200 | 600 | | 285 | 740 | 358,0 | 358,0 | 358,0 | 600 | | 285 | 740 | 268,0 | 298,0 | 298,0 | 483,0 |

Connections: Flanged EN-DIN1092, ASME B16.5 (for ductile cast iron, PN25 only ≤ DN80, 300# only 1/2" and 1 1/4" - 3") available


For leakage class 4 acc. to ANSI order with soft sealing

For more information see the special MIYAWAKI leaflet.


RE1

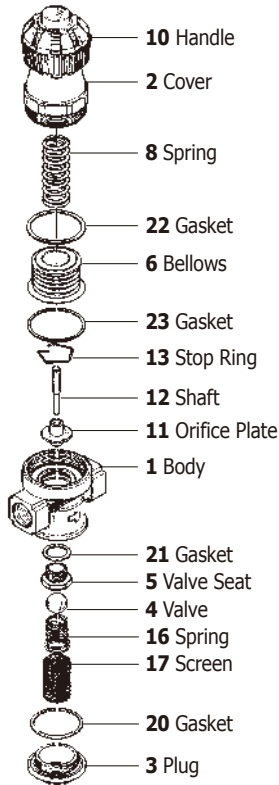



REC1

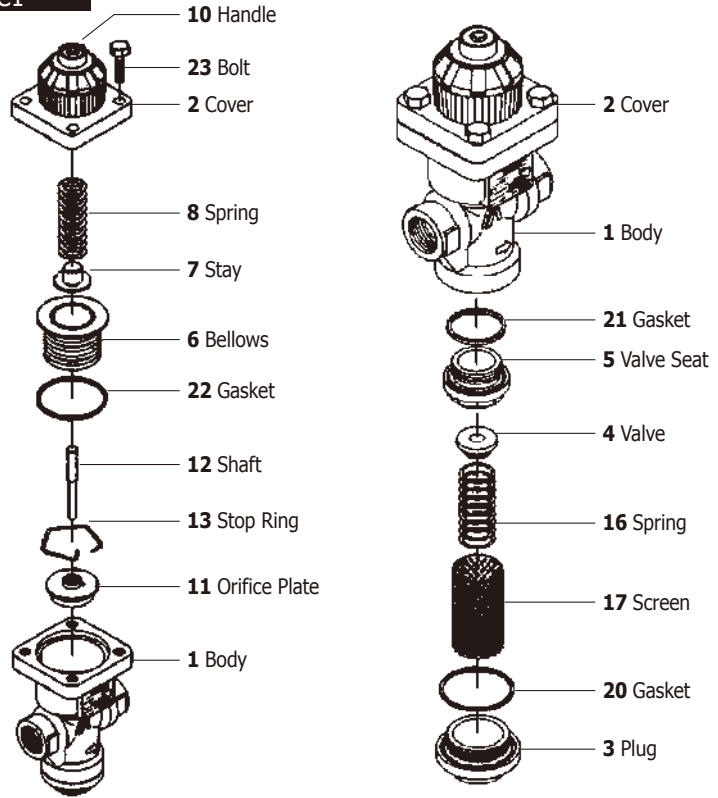

RE3

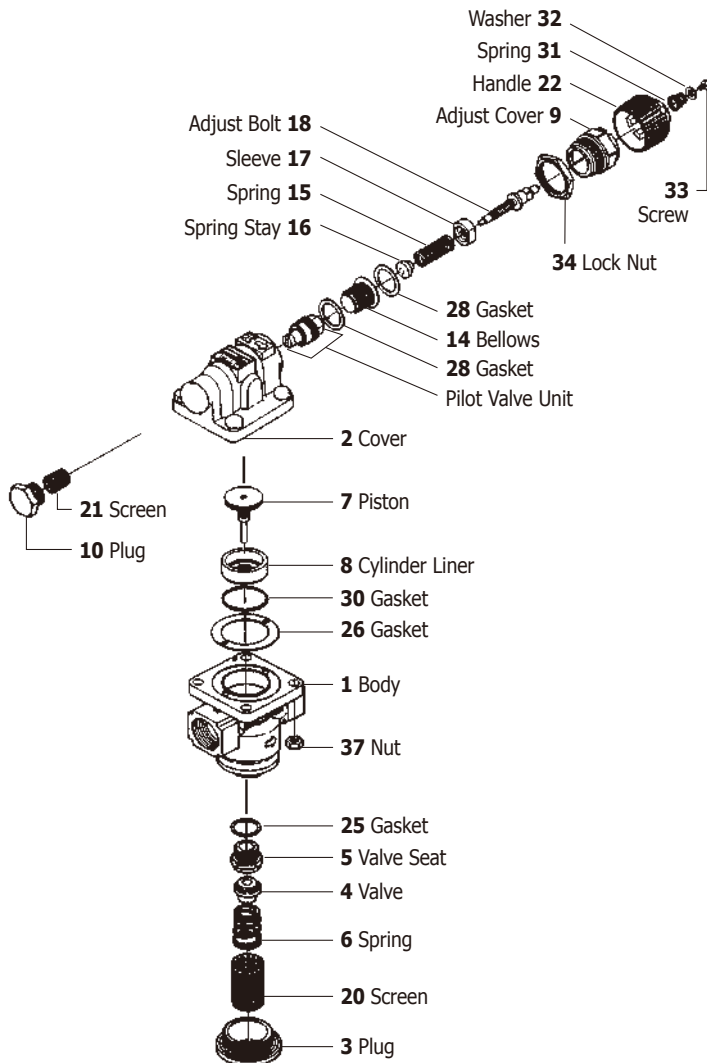

RE10N

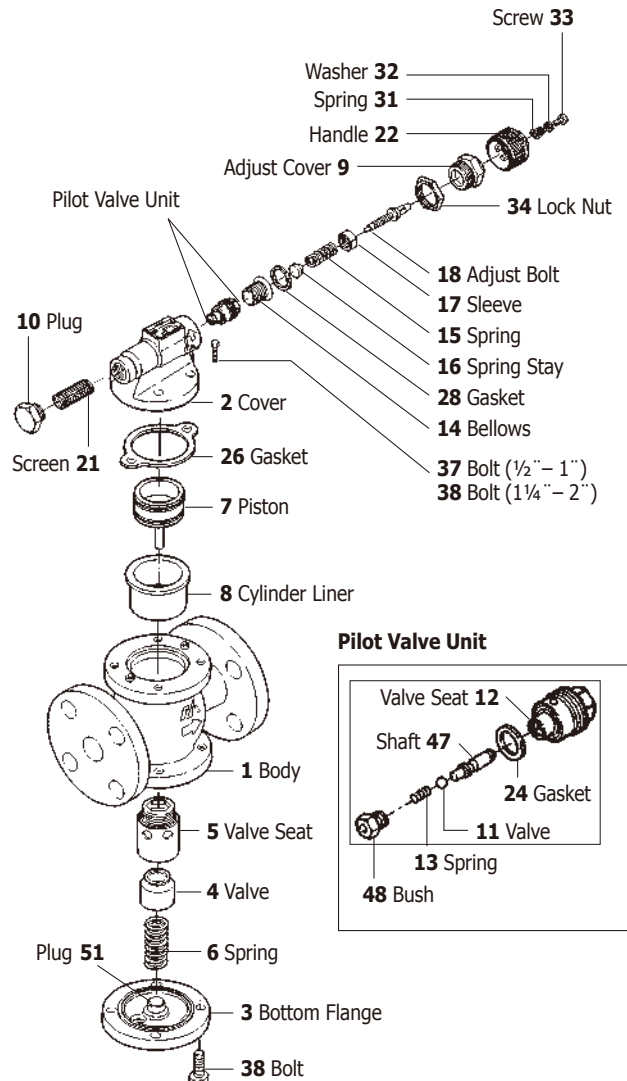

Manifold Series

SERIES MANIFOLD

Manifold

Miyawaki MM__P & FMM__ series is a piping package for steam distribution and condensate collection that simplifies your steam system management. The compact design is aimed to reduce the installation space and organize the system.

Features

-Compact design

Reduce the installation space and organize the system.

-Easy handling

Installation, maintenance and replacement is simple that lead to easy inspection and lower labour cost.

In combination with two-bolts connectors, steam traps with two-bolts connection can be installed and replaced without disassembling the manifold (package) unit.

-Pressure Equipment Directive (PED) Certified

Suitable for


Suitable for steam distribution and condensate collection that simplifies your steam management.

Installation Example

Forged Steel




Steam Manifold




Steam Condensate Manifold

Fabricated Steel




Steam Manifold



Steam Condensate Manifold


Manifold

Forged Steel

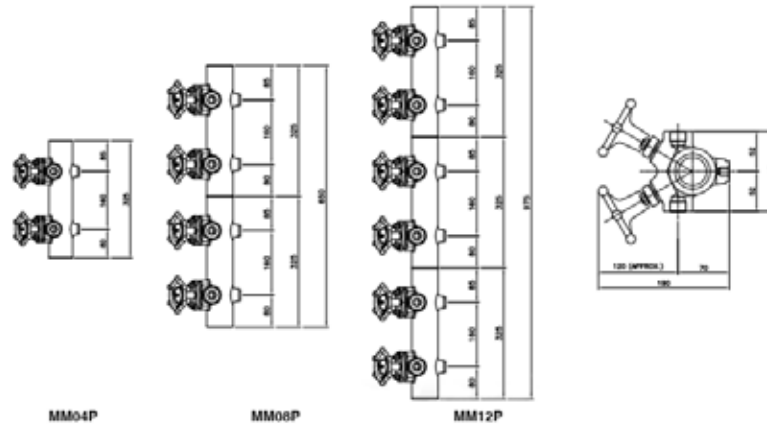

| Model | Integrated Valve | Max. Allowable Pressure (PMA) | Max. Allowable Temperature (TMA) | Body Inlet/Outlet Size | Connection Type | Number of Connection | Connection Size | Min. Allowable Temp. | Hydrotest Pressure | Kv Values | Body Material | Approx. Weight |
|-------|------------------|-------------------------------|----------------------------------|------------------------|----------------------------------|----------------------|-----------------|----------------------|--------------------|--------------------|-------------------|----------------|
| | | MPa | °C | | | | | °C | | | | MPa |
| MM04P | Piston Valve | 5.17 | 425 | 1-1/2", SW | NPT, SW (ASME B16.11 Class 3000) | 4 | 1/2", 3/4" | -29 | 7.75 | 2.0 for each valve | Forged Steel A105 | 10 |
| MM08P | | | | | | 8 | | | | | | 20 |
| MM12P | | | | | | 12 | | | | | | 30 |

Fabricated Steel

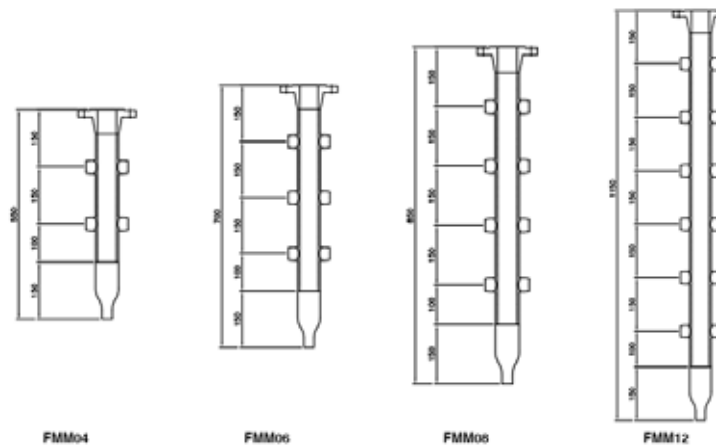

| Model | Integrated Valve | Max. Allowable Pressure (PMA) | Max. Allowable Temperature (TMA) | Body Inlet/Outlet Size | Connection Type | Number of Connection | Connection Size | Min. Allowable Temp. | Hydrotest Pressure | Body Material | Approx. Weight |
|-------|------------------|-------------------------------|----------------------------------|------------------------|----------------------------------|----------------------|-----------------|----------------------|--------------------|-------------------------|----------------|
| | | MPa | °C | | | | | °C | | | kg |
| FMM04 | - | 4.26 | 425 | 1/2" - 2" | NPT, SW (ASME B16.11 Class 3000) | 4 | 1/2", 3/4" | -29 | 6.39 | Fabricated Steel A106-B | 11 |
| FMM06 | | | | | | 6 | | | | | 15 |
| FMM08 | | | | | | 8 | | | | | 18 |
| FMM10 | | | | | | 10 | | | | | 23 |
| FMM12 | | | | | | 12 | | | | | 26 |

Hot Water Supplying System

HE, LM, LH, MX

Hot Water Supplying System offer a steam fired instantaneous water heater.

By using indirect heating system, there is little variability of hot water supplying temperature. Even if the amount of hot water supply is changed, hot water at the set temperature is stably supplied. We also offer mixing valves that mix steam and water directly for easy use of hot water.

| | | |
|---------------|---------------|---|
| Models | HE | Steam Fired Instantaneous Water Heater Circulation Method |
| | LM, LH | Steam Fired Instantaneous Water Heater One-Way Method |
| | MX1N | Steam - Water Mixing Valve End-Stop System |


- Features**
- Suitable for supply of hot water
 - Easy maintenance
 - Clean and eco-friendly
 - High thermal efficiency

Applications

various industries such as F&B factories, sterilization and cleaning of equipment and kitchens, or cleaning of industrial equipment


Operating principle

● Cold water ■ Hot water ■ Steam

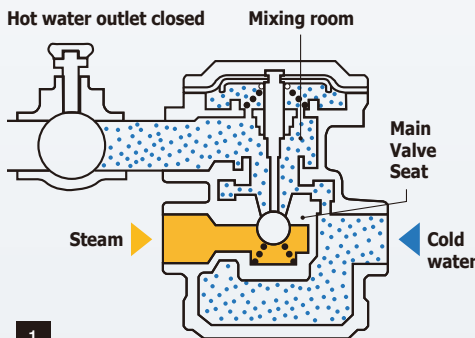


1

The cold water occupies the lower part of the body completely, flows through a hole next to the seat of the main valve into the mixing room and occupies it up to the hot water outlet. The main valve is closed. The steam can't enter the mixing room.

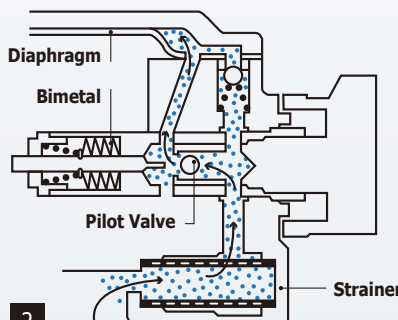


2

When you open the hot water outlet the cold water flows from the mixing room to the hot water outlet. During this process one part of the cold water flows through the strainer and runs behind the pilot valve (which is connected with the bimetal unit) into the space above the diaphragm.

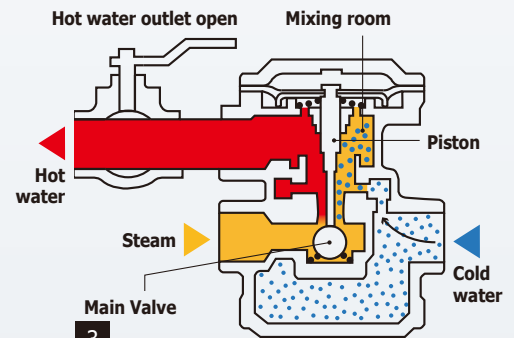


3

The water pressure in the space above the diaphragm increases and pushes the diaphragm and the connected piston downwards. Consequently, the main valve opens and the steam flows into the mixing room and mixes with the cold water. The hot water flows to the hot water outlet.

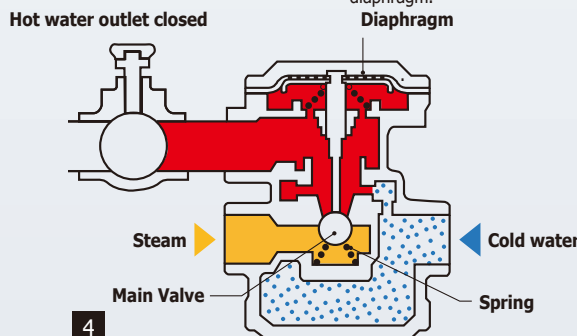

4

When the hot water outlet is being closed the pressure in the mixing room rises, the pressure on the diaphragm increases and the diaphragm returns to its original position. The main valve closes due to the pressure of the spring and the steam.

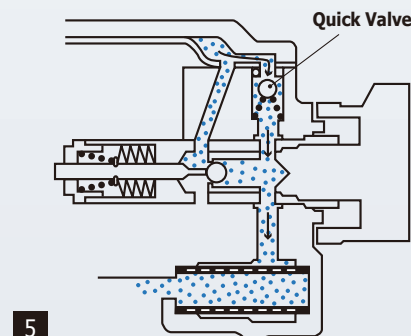


5

The pressure above the diaphragm is equalized by the quick valve. The pilot valve is closed.

HE



Dimensions

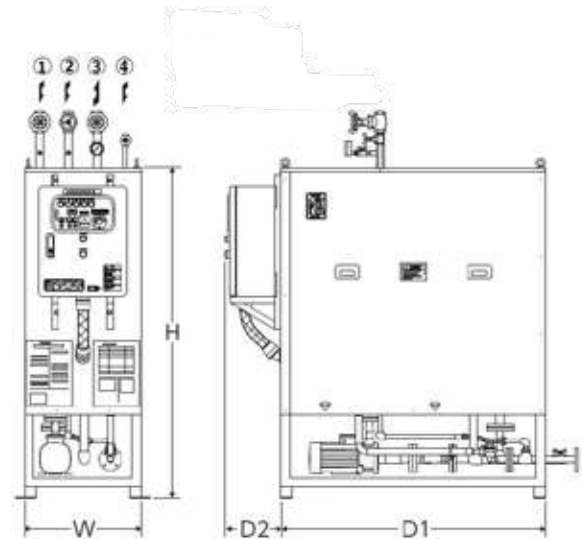

| Model | Dimensions (mm) | | | | Dimensions (in) | | | | Weight | | Weight during operation | |
|-----------|-----------------|------|------|-----|-----------------|------|------|-----|--------|-------|-------------------------|-------|
| | w | H | D1 | D2 | W | H | D1 | D2 | kg | lb | kg | lb |
| HE-04RH-5 | 530 | 1500 | 1200 | 250 | 20.9 | 59.1 | 47.2 | 9.8 | 260 | 573.3 | 370 | 815.9 |
| HE-04RH-6 | | | | | | | | | | | | |


| Model | Connection | Water inlet | Steam inlet | Hot water supply | Return hot water | Hot water removed | Steam condensate | Overflow | Heating method | Hot water supply method |
|-----------|------------|-------------|-------------|------------------|------------------|-------------------|-------------------|----------|--------------------------------------|---------------------------------------|
| HE-04RH-5 | Screwed | 1" | 1" | 1" | 3/8" | 3/4" (Flanged) | 3/4" (Flanged) | 1" | Steam/cold water Indirect heating | Secondary-side stoppering/Circulation |
| HE-04RH-6 | | | | | | | | | | |

| Model | Hot water temperature | | Rated heat output kW (kcal/h) | Power source (V) | Frequency (Hz) | Electrical capacity (kW) | Current rating (A) | Operating pressure range (MPa) | | Operating pressure range (psig) | | Hot water supply pressure | |
|-----------|-----------------------|----------|-------------------------------------|---------------------|-------------------|-----------------------------|-----------------------|-----------------------------------|------------------------------|------------------------------------|------------------------------|-----------------------------|----------------------------|
| | °C | °F | | | | | | Steam | Cold water | Steam | Cold water | MPa | psig |
| HE-04RH-5 | 30 - 95 | 86 - 203 | 187 (160,000) | AC200 (3-phase) | 50 | 1.8 | 7.6 | 0,2 - 0,35 (flow pressure) | 0,1 - 0,4 (flow pressure) | 29 - 50.75 (flow pressure) | 14.5 - 58 (flow pressure) | 0,2 (During max. supply) | 29 (During max. supply) |
| HE-04RH-6 | | | | | 60 | | | | | | | | |

LM15



Dimensions

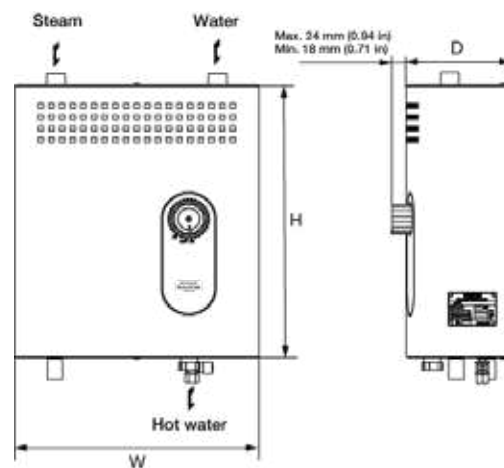

| Steam pressure | | Water supply pressure | | Hot water supply rate(l/min) by water temperature | | | |
|----------------|------|-----------------------|------|---|---------------|---------------|---------------|
| MPa | psig | MPa | psig | 40°C 104°F | 50°C 122°F | 60°C 140°F | 70°C 158°F |
| 0,1 | 14.5 | 0,1 | 14.5 | 16 | 11 | 8 | 7 |
| | | 0,2 | 29 | | | | |
| | | 0,3 | 43.5 | | | | |
| | | 0,4 | 58 | | | | |
| 0,2 | 29 | 0,1 | 14.5 | 18 | 16 | 12 | 10 |
| | | 0,2 | 29 | 23 | | | |
| | | 0,3 | 43.5 | | | | |
| | | 0,4 | 58 | | | | |
| 0,3 | 43.5 | 0,1 | 14.5 | 19 | 22 | 16 | 13 |
| | | 0,2 | 29 | 30 | | | |
| | | 0,3 | 43.5 | | | | |
| | | 0,4 | 58 | | | | |

| Model | Dimensions (mm) | | | Dimensions (in) | | | Weight | |
|---------|-----------------|-----|-----|-----------------|------|-----|--------|------|
| | W | H | D1 | W | H | D1 | (kg) | (lb) |
| LM15-IV | 375 | 408 | 153 | 14.8 | 16.1 | 6.0 | 16,0 | 35.3 |

| Model | Connection | | | | | | | Heating method | Installation method | Hot water supply method |
|---------|------------|-------------|-------------|------------------|----------------------------|---------------------------------|------------------|------------------|---------------------|---|
| | Type | Size | | | | | | | | |
| | | Water inlet | Steam inlet | Hot water supply | Steam condensate discharge | Pressure relief valve discharge | Inspection valve | | | |
| LM15-IV | Screwed Rc | 1/2" | 1/2" | 1/2" | 3/8" | 3/8" | 1/8" | Indirect heating | Wall mounted | One-way hot water supply (circulated water supply not possible) |


| Model | Hot water supply temperature range | | Hot water supply pressure | Steam pressure | | Water supply pressure | | Max. steam use rate | Max. heat exchange volume |
|---------|------------------------------------|-----------|----------------------------------|-------------------------|-----------------------------|----------------------------|----------------------------|---------------------|---------------------------|
| | °C | °F | | MPa | psig | MPa | psig | | |
| LM15-IV | 40 - 70 | 104 - 158 | Depends on water supply pressure | 0,1-0,3 (flow pressure) | 14.5 - 43.5 (flow pressure) | 0,1 - 0,4* (flow pressure) | 14.5 - 58* (flow pressure) | 92 | 54 |

LH15



Dimensions

| Steam pressure | | Water supply pressure | | Hot water supply rate (t/min) by water temperature | | |
|----------------|------|-----------------------|------|--|-------|-------|
| MPa | psig | MPa | psig | 70°C | 80°C | 90°C |
| | | | | 104°F | 122°F | 140°F |
| 0,2 | 29 | 0,1 | 14.5 | 17 | 15 | 12 |
| | | 0,2 | 29 | | | |
| | | 0,3 | 43.5 | | | |
| | | 0,4 | 58 | | | |
| 0,3 | 43.5 | 0,1 | 14.5 | 19 | 17 | 15 |
| | | 0,2 | 29 | 22 | 19 | |
| | | 0,3 | 43.5 | | | |
| | | 0,4 | 58 | | | |
| 0,4 | 58 | 0,1 | 14.5 | 19 | 17 | 16 |
| | | 0,2 | 29 | 27 | 23 | |
| | | 0,3 | 43.5 | | | |
| | | 0,4 | 58 | | | |
| 0,5 | 72.5 | 0,1 | 14.5 | 20 | 18 | 16 |
| | | 0,2 | 29 | 26 | 24 | 20 |
| | | 0,3 | 43.5 | | | |
| | | 0,4 | 58 | | | |

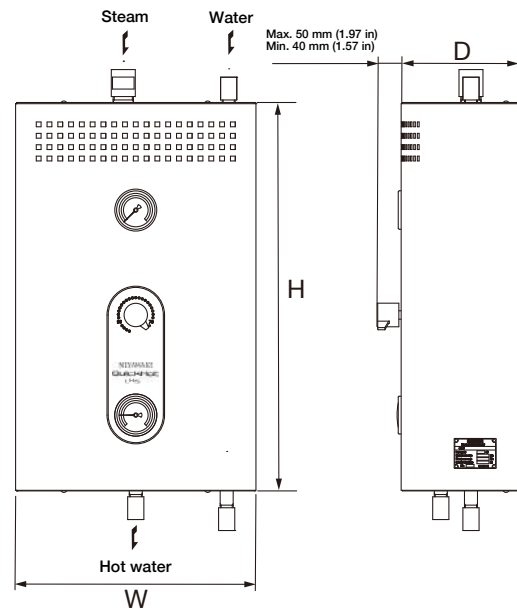

| Model | Dimensions (mm) | | | Dimensions (in) | | | Weight | |
|---------|-----------------|-----|-----|-----------------|------|-----|--------|------|
| | w | H | D1 | W | H | D | kg | lb |
| LH15-II | 401 | 648 | 195 | 15.8 | 25.5 | 7.7 | 30,0 | 66.2 |

| Model | Connection | | | | | Heating method | Installation method | Hot water supply method |
|---------|------------|-------------|-------------|------------------|-----------------------------------|------------------|---------------------|---|
| | Type | Size | | | | | | |
| | | Water inlet | Steam inlet | Hot water outlet | Steam condensate discharge outlet | | | |
| LH15-II | Screwed Rc | 1/2" | 1" | 1/2" | 1/2" | Indirect heating | Wall mounted | One-way hot water supply (circulated water supply not possible) |


| Model | Hot water supply temperature range | | Hot water supply pressure | Steam pressure | | Water supply pressure | | Max. steam use rate | | Max. heat exchange volume |
|---------|------------------------------------|-----------|----------------------------------|-------------------------|---------------------------|----------------------------|----------------------------|---------------------|------|---------------------------|
| | °C | °F | | MPa | psig | MPa | psig | kg/h | lb/h | |
| LM15-II | 70 - 90 | 158 - 194 | Depends on water supply pressure | 0,2-0,5 (flow pressure) | 29 - 72.5 (flow pressure) | 0,1 - 0,4* (flow pressure) | 14.5 - 58* (flow pressure) | 220 | 485 | 118 |

Steam Fired Instantaneous Water Heater | One-Way Method **LMG1**


LMG1



Control box



Flow switch



Control box

| Dimensions (mm) | | | Dimensions (in) | | | Weight | |
|-----------------|----|----|-----------------|-----|-----|--------|-----|
| W | H | D1 | W | H | D1 | kg | lb |
| 125 | 75 | 60 | 4.9 | 3.0 | 2.4 | 0,7 | 1.5 |


Flow switch

| Dimensions (mm) | | Dimensions (in) | | Weight | |
|-----------------|----|-----------------|-----|--------|-----|
| W | D | W | D | kg | lb |
| 185 | 26 | 7.3 | 1.0 | 0,35 | 0.8 |

| Voltage rating | Voltage fluctuation tolerance range | Electromagnetic valve drive voltage | Control input | Control | Environmental operating temperature | Inspection valve | Environmental operating humidity | Flow switch material | Flow switch material |
|-----------------------------|-------------------------------------|--|---------------|---|--|------------------|----------------------------------|----------------------|--------------------------------|
| AC100/200V (50/60Hz) shared | 85 - 110% of voltage rating | As per voltage rating AC100V 1Amax, AC200V 0.5Amax | Flow switch | When control input is ON Electromagnetic valve output ON | -10°C~55°C (must be no frost or condensation) | 14°F~131°F | 45~85%RH | IP65 equivalent | Body: SUS316 Socket: SUS304 |

| Flow switch installing direction | Flow switch connection | | Included cable | |
|---|------------------------------------|---------------------|--|--|
| Unrestricted (Recommended: Vertical downward) | Inlet-side R1/2, outlet side Rc1/2 | | 2m each for power supply, output, and input Flow switch 60cm (23.6in) (with waterproof connector) | 78.74in each for power supply, output, and input Flow switch 23.6in (with waterproof connector) |
| | Face-to-face: 185mm | Face-to-face: 7.3in | | |


Installation Examples **LM, LH**

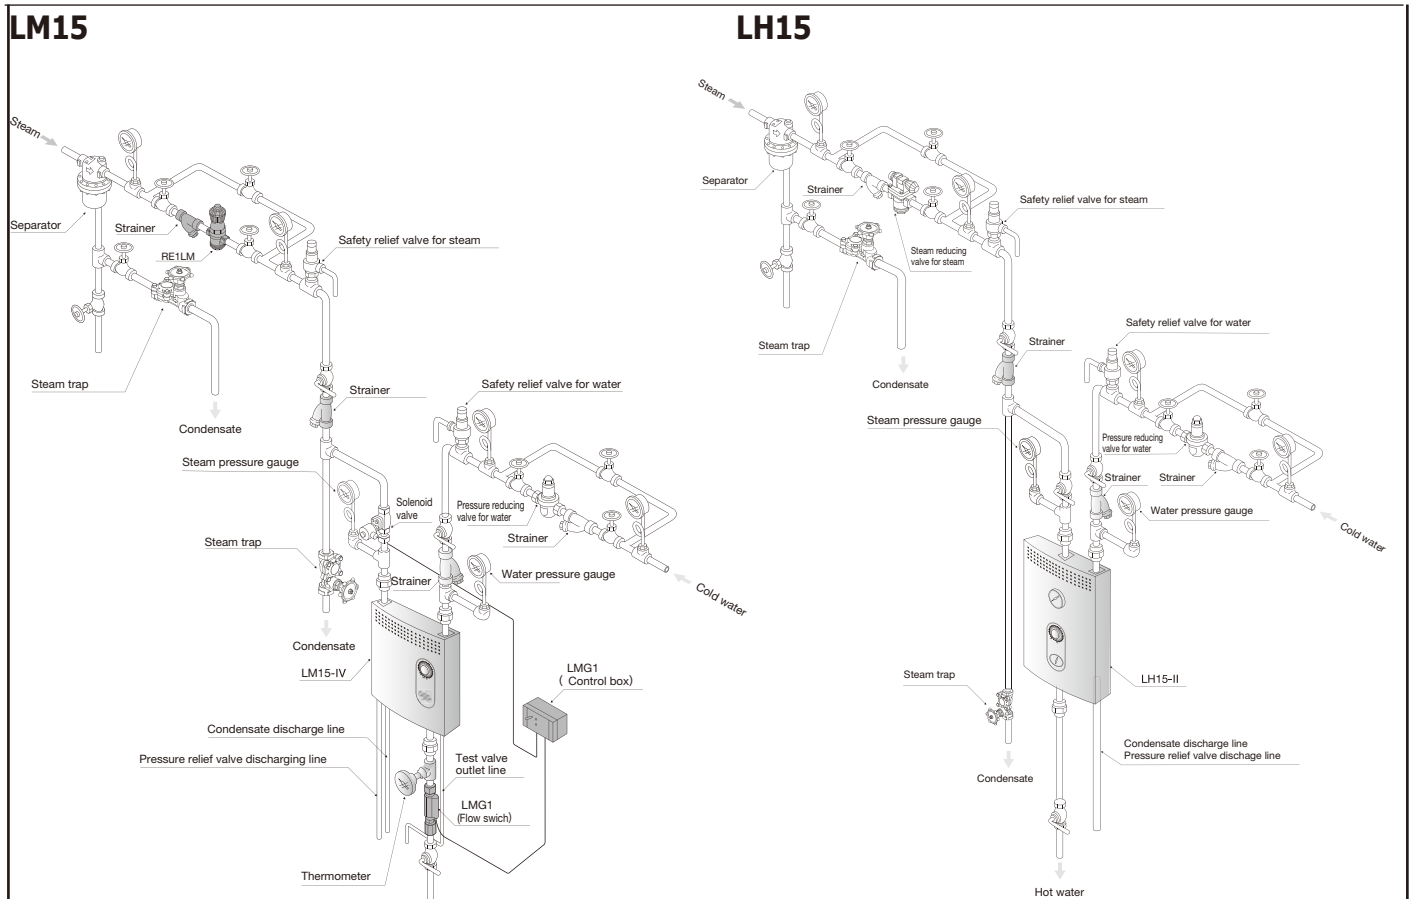


MK



MK-2



MK-82



Features

1. Trigger operated water gun. Front trigger or rear trigger available
2. Perfect water consumption control
3. One-handed mode with either variable spray or direct jet
4. Automatic and immediate shut-off when the trigger is released

Suitable for

- MK2** is suitable for most industrial applications
- MK-MV** is recommended for use with Steam-Water-Mixing Valves

| Model | Material | Rubber Cover | Trigger | Orifice Size | | Max. Pressure | |
|--------------|-----------------------------|----------------|---------|--------------|------|---------------|-------|
| | | | | in | mm | MPa | psi |
| MK-2 | Gunmetal or Stainless Steel | Black or White | rear | 5/16" | 7,9 | 2,7 | 391,6 |
| MK-OH | | | | 7/16" | 11,1 | | |
| MK-MV | | | | 9/16" | 14,3 | | |
| MK-78 | Gunmetal | Black or White | front | 5/16" | 7,9 | 1,05 | 152,2 |
| MK-80 | | | | 7/16" | 11,1 | | |
| MK-82 | | | | 9/16" | 14,3 | | |

The spray pattern can be changed by adjusting the trigger Position. A partial squeeze results in a wide spray which can be narrowed by further squeezing, up to a concentrated Jet.



Spray

| Pressure | | Orifice Size | | | Orifice Size | | |
|----------|------|--------------|-------|-------|--------------|-------|-------|
| MPa | psig | 5/16" | 7/16" | 9/16" | 5/16" | 7/16" | 9/16" |
| | | l/min | | | GPM | | |
| 0,3 | 43.5 | 38.2 | 37.2 | 51 | 10 | 9.8 | 13.4 |

Jet

| Pressure | | Orifice Size | | | Orifice Size | | |
|----------|------|--------------|-------|-------|--------------|-------|-------|
| MPa | psig | 5/16" | 7/16" | 9/16" | 5/16" | 7/16" | 9/16" |
| | | l/min | | | GPM | | |
| 0,3 | 43.5 | 21,5 | 32 | 51 | 5.6 | 8.4 | 13.4 |


MX1N Installation Examples

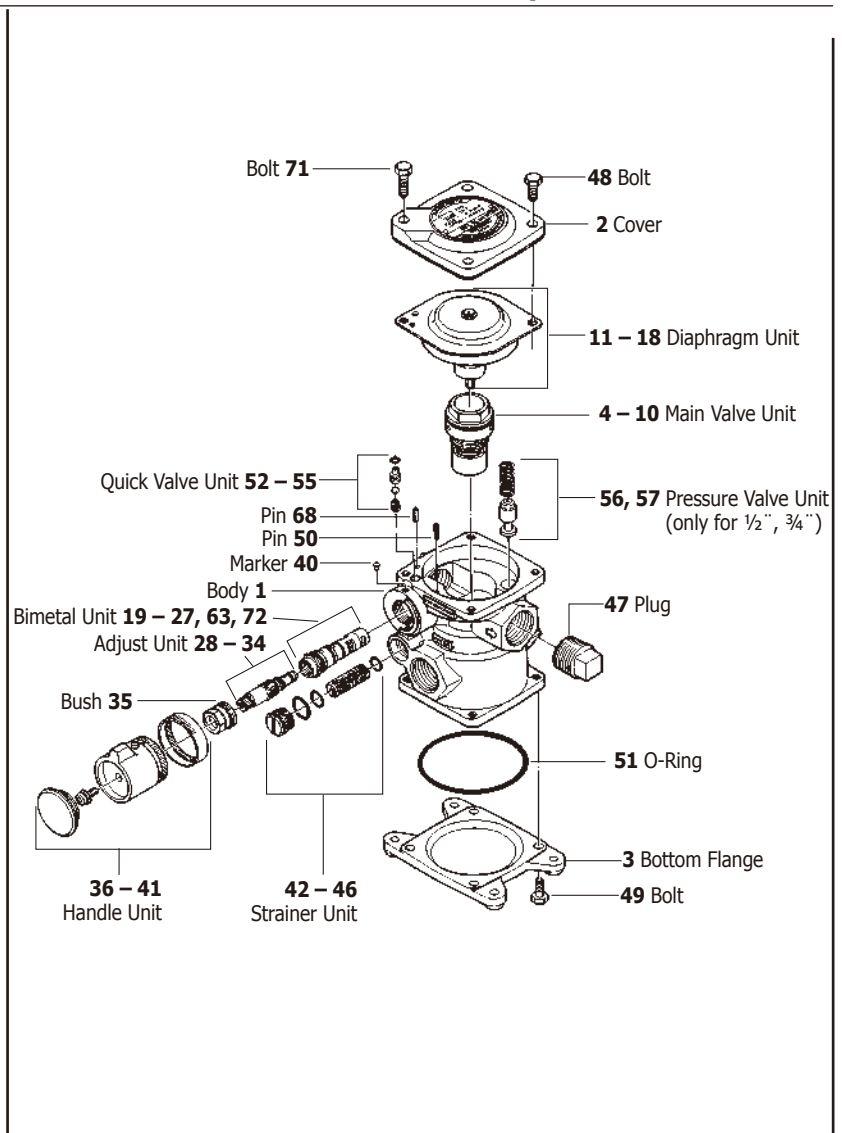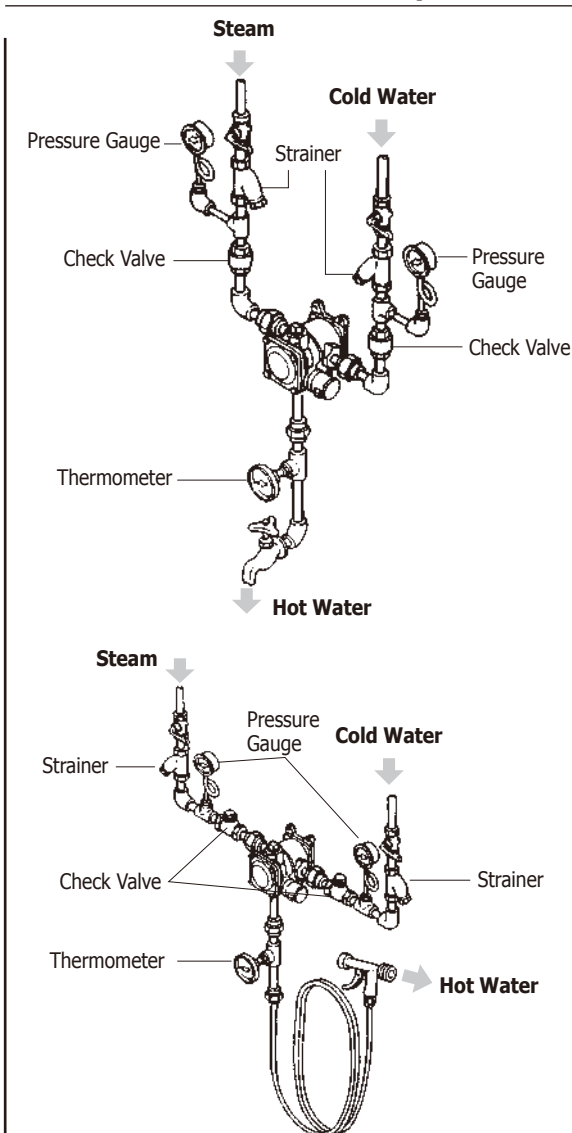


CVC3, CVC3R, CV5R



Pressure Drop Chart

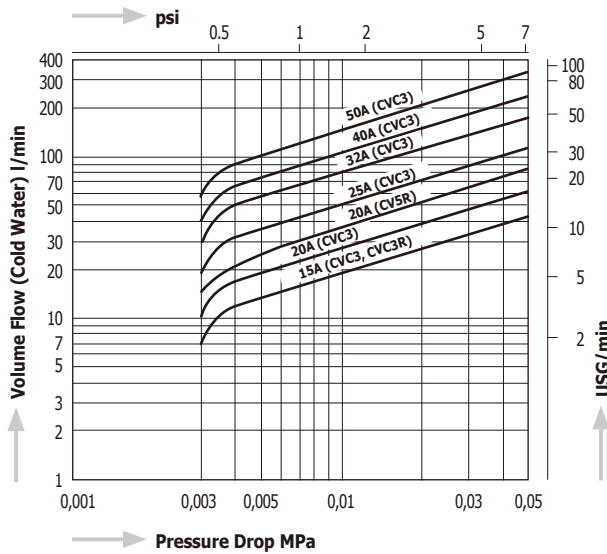


Dimensions

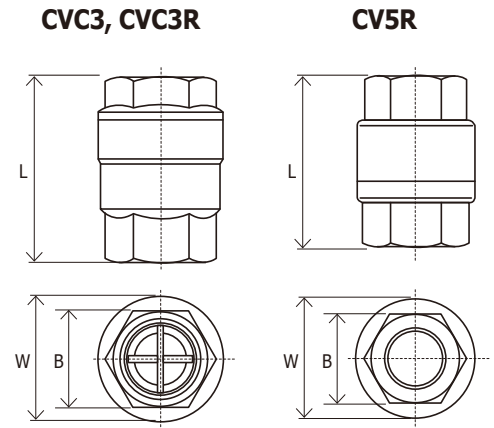


| Model | Connections | Size | Max. Operating Pressure | | Opening Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | Dimensions (in) | | | Body Material | Weight | |
|-------|-----------------|--------|-------------------------|------|------------------|------|----------------------------|-----|-----------------|----|----|-----------------|-----|-----|------------------------|--------|-----|
| | | | MPa | psig | MPa | psig | °C | °F | L | W | B | L | W | B | | kg | lb |
| CVC3 | Screwed Rc, NPT | 1/2" | 2,1 | 305 | 0,003 | 0,44 | 220 | 428 | 48 | 35 | 27 | 1.9 | 1.4 | 1.1 | Stainless Steel SCS13A | 0,2 | 0,4 |
| | | 3/4" | | | | | | | 61 | 43 | 33 | 2.4 | 1.7 | 1.3 | | 0,3 | 0,7 |
| | | 1" | | | | | | | 73 | 54 | 41 | 2.9 | 2.1 | 1.6 | | 0,6 | 1,3 |
| | | 1 1/4" | | | | | | | 80,5 | 62 | 50 | 3.2 | 2.4 | 2.0 | | 0,8 | 1,8 |
| | | 1 1/2" | | | | | | | 87 | 75 | 58 | 3.4 | 3.0 | 2.3 | | 1,2 | 2,6 |
| | | 2" | | | | | | | 100 | 90 | 72 | 3.9 | 3.5 | 2.8 | | 1,8 | 4,0 |
| CVC3R | Screwed Rc, NPT | 1/2" | 2,1 | 305 | 0,003 | 0,44 | 80 | 176 | 48 | 35 | 27 | 1.9 | 1.4 | 1.1 | SCS13A | 0,2 | 0,4 |
| CV5R | Screwed Rc, NPT | 3/4" | 1,6 | 230 | 0,003 | 0,44 | 80 | 176 | 60 | 46 | 34 | 2.4 | 1.8 | 1.3 | SCS13A | 0,29 | 0,6 |

VB1, VB1R Blow-down Valve


VB1, VB1R

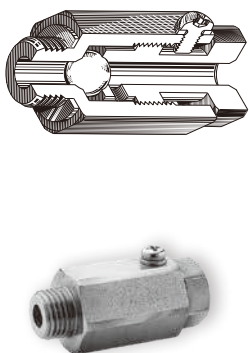

Capacity Chart

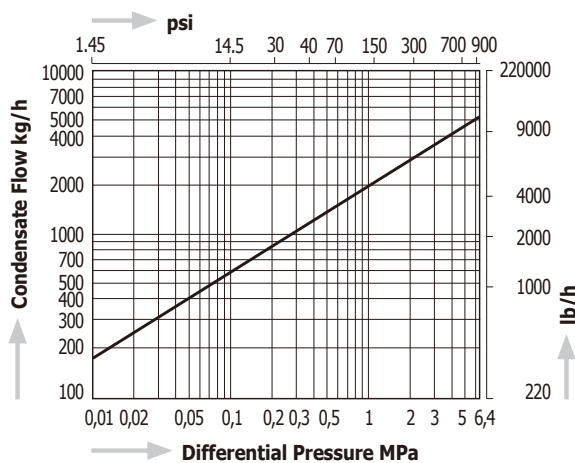

Dimensions

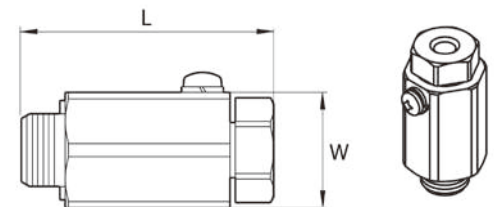


| Model | Connection | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|-------|------------|------|-------------------------|------|----------------------------|-----|-----------------|----|----|-----|-----------------|----|----|-----|------------------------|--------|------|
| | | | MPa | psig | °C | °F | L | H1 | H2 | W | L | H1 | H2 | W | | kg | lb |
| VB1 | Screwed G | 1/4" | 6,4 | 928 | 425 | 800 | 46 | | | 25 | 1.8 | | | 1.0 | Stainless Steel SUS304 | 0,08 | 0,18 |
| VB1R | Screwed R | | | | | | 50 | | | 2.0 | | | | | | | |


Y




Dimensions YM1



YSF-F



YSF-W



| Model | Connections | Size | Max. Operating Pressure | | Max. Operating Temperature | | Mesh | Dimensions (mm) | | | Dimensions (in) | | | Body Material | Weight | | | | |
|-------|----------------------------|-------------|-------------------------|------|----------------------------|-----|------|-----------------|-----|----|-----------------|-----|-----|--------------------------|--------|------|--|-------------------|------|
| | | | MPa | psig | °C | °F | | L | H | W | L | H | W | | kg | lb | | | |
| YM1 | Screwed Rc, NPT | 1/2" | 2,0 | 290 | 220 | 428 | 60 | 75 | 55 | | 3.0 | 2.2 | | Ductile Cast Iron FCD450 | 0,5 | 1.1 | | | |
| | | 3/4" | | | | | | 90 | 70 | | 3.5 | 2.8 | | | 0,9 | 2.0 | | | |
| | | 1" | | | | | | 110 | 85 | | 4.3 | 3.3 | | | 1,4 | 3.1 | | | |
| YSF-F | Flanged JIS, ASME, DIN | 1/2" | 4,9 | 710 | 425 | 800 | 60 | 230 | 125 | 82 | 9.1 | 4.9 | 3.2 | Forged Steel A105 | 7,0 | 15.4 | | | |
| | | 3/4" - 1" | | | | | | | | | | | | | 8,0 | 17.6 | | | |
| | | 1 1/4" | | | | | | | | | | | | | | | | Forged Steel S25C | 16,0 |
| YSF-W | Socket Weld JIS, ASME, DIN | 1/2" - 1" | 4,9 | 710 | 425 | 800 | 60 | 140 | 125 | 82 | 5.5 | 4.9 | 3.2 | Forged Steel A105 | 5,0 | 11.0 | | | |
| | | 1 1/4" - 2" | | | | | | | | | | | | | | | | Forged Steel S25C | 9,5 |
| | | | | | | | | | | | | | | | | | | | |


Screwed (NPT) connection is available as special design.
For more details, please contact MIYAWAKI Inc, or an authorized representative.

Vacuum Breaker CV11, CVU15


CV11, CVU15



Capacity Chart CV11




Capacity Chart CVU15



Dimensions CV11



CVU15

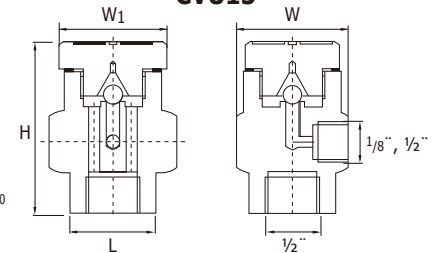

| Model | Connections | | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | | Dimensions (in) | | | | | Body Material | Weight | | | |
|-------|--------------------------------|--------------------------------------|-------------|-------------------------|------|----------------------------|-----|-----------------|----|----|----|----|-----------------|------|------|------|----|---------------------------------------|------------------------|-----|-----|-----|
| | | | | MPa | psig | °C | °F | L | H | W | W1 | W2 | L | H | W | W1 | W2 | | kg | lb | | |
| CV11 | Male thread R | | 1/2" | 0,9 | 130 | 150 | 302 | 130 | | | | | | 5.1 | | | | | Stainless Steel SUS304 | 0,8 | 1.8 | |
| | | | 3/4" | | | | | 135 | | | | | | 5.3 | | | | | | | | |
| | | | 1" | | | | | 135 | | | | | | 5.3 | | | | | | | | |
| CVU15 | System connection | Air inlet connection | 1/2" x 1/8" | 2,1 | 305 | 450 | 842 | 32 | 55 | 41 | 36 | | | 2.17 | 1.61 | 1.42 | | Stainless Steel AISI 304 (DIN 1.4301) | 0,4 | 1.0 | | |
| | 1/2" Screwed (BSPP, BSPT, NPT) | 1/8", 1/2" Screwed (BSPP, BSPT, NPT) | 1/2" x 1/2" | | | | | 70 | | | | | 2.75 | | | | | | | | | 0,6 |

Anti-Freezing Valve F1

F1


Features

1. Easy installation: compact in size
2. No adjustment
3. Easy maintenance


Suitable for

Discharge of remaining condensate out of steam traps and pipe lines


Capacity Chart F1

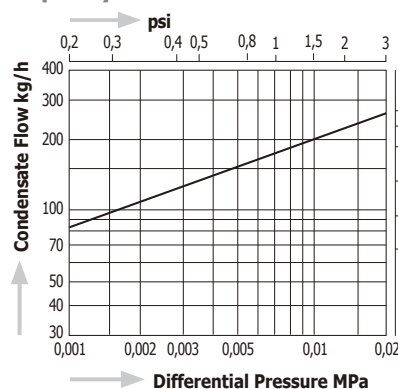

Dimensions F1B

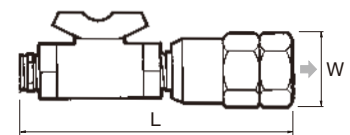

F1



| Model | Connection | Size | Max. Operating Pressure | | Working Pressure | | | | Max. Operating Temperature | | Dimensions (mm) | | Dimensions (in) | | Body Material | Weight | |
|-------|------------------------------------|------------|-------------------------|------|------------------|-----------|-------------|-----------|----------------------------|-----|-----------------|----|-----------------|-----|---------------|--------|-----|
| | | | MPa | psig | Opening | Closing | °C | °F | L | W | L | W | kg | lb | | | |
| F1B | Screwed Rc, NPT | 1/4" | 0,98 | 142 | 0,01 - 0,04 | 1.5 - 5.8 | 0,02 - 0,05 | 2.9 - 7.3 | 220 | 428 | 113 | 27 | 4.4 | 1.1 | Brass C3604 | 0,2 | 0.4 |
| | | 3/8" | | | | | | | | | 119 | | 4.7 | | | 0,2 | 0.5 |
| F1 | Screwed Inlet : R Outlet : Rc, NPT | 1/4", 3/8" | 1,6 | 230 | | | | | | | 52 | | 2.0 | | | 0,1 | 0.3 |

T3



Features


To check operation of steam traps

Suitable for


Steam and liquid lines

Dimensions

T3

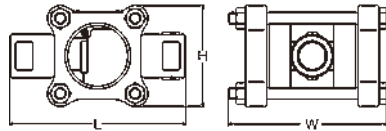


T3F

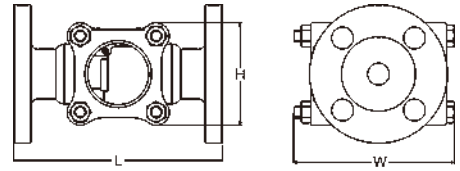


| Model | Connect. | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | | Dimensions (in) | | | | | Body Material | Weight | |
|-------|------------------------|----------|-------------------------|-----|----------------------------|-----|-----------------|----|----|----|-----|-----------------|-----|----|----|-----|--------------------|--------|------|
| | | | MPa | psi | °C | °F | L | H | H1 | H2 | W | L | H | H1 | H2 | W | | kg | lb |
| T3 | Screwed Rc, NPT | 1/2" | 1,0 | 145 | 183 | 361 | 123 | 70 | | | 115 | 4.8 | 2.8 | | | 4.5 | Cast Steel A216WCB | 1,6 | 3.5 |
| | | 3/4", 1" | | | | | | | | | | | | | | | | 1,7 | 3.7 |
| | | 1 1/4" | | | | | | | | | | | | | | | | 3,3 | 7.3 |
| | | 1 1/2" | | | | | | | | | | | | | | | | 3,2 | 7.1 |
| | | 2" | | | | | | | | | | | | | | | | 7,3 | 16.1 |
| T3F | Flanged JIS, ASME, DIN | 1/2" | 1,0 | 145 | 183 | 361 | 144 | 70 | | | 115 | 5.7 | 2.8 | | | 4.5 | Cast Steel A216WCB | 3,3 | 7.3 |
| | | 3/4" | | | | | | | | | | | | | | | | 4,4 | 9.7 |
| | | 1" | | | | | | | | | | | | | | | | 5,0 | 11.0 |
| | | 1 1/4" | | | | | | | | | | | | | | | | 8,0 | 17.6 |
| | | 1 1/2" | | | | | | | | | | | | | | | | 9,0 | 19.8 |
| | | 2" | | | | | | | | | | | | | | | | 12,0 | 26.4 |

Spare Parts

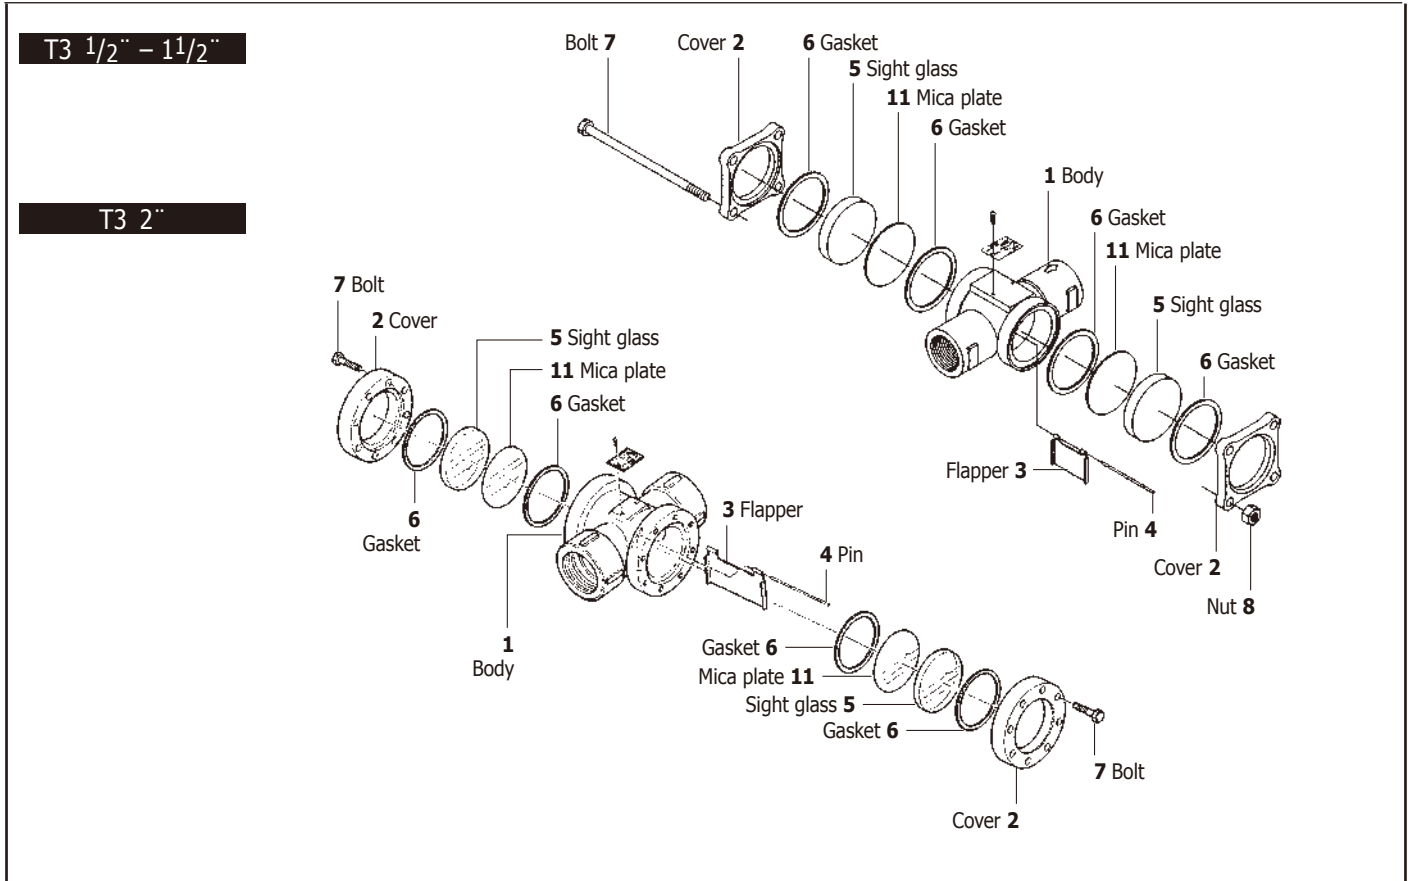


H3

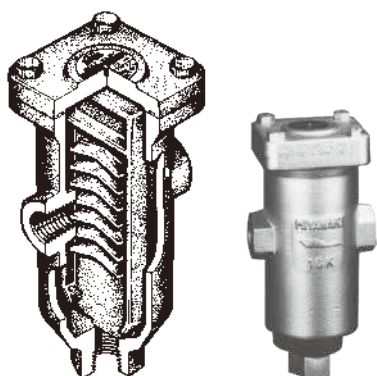

H5



H9XF

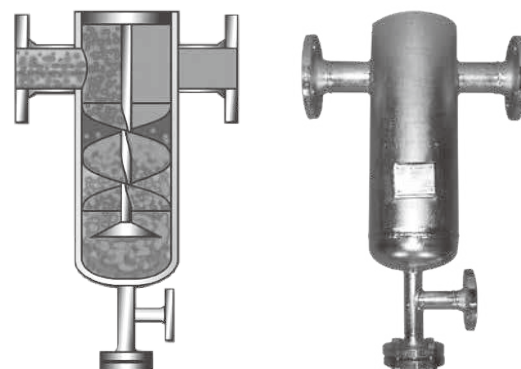

Features


1. Separates mist and condensate from steam and air lines
2. Compact size – easy installation together with Pressure Reducing Valves and Steam Traps
3. Very low pressure loss (0,002 MPa)

Suitable for


All steam and air lines

Dimensions


H3



H5

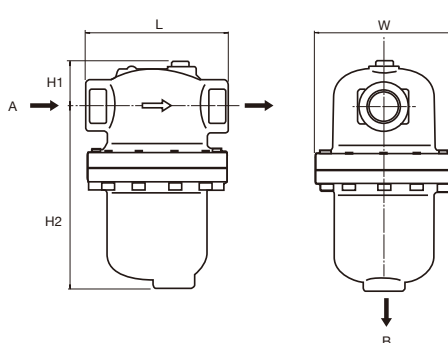

H9XF



| Model | Connections | Size (in) | | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | | |
|-------|-----------------|-----------|------|-------------------------|------|----------------------------|-----|-----------------|----------------|----------------|-----|-----------------|----------------|----------------|-----|--------------------------|--------|------|--|
| | | A | B | MPa | psig | °C | °F | L | H ₁ | H ₂ | W | L | H ₁ | H ₂ | W | | kg | lb | |
| H3 | Screwed Rc, NPT | 1/2" | 1/2" | 1,6 | 230 | 220 | 428 | 100 | 93 | 120 | 86 | 3.9 | 3.7 | 4.7 | 3.4 | Ductile Cast Iron FCD450 | 3,6 | 7.9 | |
| | | 3/4" | 1/2" | | | | | 130 | 120 | 158 | 108 | 5.1 | 4.7 | 6.2 | 4.3 | | 6,7 | 14.7 | |
| | | 1" | 1/2" | | | | | 160 | 130 | 180 | 128 | 6.3 | 5.1 | 7.1 | 5.0 | | 9,4 | 20.7 | |
| H5 | Screwed Rc, NPT | 1/2" | 3/4" | 2,0 | 290 | 220 | 428 | 150 | 50 | 193 | 146 | 5.9 | 2.0 | 7.6 | 5.7 | Ductile Cast Iron FCD450 | 7,1 | 15.6 | |
| | | 3/4" | | | | | | 190 | 69 | 213 | 175 | 7.5 | 2.7 | 8.4 | 6.9 | | 12,5 | 27.6 | |
| | | 1" | | | | | | 219 | 82 | 260 | 199 | 8.6 | 3.2 | 10.2 | 7.8 | | 20,5 | 45.2 | |
| | | 1 1/4" | 1" | | | | | | | | | | | | | | | | |
| | | 1 1/2" | | | | | | | | | | | | | | | | | |
| 2" | | | | | | | | | | | | | | | | | | | |

Flanged connections for H3 and H5 are available as special design. For more details, please contact MIYAWAKI Inc. or an authorized representative.


| Model | Connection | Size (DN) | PN | Inlet | | Outlet | Condensate Outlet | Dirt Pocket | Dimensions (mm) | | | | | | Dimensions (in) | | | | | | Body Material | Weight | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------|-------------------|-----------|----|---------------------|---------------------|--------|-------------------|-------------|---------------------|---------------------|-----|----------------|----------------|----------------|-----------------|----------------|-----|----------------|----------------|----------------|---------------|--------|----------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-----|-----|-----|------|-----|-----|------|------|------|-----|-------|-------|
| | | | | K ₁ (DN) | K ₂ (DN) | | | | K ₃ (DN) | K ₄ (DN) | Dz | H ₁ | H ₂ | H ₃ | S | S ₁ | Dz | H ₁ | H ₂ | H ₃ | | S | S ₁ | kg | lb | | | | | | | | | | | | | | | | | | | | | | | | | |
| H9XF | Flanged DIN, ASME | 15 | 16 | 15 | 15 | 15 | 15 | 15 | 88,9 | 360 | 240 | 50 | 240 | 90 | 3.5 | 14.2 | 9.4 | 2.0 | 9.4 | 3.5 | Steel P265 GH | 6,8 | 15.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 20 | | 20 | 20 | | | | | | | | | | | | | | | | | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 7,3 | 16.1 | | | | | | | | | | | | |
| | | 25 | | 25 | 25 | | | | | | | | | | | | | | | | | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 25 | 7,8 | 17.2 | | | | | | | | |
| | | 32 | | 32 | 32 | | | | | | | | | | | | | | | | | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 12 | 26.4 | | | | | |
| | | 40 | | 40 | 40 | | | | | | | | | | | | | | | | | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 40 | 12,5 | 27.5 | | | |
| | | 50 | | 50 | 50 | | | | | | | | | | | | | | | | | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 50 | 26 | 57.2 | | | |
| | | 65 | | 65 | 65 | | | | | | | | | | | | | | | | | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 65 | 27 | 59.4 | |
| | | 80 | | 80 | 80 | | | | | | | | | | | | | | | | | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 80 | 29 | 63.8 | |
| | | 100 | | 100 | 100 | | | | | | | | | | | | | | | | | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 61 | 134.2 | |
| | | 125 | | 125 | 125 | | | | | | | | | | | | | | | | | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 125 | 65 | 143.0 |
| | | 150 | | 150 | 150 | | | | | | | | | | | | | | | | | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 95 | 209.0 |
| | | 200 | | 200 | 200 | | | | | | | | | | | | | | | | | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 |

Other pressure ratings (PN25, PN40), connections and body materials on request.

UNC Universal Connector for steam trap with two-bolt connection




Screwed




with Blow-down Valve

Dimensions

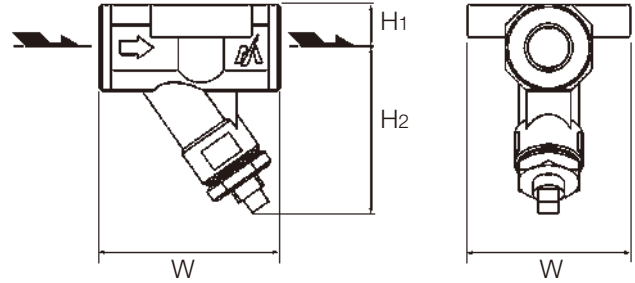


| Model | Connection | Size | Max. Operating Pressure | | Max. Operating Temperature | | Dimensions (mm) | | | | Dimensions (in) | | | | Body Material | Weight | |
|--------------|-----------------|------|-------------------------|------|----------------------------|-----|-----------------|----------------|----------------|----|-----------------|----------------|----------------|-----|--------------------------|--------|-----|
| | | | MPa | psig | °C | °F | L | H ₁ | H ₂ | W | L | H ₁ | H ₂ | W | | kg | lb |
| UNC | Screwed Rc, NPT | 1/2" | 3,2 | 464 | 400 | 752 | 80 | 19 | 73 | 72 | 3.2 | 0.8 | 2.9 | 2.8 | Stainless Steel A351CF8M | 1,0 | 2.2 |
| UNC-W | Socket Weld | 3/4" | | | | | | | | | | | | | | | |

Installation Example

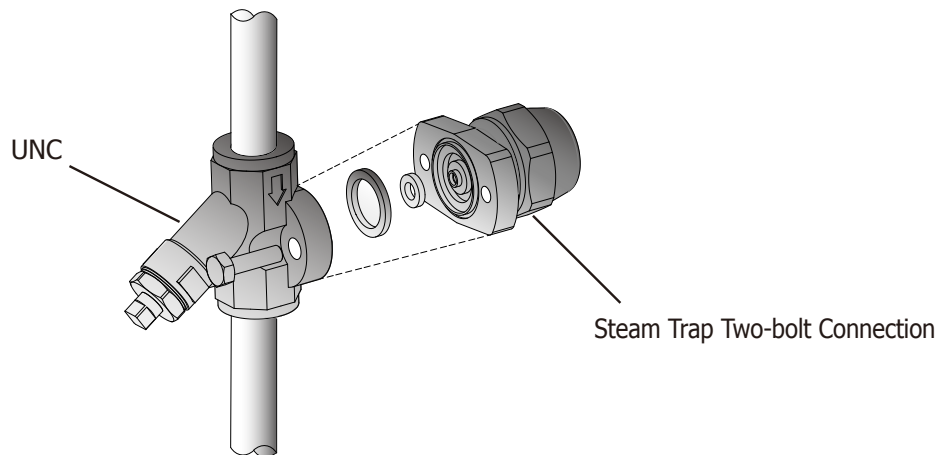

CTC-P

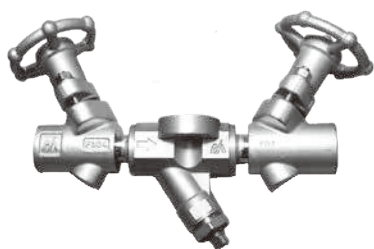

Features


- Quick maintenance and replacement of steam traps with two-bolts connector
- Easy installation
- Built-in screen for safer scale removal
- Multifunctions
- Horizontal/Vertical installation

Suitable for


Condensate Manifold Package, Steam Traps with two-bolts connection

Dimensions

PVU1



CTC-P1

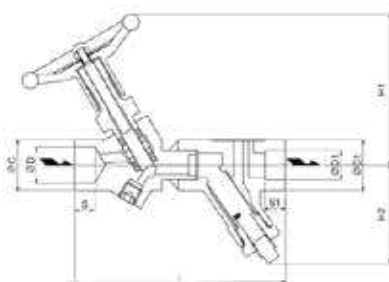

CTC-P2

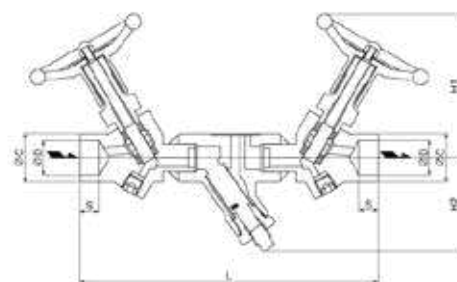


Table1:Dimensions

| Model | Size | Dimensions(mm) | | | | | | | | Dimensions (in) | | | | | | | | Weight | |
|-------|---------|----------------|------|----|-------|------|----|----------------|----------------|-----------------|-----|-----|-----|-----|-----|----------------|----------------|--------|-----|
| | | C | D | S | D1 | t | L | H ₁ | H ₂ | C | D | S | D1 | t | L | H ₁ | H ₂ | kg | lb |
| PVU1 | 3/4×1/2 | 38 | 27,2 | 15 | 21,34 | 2,77 | 90 | 112 | 32 | 1.5 | 1.1 | 0.6 | 0.8 | 0.1 | 3.5 | 4.4 | 1.3 | 1,3 | 2.9 |

| Model | Size | Dimensions(mm) | | | | | | | | | Dimensions (in) | | | | | | Weight | | | |
|--------|---------|----------------|------|----|----|------|----|-----|----------------|----------------|-----------------|-----|-----|-----|-----|-----|----------------|----------------|-----|-----|
| | | C | D | S | C1 | D1 | S1 | L | H ₁ | H ₂ | C | D | S | C1 | D1 | S1 | H ₁ | H ₂ | kg | lb |
| CTC-P1 | 3/4×1/2 | 38 | 27,2 | 15 | 36 | 2,77 | 90 | 157 | 112 | 73 | 1.5 | 1.1 | 0.6 | 1.4 | 0.9 | 0.6 | 4.4 | 2.9 | 2,3 | 5.1 |

| Model | Size | Dimensions(mm) | | | | | | Dimensions (in) | | | | | | | | Weight | |
|--------|------|----------------|------|----|-----|----------------|----------------|-----------------|-----|-----|-----|-----|-----|----------------|----------------|--------|-----|
| | | C | D | S | L | H ₁ | H ₂ | C | D | S | D1 | t | L | H ₁ | H ₂ | kg | lb |
| CTC-P2 | 3/4 | 38 | 27,2 | 15 | 234 | 112 | 73 | 1.5 | 1.1 | 0.6 | 9.2 | 4.4 | 9.2 | 4.4 | 2.9 | 3.6 | 7.9 |

| Piston Valve | Universal Connector (UNC) Body Material | Max.Allowable Pressure | | Max.Allowable Temperature | | Max.Operating Pressure | | Max.Operating Temperature | | Size | Connection | Valve Types | No. of Valves | PVU1 Seat Leakage Test | Screen |
|-----------------------|--|------------------------|------|---------------------------|-----|------------------------|------|---------------------------|-----|------|---------------------|--------------|----------------------------------|---------------------------------------|-------------------------|
| | | MPa | psig | °C | °F | MPa | psig | C | D | | | | | | |
| A182 F304 / ASTM A105 | CF8M / WCB | 3,2 | 464 | 400 | 752 | 3,2 | 464 | 400 | 752 | 3/4 | SW (ASME Class3000) | Piston Valve | Primary side 1, Secondary Side 1 | API598 (Valve Inspection and Testing) | 20 Mesh eqv. (Built-in) |

Steam Trap Survey Assistant

Dr. Trap® Jr.

PM15

It is the ideal partner for steam trap inspections.

PM15 is capable to work with most of the steam traps of the main manufacturers.



Ultrasonic Checker PM11



Temperature Probe



SurveyPro Light PM150 V2.0

Features PM15

The Steam Trap Ultrasonic Checker PM11 has been designed to assess the operating condition of steam traps during operation by measuring the vibration and the temperature of the surface.

- The system consists of the Ultrasonic Checker PM11, a Temperature Probe and the SurveyPro Light PM 150 Software version 2.0.
- Measures vibration and temperature at the same time
- The temperature probe can measure temperatures between 0°C and 250°C
- Estimates and displays the saturation pressure by measuring the temperature.
- Useful for testing not only steam traps, but also valves
- One key operation for all functions
- Long battery life – 40 hours or more of continuous use
- Shuts off automatically if the device is not in use for 5 minutes
- Includes a stop watch for monitoring periodic characteristics of vibrations
- Compact, lightweight and easy to carry

Software SurveyPro Light PM150 V2.0

Software for analyzing the data which had been measured by using the steam trap checker PM11 and for determining the condition of the steam trap.

- Standard and Special versions available
- Both versions allow the estimation of CO₂ emissions which correspond to leaking steam traps.
- Compatible with Windows 10 – 32 and 64 bit versions. Please contact MIYAWAKI Inc. about Windows 11.
- Full data compatibility. Data generated by the previous version can be integrated into the new software*
- The version 2.0 comes with an updated list of steam trap models of the main steam trap manufacturers.
- The updated software allows a better classification of steam traps to various groups and areas inside a plant with the possibility for more detailed analysis of selected groups or areas.

* For more details please contact MIYAWAKI Inc. or an authorized representative

Working Flow

| | | |
|--|--|---|
| <p>1 Tagging of Steam Traps</p> <p>Put a tag on or text to each trap in your factory, so that it can be easily identified any time.</p> | <p>2 Survey List set-up</p> <p>Run the Survey Pro Light software and fill in the basic information of the steam traps. Information such as survey list name, tag number, area, manufacturer, inlet pressure or size are filled in at this moment.</p> | <p>3 Traps inspection</p> <p>Diagnose each trap on site using the checker PM11. Write down the vibration data measured for each trap.</p> |
| <p>4 Filling out of Survey List</p> <p>Run again the Survey Pro Light software and enter the measured vibration data into the survey list for each trap. Once the vibration value of a trap has been entered, the operating condition of the trap will be displayed immediately. The list will also display the steam loss of each trap (if detected) and the related financial losses.</p> | <p>5 Analysis</p> <p>After entering all test results of the survey, the software can show an analysis for each trap type and manufacturer, an analysis of steam losses and related financial losses for each manufacturer and trap type, an analysis of CO₂ emission, or an analysis for kind of application (process, tracing, etc.), with the possibility of showing the results by areas or groups.</p> | <p>6 Trend Analysis</p> <p>Comparisons can be made by Manufacturer, by the installed types, by the pressure classification and by applications. In each case:</p> <ul style="list-style-type: none"> - the failure rate - the steam loss - and money loss tendencies will be shown. |

Technical Specification

| | | | |
|--|--|---|---|
| <p>Probes</p> <p>Vibration</p> | <p>Piezo-electric-ceramic acceleration sensor (10 kHz – 40 kHz)</p> | <p>Displays</p> | <p>Illuminated liquid crystal display (LCD)</p> |
| <p>Temperature</p> | <p>Thermistor Range: 0 – 250°C / 32 – 482°F</p> | <p>Housing</p> | <p>Heat-resistant plastic (ABS), simple waterproof design</p> |
| <p>Weight</p> | <p>230 g (incl. batteries)</p> | <p>Ambient working temperature</p> | <p>0 – 40°C (32 – 104°F)</p> |
| <p>Power supply</p> | <p>2 x 1.5V AA alkaline batteries (80 hours or more (45 hours or more with the LCD light on continuously.)) 2 x 1.2V AA NiMH (75 hours or more (40 hours or more with the LCD light on continuously.))</p> | | |

Steam Trap Survey Assistant

Dr. Trap® Jr.


SurveyPro Light PM150 V2.0

Main Functions – Standard Version


Survey List

| Survey List Name | Group | Area | Trap No. | Event Name | Survey/Service Date | Inlet | Location | Type |
|------------------|-------|------|----------|---------------------|---------------------|-------|----------|------|
| 1st Section | | | 10 | 2011 Routine Survey | 6/1/2011 | Trap | | Trap |
| 1st Section | | | 20 | 2011 Routine Survey | 6/1/2011 | Trap | | Trap |
| 1st Section | | | 30 | 2011 Routine Survey | 6/1/2011 | Trap | | Trap |
| 1st Section | | | 40 | 2011 Routine Survey | 6/1/2011 | Trap | | Trap |
| 1st Section | | | 50 | 2011 Routine Survey | 6/1/2011 | Trap | | Trap |
| 1st Section | | | 60 | 2011 Routine Survey | 6/1/2011 | Trap | | Trap |
| 1st Section | | | 70 | 2011 Routine Survey | 6/1/2011 | Trap | | Trap |
| 1st Section | | | 80 | 2011 Routine Survey | 6/1/2011 | Trap | | Trap |
| 1st Section | | | 90 | 2011 Routine Survey | 6/1/2011 | Trap | | Trap |
| 1st Section | | | 100 | 2011 Routine Survey | 6/1/2011 | Trap | | Trap |

Analysis

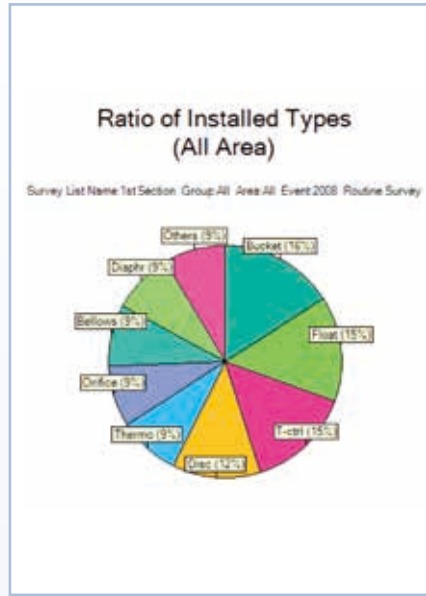

Trend Analysis

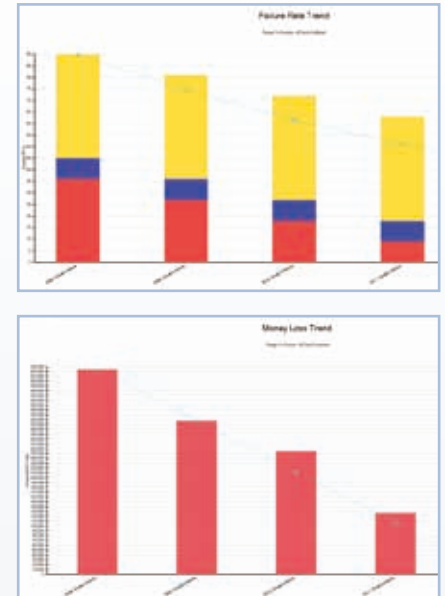


Additional Functions – Special Version

The Special Version includes the functions of the Standard Version plus the following ones:

Integration of multiple survey files into a single one

Repair Cost Management

Repair Efficiency

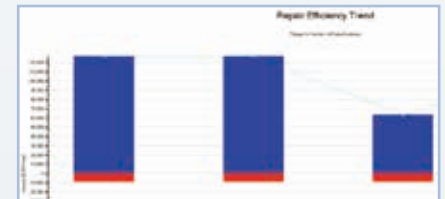


Management of other kind of failures

- Failure of inlet valve
- Failure of outlet valve
- Failure of other than valves

User and Ranking Summaries

Service Period

Average Consumption Cost

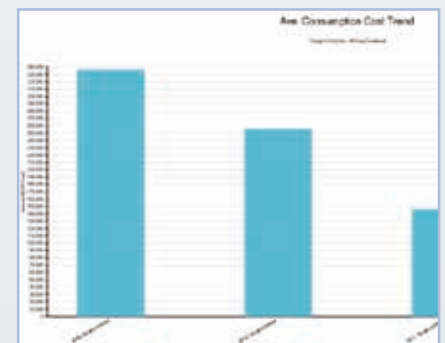

Steam Trap Management System

Dr. Trap®

PM500

Steam Trap Management System PM500

Checker (PM520)

It detects the vibration and temperature in steam traps at the same time.

The survey accuracy has been improved from the previous model (PM321) by MIYAWAKI's sensor technology.



Checker (PM520)



Trap Survey App (PM510)

* Tablet to be prepared by customer
* For Windows® only

Trap Survey App (PM510)

The App will be installed on a tablet computer, which must be prepared by the customer.

It displays and stores survey results transferred from the checker using Bluetooth connection.

Software SurveyPro 4.0 (PM530)

The software will be installed on a personal computer. It aggregates and analyzes steam trap data from the Trap Survey App, identifying faulty steam traps, providing steam loss and financial loss data and includes many other possibilities to manage the steam traps easily.

It provides detailed charts and graphs.



* Standard and Special versions available

Software SurveyPro 4.0 (PM530)

Features of PM500

- **High-speed survey**

The special design of the vibration sensor integrating a contact-type thermocouple sensor guarantees a high survey speed. Each steam trap will be surveyed within 2 seconds at the shortest, and 10 seconds at the maximum.

- **Improved survey accuracy**

The holding mechanism of the probe tip ensures a pressing force, which reduces the discrepancy of survey results substantially.

- **Simple operation**

The checker is ergonomic shaped to handle and operate with one hand. The survey will start automatically by simply pressing down the probe on the trap with minimum force. It is possible to proceed with the survey uninterruptedly without using the tablet.

- **Improved durability**

Dust and water protection : IP34 (Conforming to IEC 60529)
Drop test (Conforming to IEC 60068-2-31)

- **Estimation of CO₂ emissions**

The software can estimate CO₂ emissions based on steam trap leakage amounts.

- **Full data compatibility**

After converting survey data generated by the previous version (V3.1), the data can be integrated into the new software without any problems.

Technical Specifications

| Hardware | Weight | | Sensor | | Ambient working temperature | | Max. surface temperature | | Power supply *not included in package | Continuous operating (approximately) Hours | Working survey time Seconds | Bluetooth | |
|----------------------|---------------|------|------------------------------|---------------------|-----------------------------|-----------|--------------------------|-----|--|---|--------------------------------|--------------------|------------------------|
| | g | lb | Vibration | Temperature | °C | °F | °C | °F | | | | Interface | Communication distance |
| Checker PM520 | 220 | 0.49 | Piezo-electro-ceramic sensor | Type K thermocouple | -5 to +50 | 23 to 122 | 400 | 752 | 2 x 1.2V AA size NiMH | 8 (discharged capacity: 1900mAh) | 10 (2 minimum) | Ver. 2.1 + EDR SPP | Approx. 5 m |
| | excl. battery | | | | | | | | | | | | |

Accessory: 1 x Soft case

Display: Transmission type TFT color liquid crystal

| Software | Medium | Environment | | | | | | Others |
|-------------------------------|--------|---|----------------|--------------------------|---|----------------------------|---|---|
| | | Operating System | CPU | Memory (RAM) | Hard disk | Display resolution (pixel) | | |
| Trap Survey App PM510* | CD-ROM | Windows 7, Windows 8/8.1, Windows 10 (32 or 64 bit) | 1.6GHz or more | 4GB or more | 20GB or more free space (excl. Data area) | 1280 x 800 or more | Bluetooth: Ver.2.1 + EDR SPP Microsoft NET Framework 4.5 Microsoft SQL Server Compact 3.5 SP2 | |
| SurveyPro PM530 V4.0 | | | 1GHz or more | 1GB (64bit: 2GB) or more | | 1024 x 768 or more | | Microsoft NET Framework 4.5 Microsoft SQL Server Compact 3.5 SP2 USB Port, CD Drive |

* PM510 is to be installed on a tablet. The above specifications of PM510 are hardware requirement for the tablet.

Steam Trap Management System

Dr. Trap®


Trap Survey App PM510

The App displays and stores the survey results from the checker. It includes a lot of new and additional functions such as viewing and editing a survey map or a camera function. It can contribute to create a paperless environment. The available functions depend on the version of SurveyPro 4.0, standard or special.

Main Functions


Survey screen

The touch-screen tablet makes it easy to browse and edit a survey list. A lot of detailed information is available on the survey screen and can be edited there. The survey log information will be also displayed on the screen.

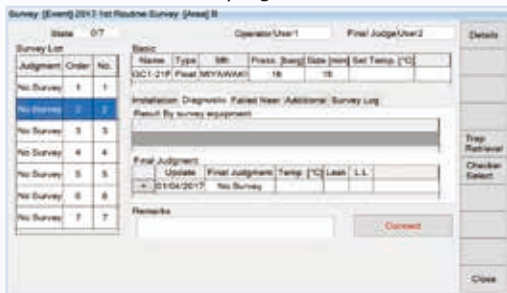

Survey map

A survey map can be displayed and edited on the tablet computer. The map can be associated with each steam trap on the survey list. Then, the order of the steam trap survey can be set.

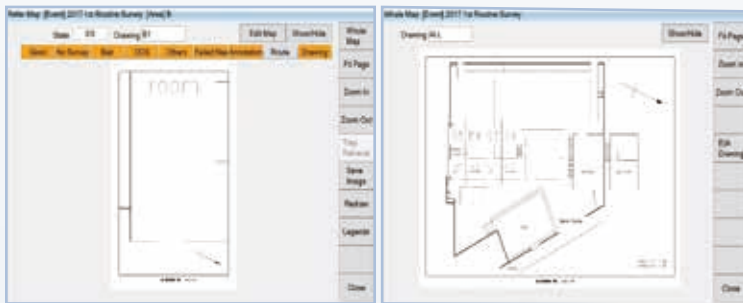

Camera function

The camera function allows to take images and record videos on the Camera screen. It is possible to edit and save the images for each steam trap. The images and videos will be displayed on the detailed screen of each steam trap.

PM510 Function correspondence table

Several functions of PM510 are unavailable depending on the version of PM530.

[○] : Available, [-] : Unavailable

| PM510 Function | PM530 | |
|--------------------|----------|---------|
| | Standard | Special |
| List Import/Export | ○ | ○ |
| List Retrieval | ○ | ○ |
| Edit Area | ○ | ○ |
| Survey | ○ | ○ |
| Survey map | - | ○ |
| Whole map | - | ○ |
| Edit Drawing | - | ○ |
| Camera | - | ○ |

SurveyPro 4.0 PM530

The software was updated from SurveyPro V3.1. It offers to analyse survey data, view trends, and manage survey files. Same as V3.1, it displays various summary sheets and graphs depending on the purpose, and export them to Excel and image files. It helps to create survey reports. Standard and Special versions are available.

Upgraded Functions


Single Sheet

Each survey list can be displayed as a Single Sheet. Then, it can be exported to Excel as well. It is possible to browse and edit survey list detail information on the sheet at once.



Data Summary Sheet


Different from the previous version, SurveyPro V3.1, the data summary sheets will be displayed as one sheet. Consequently, it is easier to use various analysis functions to create summary sheets such as by Manufacturer and by Type. The summaries of all data can be displayed in graphical form same as V3.1.

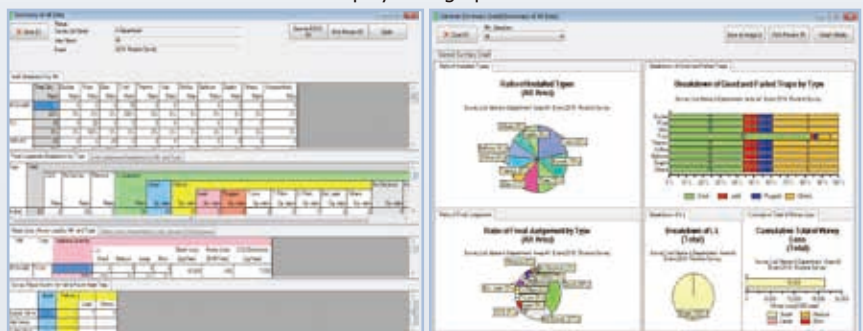

The MIYAWAKI SCCV®-System: worldwide patented

MIYAWAKI's internationally patented Self Closing and Centering Valve SCCV®-System has proven its high reliability and effectiveness during more than two decades. Many thousands of steam traps equipped with the SCCV®-System have proven enormous advantages for our customers:

1. A substantially longer service life compared with other steam traps
2. No partial or one-sided precipitate wear of valve and seat
3. Greatly reduced wear of all internal parts due to the reduction of the closing forces required to maintain a seal
4. No steam loss for all Temperature Control Traps




The MIYAWAKI SCCV®-System: variable adjusted to various types

Intensive research and development activities over many years have enabled MIYAWAKI to incorporate the SCCV®-System in various types of steam traps. Thus it became possible to adopt the SCCV®-System to a wide pressure range and to utilize the SCCV®-System not only for Bimetal Steam Traps, but also for Inverted Bucket and Float Type Steam Traps.


Inverted Bucket Steam Traps Series ES

The Valve Holder is fixed to a specially developed "Super-Lever". The Valve is "free floating" inside the Valve Holder. Thus the control space inside the Valve Holder decreases the force toward the seat caused by the movement of the bucket. The Valve will close softly and exactly in the center of the seat.




Inverted Bucket Steam Traps Series ER

The SCCV®-System is part of a "Double Valve Unit", which is operating on the basis of the pressure difference inside the unit. The trap is thus characterized by extended lifetime of the valve assembly and a greater condensate discharge per body size when compared to conventional inverted bucket steam traps.

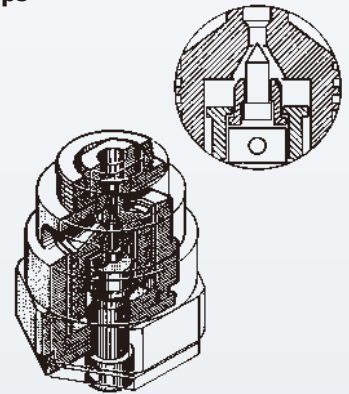


Ball Float Steam Trap G11N, G12N

The Valve (Ball) lies inside a Valve Holder, which is directly connected through a lever with the float. By installing a spring inside the Valve Holder the movements of the float and the forces caused by it will not be directly transferred to the Valve. This will increase the service life of the sealing surfaces.



Temperature Control Steam Trap TB7N

The Bimetal Unit including the valve are guided inside the body. A spring reduces the force caused by the deflection of the bimetals which move the valve toward the seat. The guiding of the valve within the seat and the lift of the valve is designed in such a way that the valve will close very smoothly in the center of the seat.

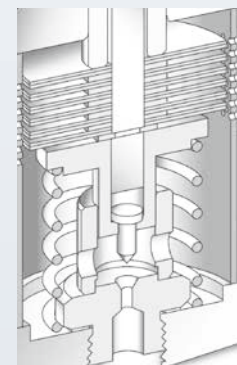

MIYAWAKI-Technology

SCCV[®]-System

Basic Principle

Regulating

The design of the Valve and Seat and the Valve lift (distance between the closed and open position of the valve) are calculated and designed in such a way that the valve closes its seat at the time that the condensate reaches the steam trap adjusted temperature.


Centering and Soft Closing

The valve is "free floating" inside the valve holder. The valve moves to the center caused by the pressure and the flow of condensate. The tip of the valve is drawn down to the center axis of the valve seat. A spring and a stop ring inside the control chamber absorb and soften the movement of the valve (caused by the temperature and pressure of the steam system) towards its seat. The centering and soft closing characteristics prevents premature or uneven wearing of the valve and its seat, extending the lifetime of the steam trap.


No Steam Loss

The valve closes exactly in the center of the seat at the adjusted temperature, slightly below the saturation temperature assuring Zero steam loss.



TB51

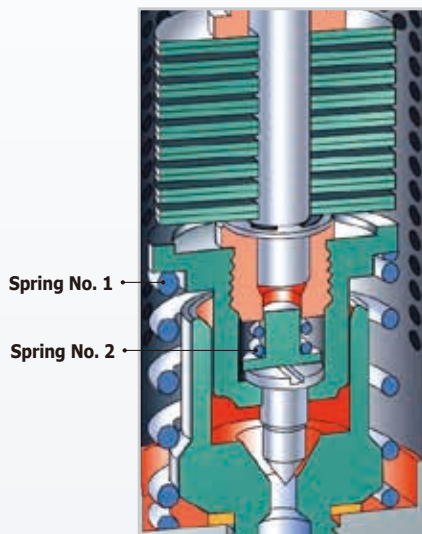

TB7N

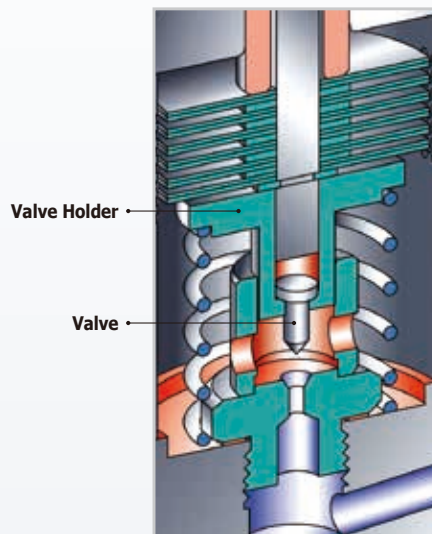

TB9N

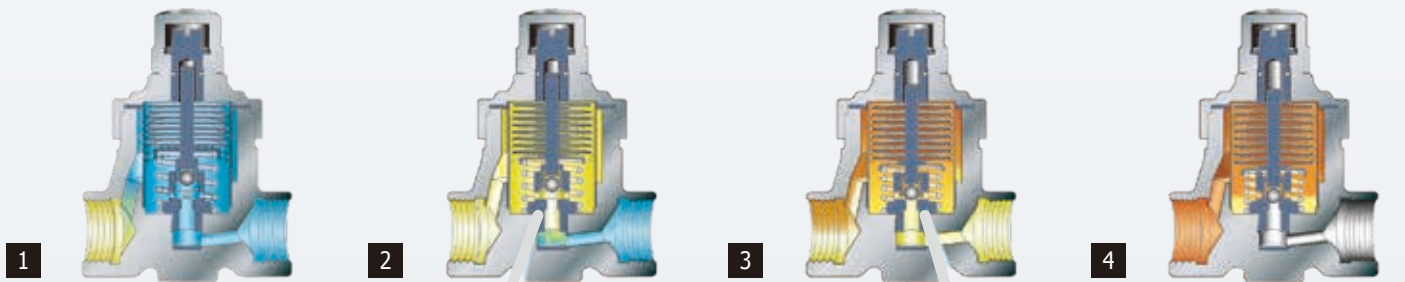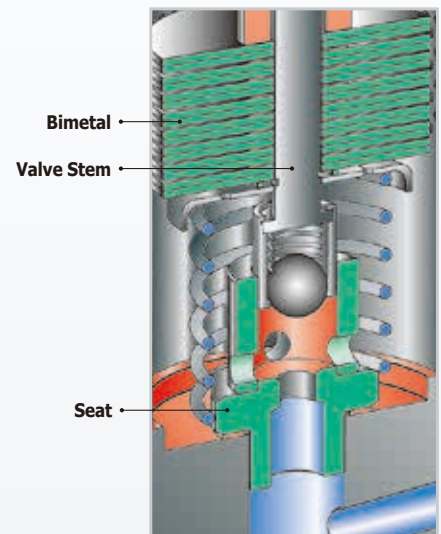


1 On start-up, the bimetal discs are all flat and the valve shaft is up with the valve fully open. Virtually all cold condensate and air are discharged.

2 As the temperature of the condensate increases, the bimetal discs begin to curve gradually and force the valve shaft and the valve holder to move down.

3 When condensate with higher temperature (near to set temperature) flows in, the bimetal discs are curved even more and, at the same time, the valve shaft moves down and the valve holder closes the holes in the guide partially.

4 In case of very low condensate flow, the holes in the guide are closed completely by the valve holder and the valve will close precisely in the center of the seat. Normally, the trap is filled with hot condensate and the operation will rest in the state shown in figure 3. Condensate will be discharged continuously.

Most of the condensate is still discharged quickly, since the valve and the holes in the fixed guide on the valve seat are still fully open.

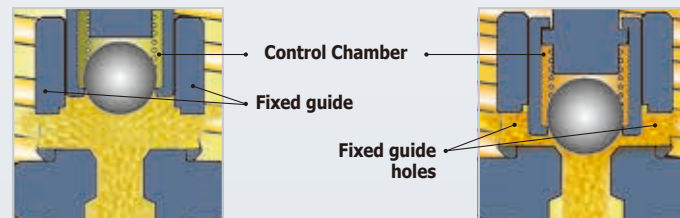

The amount of condensate being discharged is reduced quickly. This prolongs the time that the hot condensate stays near the bimetal discs and the heat of the condensate is transferred to the bimetal discs much more effectively.

Material Standards

Following you find a list of materials mainly used by MIYAWAKI for its Steam Traps, according to Japanese Standards and the most closely corresponding numbers of American (ASTM), European (EN) and German (DIN) Standards.

1. Iron Castings

| JIS | ASTM | EN | DIN |
|--------|----------------------|---------------------------|------------------|
| FC200 | A48 – class 30 | EN-GJL-200 | GG-20 (0.6020) |
| FC250 | A48 – class 35 | EN-GJL-250 (EN-JL 1040) | GG-25 (0.6025) |
| FCD400 | A536-584 Gr.60-40-18 | EN-GJS-400-15 (EN-JS1030) | GGG40 (0.7040) |
| FCD450 | A536 65-45-12 | EN-GJS-450-10 (EN-JS1040) | GGG40.3 (0.7043) |

2. Steel Casting and Forgings

| JIS | ASTM | EN | DIN |
|----------|------------|-----------------------|---------------------|
| S25C | A181 Gr. I | C25E (1.1158) | Ck25 |
| SCPH 2 | A216WCB | GP240GH (1.0619) | GS-C25 |
| SCPH 21 | A217WC6 | G17CrMo5-5 (1.7357) | GS17CrMo55 (1.7357) |
| SCPH32 | A217WC9 | GS12CrMo9-10 (1.7380) | 10CrMo9-10 (1.7380) |
| SFVC2A | A105 | P250GH (1.0460) | C22.8 (1.0460) |
| SFVAF22B | A182F22 | 10CrMo9-10 (1.7380) | 10CrMo9-10 (1.7380) |

3. Stainless and Heat Resisting Steels


| JIS | ASTM | EN | DIN |
|----------|------------|---------------------------|-------------------------|
| SCS13 | – | – | G-X6CrNi189 (1.4308) |
| SCS13A | A351CF8 | GX5CrNi19-10 (1.4308) | G-X6CrNi189 (1.4308) |
| SCS14 | A351CF8M | GX5CrNiMo19-11-2 (1.4408) | G-X6CrNiMo1810 (1.4408) |
| SUS303 | A582S30300 | X8CrNiS18-9 (1.4305) | X10CrNiS189 (1.4305) |
| SUS304 | A276S30400 | X5CrNi18-10 (1.4301) | X5CrNi1810 (1.4301) |
| SUSF304 | A182F304 | – | – |
| SUS316 | A276316 | X5CrNiMo17-12-2 (1.4401) | X2CrNiMo1810 (1.4401) |
| SUS321 | A240 321 | X6CrNiTi18-10 (1.4541) | X6CrNiTi18-10 (1.4541) |
| SUS403 | A276S40300 | X6Cr13 (1.4000) | X6Cr13 (1.4000) |
| SUS416 | – | X12CrS13 (1.4005) | X12CrS13 (1.4005) |
| SUS420J2 | – | X30Cr13 (1.4028) | X30Cr13 (1.4028) |

4. Alloys

| JIS | ASTM | EN | DIN |
|---------|-------------------|--------------------|-------------------|
| CAC502C | C90700 | CuSn10-C (CC480K) | CuSn10-C (CC480K) |
| C3771 | C37700 (B 124-89) | CuZn39Pb2 (CW612N) | CuZn39Pb2 |

Diameters and Drilling of Flanges

(see Page 97)

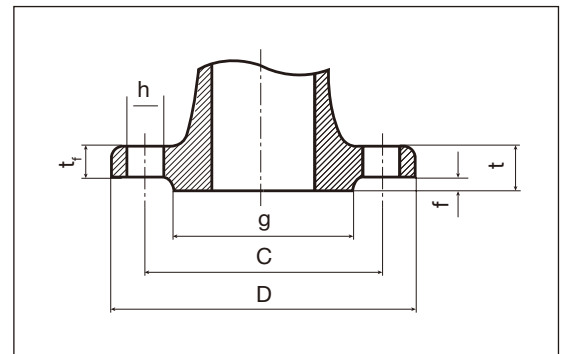

Conversion Factors

$$T_{°C} = \frac{5}{9}(T_{°F} - 32) \quad T_{°F} = 1,8 T_{°C} + 32$$

| °C | °F | °F | °C | °F | °F |
|------|-----|-----|-----|-----|------|
| 10,0 | 50 | 122 | 127 | 260 | 500 |
| 12,8 | 55 | 131 | 132 | 270 | 518 |
| 15,6 | 60 | 140 | 138 | 280 | 536 |
| 18,3 | 65 | 149 | 143 | 290 | 554 |
| 21,1 | 70 | 158 | 149 | 300 | 572 |
| 23,9 | 75 | 167 | 154 | 310 | 590 |
| 26,7 | 80 | 176 | 160 | 320 | 608 |
| 29,2 | 85 | 185 | 166 | 330 | 626 |
| 32,2 | 90 | 194 | 171 | 340 | 644 |
| 35,0 | 95 | 203 | 177 | 350 | 662 |
| 37,8 | 100 | 212 | 182 | 360 | 680 |
| 40,6 | 105 | 221 | 188 | 370 | 698 |
| 43 | 110 | 230 | 193 | 380 | 716 |
| 46 | 115 | 239 | 199 | 390 | 734 |
| 49 | 120 | 248 | 204 | 400 | 752 |
| 52 | 125 | 257 | 210 | 410 | 770 |
| 54 | 130 | 266 | 216 | 420 | 788 |
| 57 | 135 | 275 | 221 | 430 | 806 |
| 60 | 140 | 284 | 227 | 440 | 824 |
| 63 | 145 | 293 | 232 | 450 | 842 |
| 66 | 150 | 302 | 238 | 460 | 860 |
| 68 | 155 | 311 | 243 | 470 | 878 |
| 71 | 160 | 320 | 249 | 480 | 896 |
| 74 | 165 | 329 | 254 | 490 | 914 |
| 77 | 170 | 338 | 260 | 500 | 932 |
| 79 | 175 | 347 | 266 | 510 | 950 |
| 82 | 180 | 356 | 271 | 520 | 968 |
| 85 | 185 | 365 | 277 | 530 | 986 |
| 88 | 190 | 374 | 282 | 540 | 1004 |
| 91 | 195 | 383 | 288 | 550 | 1022 |
| 93 | 200 | 392 | 293 | 560 | 1040 |
| 99 | 210 | 410 | 299 | 570 | 1058 |
| 104 | 220 | 428 | 304 | 580 | 1076 |
| 110 | 230 | 446 | 310 | 590 | 1094 |
| 116 | 240 | 464 | 316 | 600 | 1112 |
| 121 | 250 | 482 | | | |

American Standard ASME B 16.5-2009

| Size (in) | Dimensions | class 150 | | class 300 | | class 600 | | class 900 | | class 1500 | |
|-----------|------------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|------------|----------|
| | | in | mm | in | mm | in | mm | in | mm | in | mm |
| 1/2" | D | 3.5 | 90 | 3.75 | 95 | 3.75 | 95 | 4.75 | 120 | 4.75 | 120 |
| | tr | 0.38 | 9,6 | 0.5 | 12,7 | 0.56 | 14,3 | 0.88 | 22,3 | 0.88 | 22,3 |
| | f | 0.06 | 2 | 0.06 | 2 | 0.25 | 7 | 0.25 | 7 | 0.25 | 7 |
| | g | 1.38 | 34,9 | 1.38 | 34,9 | 1.38 | 34,9 | 1.38 | 34,9 | 1.38 | 34,9 |
| | C | 2.38 | 60,3 | 2.62 | 66,7 | 2.62 | 66,7 | 3.25 | 82,6 | 3.25 | 82,6 |
| | n x h | 4 x 5/8 | 4 x 15,9 | 4 x 5/8 | 4 x 15,9 | 4 x 5/8 | 4 x 15,9 | 4 x 7/8 | 4 x 22,2 | 4 x 7/8 | 4 x 22,2 |
| 3/4" | D | 3.88 | 100 | 4.62 | 115 | 4.62 | 115 | 5.12 | 130 | 5.12 | 130 |
| | t | 0.44 | 11,2 | 0.56 | 14,3 | 0.62 | 15,9 | 1 | 25,4 | 1 | 25,4 |
| | f | 0.06 | 2 | 0.06 | 2 | 0.25 | 7 | 0.25 | 7 | 0.25 | 7 |
| | g | 1.69 | 42,9 | 1.69 | 42,9 | 1.69 | 42,9 | 1.69 | 42,9 | 1.69 | 42,9 |
| | C | 2.75 | 69,9 | 3.25 | 82,6 | 3.25 | 82,6 | 3.5 | 88,9 | 3.5 | 88,9 |
| | n x h | 4 x 5/8 | 4 x 15,9 | 4 x 3/4 | 4 x 19,0 | 4 x 3/4 | 4 x 19,0 | 4 x 7/8 | 4 x 22,2 | 4 x 7/8 | 4 x 22,2 |
| 1" | D | 4.25 | 110 | 4.88 | 125 | 4.88 | 125 | 5.88 | 150 | 5.88 | 150 |
| | t | 0.5 | 12,7 | 0.62 | 15,9 | 0.69 | 17,5 | 1.12 | 28,6 | 1.12 | 28,6 |
| | f | 0.06 | 2 | 0.06 | 2 | 0.25 | 7 | 0.25 | 7 | 0.25 | 7 |
| | g | 2 | 50,8 | 2 | 50,8 | 2 | 50,8 | 2 | 50,8 | 2 | 50,8 |
| | C | 3.12 | 79,4 | 3.5 | 88,9 | 3.5 | 88,9 | 4 | 101,6 | 4 | 101,6 |
| | n x h | 4 x 5/8 | 4 x 15,9 | 4 x 3/4 | 4 x 19,0 | 4 x 3/4 | 4 x 19,0 | 4 x 1 | 4 x 25,4 | 4 x 1 | 4 x 25,4 |
| 1 1/4" | D | 4.62 | 115 | 5.25 | 135 | 5.25 | 135 | 6.25 | 160 | 6.25 | 160 |
| | t | 0.56 | 14,3 | 0.69 | 17,5 | 0.81 | 20,7 | 1.12 | 28,6 | 1.12 | 28,6 |
| | f | 0.06 | 2 | 0.06 | 2 | 0.25 | 7 | 0.25 | 7 | 0.25 | 7 |
| | g | 2.5 | 63,5 | 2.5 | 63,5 | 2.5 | 63,5 | 2.5 | 63,5 | 2.5 | 63,5 |
| | C | 3.5 | 88,9 | 3.88 | 98,4 | 3.88 | 98,4 | 4.38 | 111,1 | 4.38 | 111,1 |
| | n x h | 4 x 5/8 | 4 x 15,9 | 4 x 3/4 | 4 x 19,0 | 4 x 3/4 | 4 x 19,0 | 4 x 1 | 4 x 25,4 | 4 x 1 | 4 x 25,4 |
| 1 1/2" | D | 5 | 125 | 6.12 | 155 | 6.12 | 155 | 7 | 180 | 7 | 180 |
| | t | 0.62 | 15,9 | 0.75 | 19,1 | 0.88 | 22,3 | 1.25 | 31,8 | 1.25 | 31,8 |
| | f | 0.06 | 2 | 0.06 | 2 | 0.25 | 7 | 0.25 | 7 | 0.25 | 7 |
| | g | 2.88 | 73 | 2.88 | 73 | 2.88 | 73 | 2.88 | 73 | 2.88 | 73 |
| | C | 3.88 | 98,4 | 4.5 | 114,3 | 4.5 | 114,3 | 4.88 | 123,8 | 4.88 | 123,8 |
| | n x h | 4 x 5/8 | 4 x 15,9 | 4 x 7/8 | 4 x 22,2 | 4 x 7/8 | 4 x 22,2 | 4 x 1 1/8 | 4 x 28,6 | 4 x 1 1/8 | 4 x 28,6 |
| 2" | D | 6 | 150 | 6.5 | 165 | 6.5 | 165 | 8.5 | 215 | 8.5 | 215 |
| | t | 0.69 | 17,5 | 0.81 | 20,7 | 1 | 25,4 | 1.5 | 38,1 | 1.5 | 38,1 |
| | f | 0.06 | 2 | 0.06 | 2 | 0.25 | 7 | 0.25 | 7 | 0.25 | 7 |
| | g | 3.62 | 92,1 | 3.62 | 92,1 | 3.62 | 92,1 | 3.62 | 92,1 | 3.62 | 92,1 |
| | C | 4.75 | 120,7 | 5 | 127 | 5 | 127 | 6.5 | 165,1 | 6.5 | 165,1 |
| | n x h | 4 x 3/4 | 4 x 19,0 | 8 x 3/4 | 8 x 19,0 | 8 x 3/4 | 8 x 19,0 | 8 x 1 | 8 x 25,4 | 8 x 1 | 8 x 25,4 |

Japanese Standard: JIS B 2210 – 1984

| Size (in) | Dimensions | Dimensions at Pressure Rating (mm) | | | | | |
|-----------|------------|------------------------------------|--------|--------|--------|--------|--------|
| | | 10 K | 16 K | 20 K | 30 K | 40 K | 63 K |
| 1/2" | D | 95 | 95 | 95 | 115 | 115 | 120 |
| | t | 12 | 12 | 14 | 18 | 20 | 23 |
| | f | 1 | 1 | 1 | 1 | 1 | 1 |
| | g | 51 | 51 | 51 | 55 | 55 | 55 |
| | C | 70 | 70 | 70 | 80 | 80 | 80 |
| | n x h | 4 x 15 | 4 x 15 | 4 x 15 | 4 x 19 | 4 x 19 | 4 x 19 |
| 3/4" | D | 100 | 100 | 100 | 120 | 120 | 135 |
| | t | 14 | 14 | 16 | 18 | 20 | 25 |
| | f | 1 | 1 | 1 | 1 | 1 | 1 |
| | g | 56 | 56 | 56 | 60 | 60 | 60 |
| | C | 75 | 75 | 75 | 85 | 85 | 95 |
| | n x h | 4 x 15 | 4 x 15 | 4 x 15 | 4 x 19 | 4 x 19 | 4 x 23 |
| 1" | D | 125 | 125 | 125 | 130 | 130 | 140 |
| | t | 14 | 14 | 16 | 20 | 22 | 27 |
| | f | 1 | 1 | 1 | 1 | 1 | 1 |
| | g | 67 | 67 | 67 | 70 | 70 | 70 |
| | C | 90 | 90 | 90 | 95 | 95 | 100 |
| | n x h | 4 x 19 | 4 x 19 | 4 x 19 | 4 x 19 | 4 x 19 | 4 x 23 |
| 1 1/4" | D | 135 | 135 | 135 | 140 | 140 | 150 |
| | t | 16 | 16 | 18 | 22 | 24 | 30 |
| | f | 2 | 2 | 2 | 2 | 2 | 2 |
| | g | 76 | 76 | 76 | 80 | 80 | 80 |
| | C | 100 | 100 | 100 | 105 | 105 | 110 |
| | n x h | 4 x 19 | 4 x 19 | 4 x 19 | 4 x 19 | 4 x 19 | 4 x 23 |
| 1 1/2" | D | 140 | 140 | 140 | 160 | 160 | 175 |
| | t | 16 | 16 | 18 | 22 | 24 | 32 |
| | f | 2 | 2 | 2 | 2 | 2 | 2 |
| | g | 81 | 81 | 81 | 90 | 90 | 90 |
| | C | 105 | 105 | 105 | 120 | 120 | 130 |
| | n x h | 4 x 19 | 4 x 19 | 4 x 19 | 4 x 23 | 4 x 23 | 4 x 25 |
| 2" | D | 155 | 155 | 155 | 165 | 165 | 185 |
| | t | 16 | 16 | 18 | 22 | 26 | 34 |
| | f | 2 | 2 | 2 | 2 | 2 | 2 |
| | g | 96 | 96 | 96 | 105 | 105 | 105 |
| | C | 120 | 120 | 120 | 130 | 130 | 145 |
| | n x h | 4 x 19 | 8 x 19 | 8 x 19 | 8 x 19 | 8 x 19 | 8 x 23 |

European Standard EN 1092-1

| Size (in) | Dimensions | PN 10 | PN 16 | PN 25 | PN 40 | PN 63 | PN 100 |
|-----------|------------|--------|--------|--------|--------|--------|--------|
| | | mm | mm | mm | mm | mm | mm |
| DN15 | D | 95 | 95 | 95 | 95 | 105 | 105 |
| | t | 16 | 16 | 16 | 16 | 20 | 20 |
| | f | 2 | 2 | 2 | 2 | 2 | 2 |
| | g | 45 | 45 | 45 | 45 | 45 | 45 |
| | C | 65 | 65 | 65 | 65 | 75 | 75 |
| | n x h | 4 x 14 | 4 x 14 | 4 x 14 | 4 x 14 | 4 x 14 | 4 x 14 |
| DN20 | D | 105 | 105 | 105 | 105 | 130 | 130 |
| | t | 18 | 18 | 18 | 18 | 22 | 22 |
| | f | 2 | 2 | 2 | 2 | 2 | 2 |
| | g | 58 | 58 | 58 | 58 | 58 | 58 |
| | C | 75 | 75 | 75 | 75 | 90 | 90 |
| | n x h | 4 x 14 | 4 x 14 | 4 x 14 | 4 x 14 | 4 x 18 | 4 x 18 |
| DN25 | D | 115 | 115 | 115 | 115 | 140 | 140 |
| | t | 18 | 18 | 18 | 18 | 24 | 24 |
| | f | 2 | 2 | 2 | 2 | 2 | 2 |
| | g | 68 | 68 | 68 | 68 | 68 | 68 |
| | C | 85 | 85 | 85 | 85 | 100 | 100 |
| | n x h | 4 x 14 | 4 x 14 | 4 x 14 | 4 x 14 | 4 x 18 | 4 x 18 |
| DN32 | D | 140 | 140 | 140 | 140 | 155 | 155 |
| | t | 18 | 18 | 18 | 18 | 24 | 24 |
| | f | 2 | 2 | 2 | 2 | 2 | 2 |
| | g | 78 | 78 | 78 | 78 | 78 | 78 |
| | C | 100 | 100 | 100 | 100 | 110 | 110 |
| | n x h | 4 x 18 | 4 x 18 | 4 x 18 | 4 x 18 | 4 x 22 | 4 x 22 |
| DN40 | D | 150 | 150 | 150 | 150 | 170 | 170 |
| | t | 18 | 18 | 18 | 18 | 26 | 26 |
| | f | 3 | 3 | 3 | 3 | 3 | 3 |
| | g | 88 | 88 | 88 | 88 | 88 | 88 |
| | C | 110 | 110 | 110 | 110 | 125 | 125 |
| | n x h | 4 x 18 | 4 x 18 | 4 x 18 | 4 x 18 | 4 x 22 | 4 x 22 |
| DN50 | D | 165 | 165 | 165 | 165 | 180 | 195 |
| | t | 18 | 18 | 20 | 20 | 26 | 28 |
| | f | 3 | 3 | 3 | 3 | 3 | 3 |
| | g | 102 | 102 | 102 | 102 | 102 | 102 |
| | C | 125 | 125 | 125 | 125 | 135 | 145 |
| | n x h | 4 x 18 | 4 x 18 | 4 x 18 | 4 x 18 | 4 x 22 | 4 x 26 |

Pressure

Conversion Table from psi to bar

| psi | bar | psi | bar | psi | bar | psi | bar | psi | bar | psi | bar |
|-------|------|-------|-------|-------|-------|-------|-------|-------|-------|------|--------|
| 1 | 0,07 | 105 | 7,24 | 310 | 21,37 | 510 | 35,17 | 820 | 56,55 | 1250 | 86,19 |
| 1,5 | 0,1 | 108,8 | 7,5 | 319,0 | 22,0 | 514,8 | 35,5 | 826,5 | 57,0 | 1276 | 88,0 |
| 5 | 0,34 | 110 | 7,58 | 320 | 22,06 | 520 | 35,86 | 840 | 57,93 | 1300 | 89,66 |
| 7,3 | 0,5 | 116,0 | 8,0 | 326,3 | 22,5 | 522,0 | 36,0 | 855,5 | 59,0 | 1305 | 90,0 |
| 10 | 0,69 | 120 | 8,27 | 330 | 22,75 | 530 | 36,55 | 860 | 59,31 | 1350 | 93,08 |
| 14,5 | 1,0 | 123,3 | 8,5 | 333,5 | 23,0 | 536,5 | 37,0 | 870,0 | 60,0 | 1378 | 95,0 |
| 15 | 1,03 | 130 | 8,96 | 340 | 23,44 | 540 | 37,24 | 880 | 60,69 | 1400 | 96,55 |
| 18,9 | 1,3 | 130,5 | 9,0 | 348,0 | 24,00 | 543,8 | 37,5 | 899,0 | 62,0 | 1407 | 97,0 |
| 20 | 1,38 | 140 | 9,65 | 350 | 24,13 | 550 | 37,92 | 900 | 62,06 | 1450 | 100,00 |
| 21,8 | 1,5 | 145,0 | 10,00 | 355,3 | 24,5 | 551,0 | 38,0 | 913,5 | 63,0 | 1479 | 102,0 |
| 25 | 1,72 | 150 | 10,34 | 360 | 24,82 | 560 | 38,62 | 920 | 63,45 | 1500 | 103,45 |
| 29,0 | 2,0 | 159,5 | 11,0 | 362,5 | 25,0 | 565,5 | 39,0 | 928,0 | 64,0 | 1523 | 105,0 |
| 30 | 2,07 | 160 | 11,03 | 370 | 25,51 | 570 | 39,31 | 940 | 64,83 | 1550 | 106,87 |
| 33,4 | 2,3 | 166,8 | 11,5 | 377,0 | 26,00 | 572,8 | 39,5 | 942,5 | 65,0 | 1595 | 110,0 |
| 35 | 2,41 | 170 | 11,72 | 380 | 26,20 | 580 | 40,00 | 960 | 66,21 | 1600 | 110,32 |
| 36,3 | 2,5 | 174,0 | 12,0 | 384,3 | 26,5 | 587,3 | 40,5 | 971,5 | 67,0 | 1624 | 112,0 |
| 40 | 2,76 | 180 | 12,41 | 390 | 26,89 | 590 | 40,69 | 980 | 67,59 | 1650 | 113,77 |
| 43,5 | 3,0 | 188,5 | 13,0 | 391,5 | 27,0 | 594,5 | 41,0 | 986,0 | 68,0 | 1668 | 115,0 |
| 45 | 3,10 | 190 | 13,10 | 400 | 27,85 | 600 | 41,37 | 1000 | 68,95 | 1700 | 117,22 |
| 47,9 | 3,3 | 195,8 | 13,5 | 406,0 | 28,0 | 609,0 | 42,0 | 1015 | 70,0 | 1711 | 118,0 |
| 50 | 3,45 | 200 | 13,79 | 410 | 28,27 | 620 | 42,76 | 1020 | 70,34 | 1750 | 120,66 |
| 50,8 | 3,5 | 203,0 | 14,0 | 413,3 | 28,5 | 623,5 | 43,0 | 1029 | 71,0 | 1784 | 123,0 |
| 55 | 3,79 | 210 | 14,48 | 420 | 28,96 | 640 | 44,14 | 1040 | 71,72 | 1800 | 124,11 |
| 58,0 | 4,0 | 217,5 | 15,0 | 420,5 | 29,0 | 652,5 | 45,0 | 1044 | 72,0 | 1813 | 125,0 |
| 60 | 4,14 | 220 | 15,17 | 430 | 29,65 | 660 | 45,52 | 1060 | 73,10 | 1850 | 127,56 |
| 62,4 | 4,3 | 224,8 | 15,5 | 435,0 | 30,0 | 667,0 | 46,0 | 1073 | 74,0 | 1885 | 130,0 |
| 65 | 4,48 | 230 | 15,86 | 440 | 30,34 | 680 | 46,90 | 1080 | 74,48 | 1900 | 131,01 |
| 65,3 | 4,5 | 232,0 | 16,0 | 449,5 | 31,0 | 696,0 | 48,0 | 1088 | 75,0 | 1929 | 133,0 |
| 70 | 4,83 | 240 | 16,55 | 450 | 31,03 | 700 | 48,27 | 1100 | 75,86 | 1950 | 134,45 |
| 72,5 | 5,0 | 246,5 | 17,0 | 456,8 | 31,5 | 710,5 | 49,0 | 1117 | 77,0 | 1958 | 135,0 |
| 75 | 5,17 | 250 | 17,24 | 460 | 31,72 | 720 | 49,66 | 1120 | 77,24 | 2000 | 137,90 |
| 79,8 | 5,5 | 253,8 | 17,5 | 464,0 | 32,0 | 725,0 | 50,0 | 1131 | 78,0 | 2030 | 140,0 |
| 80 | 5,52 | 260 | 17,93 | 470 | 32,41 | 740 | 51,03 | 1140 | 78,62 | 2050 | 141,35 |
| 82,7 | 5,7 | 261,0 | 18,0 | 478,5 | 33,0 | 754,0 | 52,0 | 1146 | 79,0 | 2074 | 143,0 |
| 85 | 5,86 | 270 | 18,62 | 480 | 33,10 | 760 | 52,41 | 1160 | 80,00 | 2100 | 144,80 |
| 87,0 | 6,0 | 275,5 | 19,0 | 485,8 | 33,5 | 768,5 | 53,0 | 1175 | 81,0 | 2103 | 145,0 |
| 90 | 6,21 | 280 | 19,31 | 490 | 33,79 | 780 | 53,79 | 1180 | 81,38 | 2150 | 148,24 |
| 94,3 | 6,5 | 282,8 | 19,5 | 493,0 | 34,0 | 797,5 | 55,0 | 1189 | 82,0 | 2175 | 150,0 |
| 95 | 6,55 | 290 | 20,00 | 500 | 34,48 | 800 | 55,16 | 1200 | 82,76 | 2200 | 151,69 |
| 97,2 | 6,7 | 297,3 | 20,5 | 507,5 | 35,0 | 812 | 56,0 | 1233 | 85,0 | 2320 | 160,0 |
| 100 | 6,9 | 300 | 20,69 | | | | | | | | |
| 101,5 | 7,0 | 304,5 | 21,0 | | | | | | | | |

Conversion Factors


| Units of measurement | | | | | | | | |
|---------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|---------------------------|----------------------------|-----------------------------|
| Pa | kPa | MPa | bar | kg/cm ² | atm | mm H2O | mm Hg (Torr) | lbf/in ² (psi) |
| 1 | 0,001 | 1 x 10 ⁻⁶ | 1 x 10 ⁻⁵ | 1,01972 x 10 ⁻⁵ | 9,86923 x 10 ⁻⁶ | 0,101972 | 7,50062 x 10 ⁻³ | 1,450377 x 10 ⁻⁴ |
| 1000 | 1 | 0,001 | 0,01 | 0,0101972 | 9,86923 x 10 ⁻³ | 101,972 | 7,50062 | 0,1450377 |
| 1 x 10 ⁶ | 1000 | 1 | 10 | 10,1972 | 9,86923 | 1,01972 x 10 ⁵ | 7500,62 | 145,0377 |
| 1 x 10 ⁵ | 100 | 0,1 | 1 | 1,01972 | 0,986923 | 1,01972 x 10 ⁴ | 750,062 | 14,50377 |
| 9,80665 x 10 ⁴ | 98,0665 | 0,0980665 | 0,980665 | 1 | 0,967841 | 10000 | 735,559 | 14,22334 |
| 1,01325 x 10 ⁵ | 101,325 | 0,101325 | 1,01325 | 1,03323 | 1 | 10332,3 | 760,000 | 14,69595 |
| 9,80665 | 9,80665 x 10 ⁻³ | 9,80665 x 10 ⁻⁶ | 9,80665 x 10 ⁻⁵ | 0,0001 | 9,67841 x 10 ⁻⁵ | 1 | 0,0735559 | 0,001422334 |
| 133,322 | 0,133322 | 1,33222 x 10 ⁻⁴ | 0,00133322 | 0,00135951 | 0,00131579 | 13,5951 | 1 | 0,01933678 |
| 6894,76 | 6,89476 | 0,00689476 | 0,0689476 | 0,0703070 | 0,0680460 | 703,070 | 51,7149 | 1 |

Properties of Saturated Steam

| Absolute Pressure | Saturation Temperature | Steam Volume | Steam Density | Sensible Heat | Total Steam Heat | Latent Heat |
|-------------------|------------------------|---------------------------------------|--------------------------------------|-------------------------|--------------------------|---|
| p MPa | ts °C | v ^{''} m ³ /kg | ρ ^{''} kg/m ³ | h ['] kJ/kg | h ^{''} kJ/kg | r = h ^{''} - h ['] kJ/kg |
| 0,1 | 99,63 | 1,6940 | 0,5904 | 417,51 | 2.675,4 | 2.257,9 |
| 0,15 | 111,37 | 1,1590 | 0,8628 | 467,13 | 2.693,4 | 2.226,3 |
| 0,2 | 120,23 | 0,8854 | 1,1290 | 504,70 | 2.706,3 | 2.201,6 |
| 0,25 | 127,43 | 0,7184 | 1,3920 | 535,34 | 2.716,4 | 2.181,1 |
| 0,3 | 133,54 | 0,6056 | 1,6510 | 561,43 | 2.724,7 | 2.163,3 |
| 0,35 | 138,87 | 0,5240 | 1,9080 | 584,27 | 2.731,6 | 2.147,3 |
| 0,4 | 143,62 | 0,4622 | 2,1630 | 604,67 | 2.737,6 | 2.132,9 |
| 0,45 | 147,92 | 0,4138 | 2,4170 | 623,16 | 2.742,9 | 2.119,7 |
| 0,5 | 151,84 | 0,3747 | 2,6690 | 640,12 | 2.747,5 | 2.107,4 |
| 0,55 | 155,46 | 0,3426 | 2,9200 | 655,78 | 2.751,7 | 2.095,9 |
| 0,6 | 158,84 | 0,3155 | 3,1700 | 670,42 | 2.755,5 | 2.085,1 |
| 0,65 | 161,99 | 0,2925 | 3,4190 | 684,12 | 2.758,8 | 2.074,7 |
| 0,7 | 164,96 | 0,2727 | 3,6670 | 697,06 | 2.762,0 | 2.064,9 |
| 0,75 | 167,75 | 0,2554 | 3,9150 | 709,29 | 2.764,8 | 2.055,5 |
| 0,8 | 170,41 | 0,2403 | 4,1620 | 720,94 | 2.767,5 | 2.046,6 |
| 0,85 | 172,94 | 0,2268 | 4,4090 | 732,02 | 2.769,9 | 2.037,9 |
| 0,9 | 175,36 | 0,2148 | 4,6550 | 742,64 | 2.772,1 | 2.029,5 |
| 0,95 | 177,66 | 0,2040 | 4,9010 | 752,81 | 2.774,2 | 2.021,4 |
| 1,0 | 179,88 | 0,1930 | 5,1470 | 762,61 | 2.776,2 | 2.013,6 |
| 1,1 | 184,07 | 0,1747 | 5,6370 | 781,13 | 2.779,7 | 1.998,6 |
| 1,2 | 187,96 | 0,1632 | 6,1270 | 798,43 | 2.782,7 | 1.984,3 |
| 1,3 | 191,61 | 0,1511 | 6,6170 | 814,70 | 2.785,4 | 1.970,7 |
| 1,4 | 195,04 | 0,1407 | 7,1060 | 830,08 | 2.787,8 | 1.957,7 |
| 1,5 | 198,29 | 0,1317 | 7,5960 | 844,67 | 2.789,9 | 1.945,2 |
| 1,6 | 201,37 | 0,1237 | 8,0850 | 858,56 | 2.791,7 | 1.933,1 |
| 1,7 | 204,31 | 0,1166 | 8,5750 | 871,84 | 2.793,4 | 1.921,6 |
| 1,8 | 207,11 | 0,1103 | 9,0650 | 884,58 | 2.794,8 | 1.910,2 |
| 1,9 | 209,80 | 0,1047 | 9,5550 | 896,81 | 2.796,1 | 1.899,3 |
| 2,0 | 212,37 | 0,0996 | 10,0500 | 908,59 | 2.797,2 | 1.888,6 |
| 2,2 | 217,24 | 0,0907 | 11,0300 | 930,95 | 2.799,1 | 1.868,2 |
| 2,4 | 221,78 | 0,0832 | 12,0200 | 951,93 | 2.800,4 | 1.848,5 |
| 2,6 | 226,04 | 0,0769 | 13,0100 | 971,72 | 2.801,4 | 1.829,7 |
| 2,8 | 230,05 | 0,0714 | 14,0100 | 990,48 | 2.802,0 | 1.811,5 |
| 3,0 | 233,84 | 0,0666 | 15,0100 | 1.008,40 | 2.802,3 | 1.793,9 |
| 3,2 | 237,45 | 0,0624 | 16,0200 | 1.025,40 | 2.802,3 | 1.776,9 |
| 3,4 | 240,88 | 0,0587 | 17,0300 | 1.041,80 | 2.802,1 | 1.760,3 |
| 3,6 | 244,16 | 0,0554 | 18,0500 | 1.057,60 | 2.801,7 | 1.744,1 |
| 3,8 | 247,31 | 0,0524 | 19,0700 | 1.072,70 | 2.801,1 | 1.728,4 |
| 4,0 | 250,33 | 0,0498 | 20,1000 | 1.087,40 | 2.800,3 | 1.712,9 |
| 5,0 | 263,91 | 0,0394 | 25,3600 | 1.154,50 | 2.794,2 | 1.639,7 |
| 6,0 | 275,55 | 0,0324 | 30,8300 | 1.213,70 | 2.785,0 | 1.571,3 |
| 7,0 | 285,79 | 0,0274 | 36,5300 | 1.267,40 | 2.773,5 | 1.506,1 |
| 8,0 | 294,97 | 0,0235 | 42,5100 | 1.317,10 | 2.759,9 | 1.442,8 |
| 9,0 | 303,31 | 0,0205 | 46,7900 | 1.363,70 | 2.744,6 | 1.380,9 |
| 10,0 | 310,96 | 0,0180 | 55,4300 | 1.408,00 | 2.727,7 | 1.319,7 |
| 11,0 | 318,05 | 0,0160 | 62,4800 | 1.450,60 | 2.709,3 | 1.258,7 |
| 12,0 | 324,65 | 0,0143 | 70,0100 | 1.491,80 | 2.689,2 | 1.197,4 |
| 13,0 | 330,83 | 0,0128 | 78,1400 | 1.532,00 | 2.667,0 | 1.135,0 |
| 14,0 | 336,64 | 0,0115 | 86,9900 | 1.571,60 | 2.642,4 | 1.070,8 |
| 15,0 | 342,13 | 0,0103 | 86,7100 | 1.611,00 | 2.615,0 | 1.004,0 |
| 16,0 | 347,33 | 0,0093 | 107,4000 | 1.650,50 | 2.584,9 | 934,4 |
| 17,0 | 352,26 | 0,0084 | 119,5000 | 1.691,70 | 2.551,6 | 859,9 |
| 18,0 | 356,96 | 0,0075 | 133,4000 | 1.734,80 | 2.513,9 | 779,1 |
| 19,0 | 361,43 | 0,0067 | 149,8000 | 1.778,70 | 2.470,6 | 691,9 |
| 20,0 | 365,70 | 0,0059 | 170,2000 | 1.826,50 | 2.418,4 | 591,9 |
| 22,0 | 373,69 | 0,0037 | 268,3000 | 2.011,10 | 2.195,6 | 184,5 |
| 22,12 | 374,15 | 0,0032 | 315,5000 | 2.107,40 | 2.107,4 | 0,0 |



Environmentally friendly through reduced energy usage and improved steam efficiency

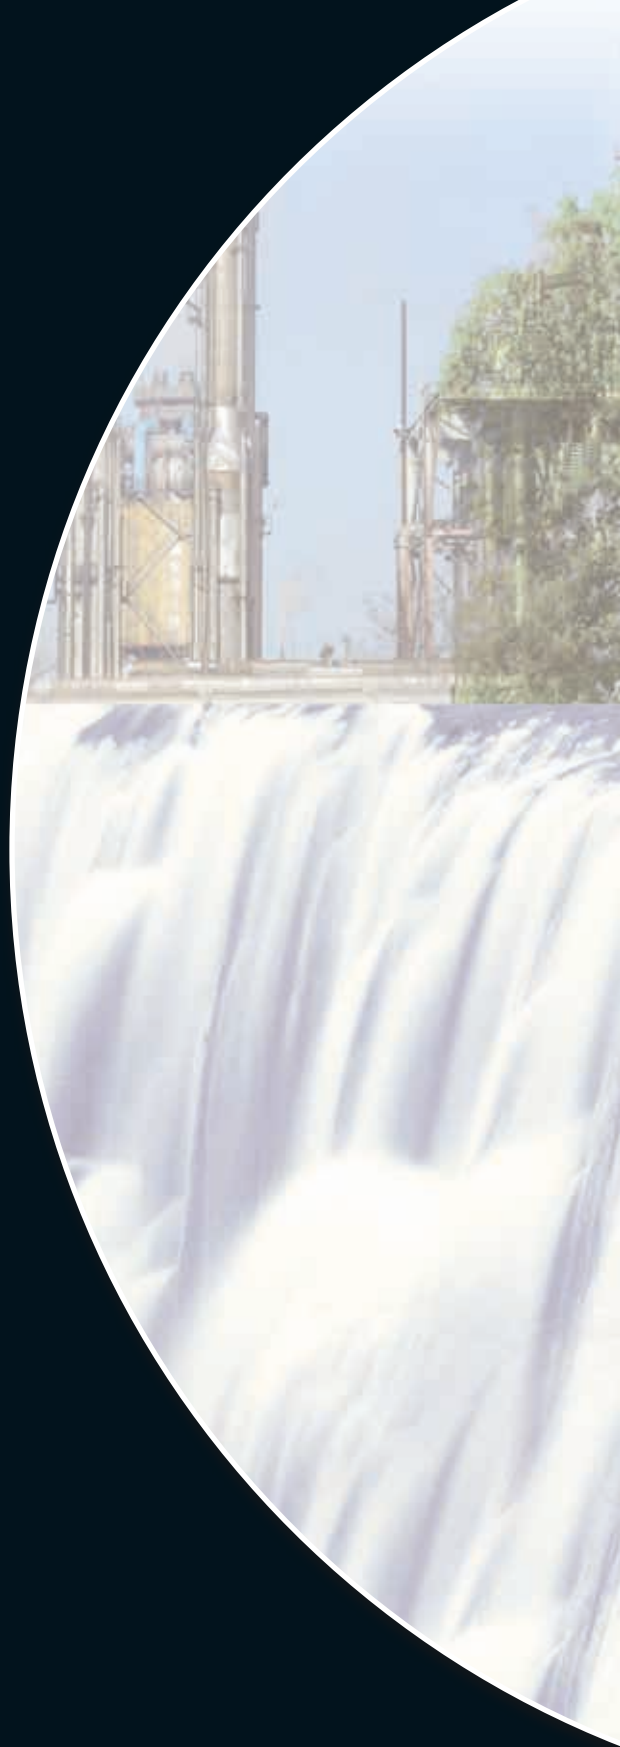

MIYAWAKI Inc.

2-1-30, Tagawakita, Yodogawa-ku
Osaka 532-0021
JAPAN

Tel: + 81 - 6 - 6302 - 5549
Fax: + 81 - 6 - 6305 - 7155
E-Mail: export@miyawaki-inc.co.jp
Website: www.miyawaki-inc.com/en/



MIYAWAKI GmbH

Birnbaumsmühle 65
15234 Frankfurt (Oder)
GERMANY

Tel: + 49 - 335 - 8694 - 5211
E-Mail: info@miyawaki.de
Website: www.miyawaki-inc.com/en/